

WWW.ADOPRODUCTS.COM | 800-666-8191

# A·D·O<sup>®</sup>

PRODUCTS YOU NEED. SERVICE WE DELIVER.



INSULATION & BUILDING ACCESSORIES

# PRODUCT CATALOG

VOLUME 25



PRODUCTS YOU NEED. SERVICE WE DELIVER.

## INSULATION AND BUILDING ACCESSORIES CATALOG

FIND US ONLINE @ [WWW.ADOPRODUCTS.COM](http://WWW.ADOPRODUCTS.COM)

### TO PLACE AN ORDER

You may conveniently order by phone, fax or email.

Most orders received before 12:00 pm CST will be shipped the same day.



### By Phone: Call 800-666-8191

Monday-Friday 7:00 am - 5:00 pm CST

### By Fax:

Send fax to 1-888-641-3904

### By Email:

Send your order to [sales@adoproducts.com](mailto:sales@adoproducts.com)

### ADO RETURN POLICY

#### **ADO will accept returns based on the following conditions:**

If the return is a result of an error made by ADO, a carrier, or vendor of ADO, we will gladly replace the item and credit all shipping charges and restock fees. All products that are to be returned MUST have a Return Authorization (RMA) number assigned. To receive an RMA number, please call your ADO Account Manager at 800-666-8191. All returns must be securely packed in the original packaging, received in resalable condition, and returned within 60 days of original shipment. Returns are subject to a 15% restock fee and return freight charges. No returns will be accepted on Special Order or Clearance items.

# TABLE OF CONTENTS

SEE OUR **NEW PRODUCTS** HERE! 

**DUROVENT®**

**VersiFoam®**

**proVent®**  
BAFFLE & XTENSION

**H**  
**Handi  
Foam®**

**Soudal**

**GRACO**

**Chem  
Trend**

**BINKS**  
A CARLISLE BRAND

**3M**

**MOLDEX**  
Ideas that wear well.

**Albion**  
DISPENSING SOLUTIONS

**BOSS**  
PRODUCTS

**MEMBRAIN**

**DURA-SKRIM®**

**LAMTEC®**

**PIRANHA 2.0 TOOLS**

**KRENDEL**

**intec**

**SurPro**

**VIPER CS**  
CRAWL SPACE VAPOR BARRIERS

**Your  
Crawlspace™**

**THE  
ATTIC  
DEPOT**

**ADO VENTS**

PG.4-6

**FOAM, EQUIPMENT, & ACCESSORIES**

PG.7-19

**PROTECTIVE EQUIPMENT**

PG.20-29

**CAULK, SEALANT, & ACCESSORIES**

PG.30-33

**TAPE**

PG.34-37

**SHEETING & BARRIERS**

PG.38-39

**FACING & NETTING**

PG.40-42

**STAPLES & TACKERS**

PG.43-44

**BLOWING ACCESSORIES**

PG.45-48

**BLOWING MACHINES**

PG.49-51

**VACUUMS & ACCESSORIES**

PG.52-53

**HOLE SAWS, PLUGS, SEALS**

PG.54-57

**KNIVES & BLADES**

PG.58-59

**ATTIC ACCESSORIES**

PG.60-61

**CRAWL SPACE SUPPLIES**

PG.62-63

**INSULATION ACCESSORIES**

PG.64-65

**STILTS**

PG.66

**SCHEMATICS**

PG.67-69

**INDEX**

PG.70-71



## DUROVENT®

### (A) DUROVENT®

The **Number ONE** selling vent in the industry! The polystyrene material provides a lightweight water resistant air channel. Ideal for high volume new construction or lower cost re-insulation.

- Economical way to meet energy code requirements for air flow
- Multiple lengths and perforated center line to fit all applications
- Wide nailing flange and center strut allows for easy installation

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
<b>A</b>	<b>DV2200</b>	Durovent – 22" x 48"	50/bundle, 1,000/pallet	1,000
	<b>UDV2248</b>	Durovent w/UPC code – 22" x 48"	70/carton, 840/pallet	70
	<b>DV2272</b>	Durovent – 22" x 72"	50/bundle, 1,000/pallet	1,000

NOTE: Product color may differ by shipping location.

A

## proVent®

### (B-C) PROVENT®

Ideal for premium construction and for difficult applications like re-insulation, proVent may be installed prior to the soffit panel installation without fear of blow-out.

- Made with Pro Grade tear-resistant high-impact polystyrene
- Rigid vent construction eliminates breakage during re-insulation
- Full joist coverage for maximum air flow

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
<b>B</b>	<b>PV1148B</b>	proVent – 11" x 48"	3,000/bulk pallet	3,000
	<b>UPV1448050</b>	proVent w/UPC Code – 14" x 48"	50/carton, 1,500/pallet	50
	<b>PV1448B</b>	proVent – 14" x 48"	2,250/bulk pallet	2,250
	<b>UPV2248050</b>	proVent w/UPC code – 22" x 48"	50/carton, 1,000/pallet	50
<b>C</b>	<b>PV2248B</b>	proVent – 22" x 48"	1,500/bulk pallet	1,500

B

C

### (D) WINDBLOCK®


Provides the best moisture and air infiltration seal between the rafter vent and wall top plate. Works with Durovent and proVent to provide a moisture impervious vent and block system.

- **Scored for 16" and 24" O.C.**
- Install with rafter vents to maximize attic ventilation performance
- Secures vent in place thus eliminating blow-out during construction
- Blocks moisture from exterior and acts as an insulation stop
- Meets energy code requirements for air infiltration
- Provides a moisture and air infiltration seal between the rafter vent and top of the wall
- Prevents wind driven moisture and cold air infiltration between the rafter vent and the top of the wall
- Reduces energy loss at the attic perimeter
- Effective for use in new and retrofit applications
- Constructed of waterproof and durable polyboard

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
<b>D</b>	<b>WB2000</b>	Windblock w/UPC code	200/carton	200

PATENT PENDING  
**WINDBLOCK®**  
RAFTER AIR INFILTRATION BLOCK®

D

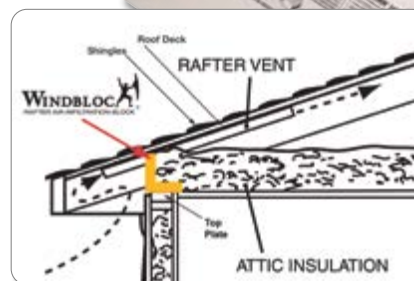



# DUROVENT<sup>®</sup> BAFFLE

## (A) DUROVENT BAFFLE<sup>®</sup>

The most economical way to ventilate your roof and block out the wind and rain! A water resistant baffle is incorporated into the **Number ONE** selling vent in the industry allowing for a one-step rafter vent and baffle installation.

- One-step installation
- Easy positioning and stapling
- Allows for wide range of heel heights

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
<b>A</b>	<b>DVB152346</b>	Durovent Baffle – 23.5" x 46"	50/bundle, 1,000/pallet	1,000
	<b>UDVB152346</b>	Durovent Baffle – 23.5" x 46" w/UPC code	70/carton, 840/pallet	70




# proVent<sup>®</sup> BAFFLE & XTENSION

## (B-C) PROVENT<sup>®</sup> BAFFLE & XTENSION


**NEW AND IMPROVED DESIGN** brings you the most versatile Baffle and Xtension for the insulation professional! The proVent<sup>®</sup> Baffle creates a channel through the insulation and blocks the air at the top plate, allowing insulation coverage at the plate and preventing wind-wash.

- Withstands heat and pressure of spray foam
- Versatile design adapts to varying heel heights
- Attaches to the truss, as well as the roof deck
- Will not absorb moisture or grow mold
- Made from high-impact polystyrene
- Spans the entire width of the bay – 16" or 24" O.C.

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
<b>B</b>	<b>PVB1548V2</b>	proVent Baffle – 15" x 48"	50/bundle, 1,500/pallet	50
	<b>UPVB2348V2</b>	proVent Baffle – 23" x 48" w/UPC code	50/carton, 1,000/pallet	50
	<b>PVB2348V2</b>	proVent Baffle – 23" x 48"	50/bundle, 1,200/pallet	50
<b>C</b>	<b>PVB1548EXT</b>	proVent Xtension – 15" x 48"	50/bundle, 1,500/pallet	50
	<b>PVB2348EXT</b>	proVent Xtension – 23" x 48"	50/bundle, 1,200/pallet	50

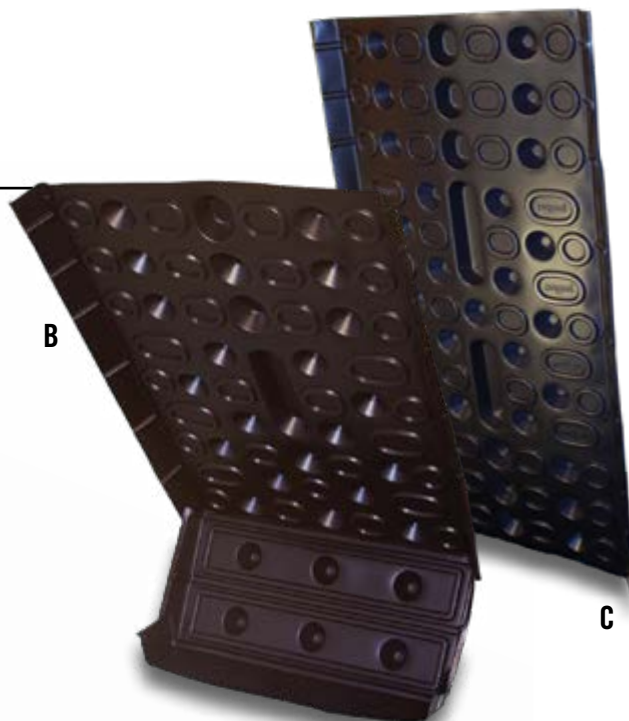

HOW A STATIC ATTIC VENTILATION SYSTEM WORKS

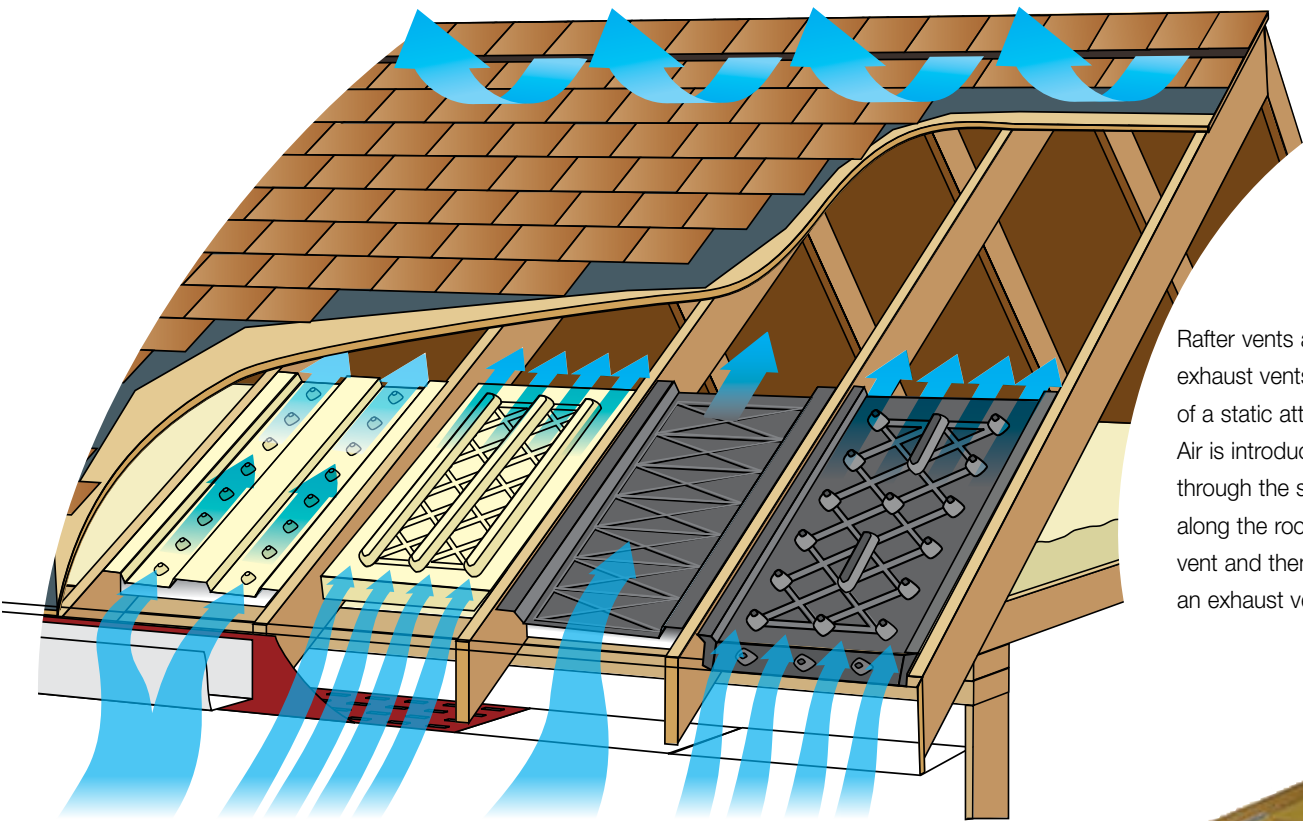

Rafter vents along with soffit and exhaust vents are the components of a static attic ventilation system. Air is introduced into the system through the soffit vents, channeled along the roof deck through a rafter vent and then is expelled through an exhaust vent.


(A) THE SHOOT™

The Shoot™ is a patented, effective way to insulate open framed areas in new construction applications of residential and commercial buildings, as well as room additions and remodeling projects. The Shoot™ has been researched and developed to be the perfect tool for the spray foam industry, spray-on systems and blow-in blanket systems. It is 6' in length and manufactured to fit 16" and 24" O.C. openings. With several scored edges, it can also fit odd sized openings.

KEY	SKU	DESCRIPTION	PACKAGING	MIN QTY
A	SH016BD	The Shoot, 16" x 72"	50/Bundle 500/Pallet	50
	SH024BD	The Shoot, 24" x 72"	50/Bundle 500/Pallet	50



A

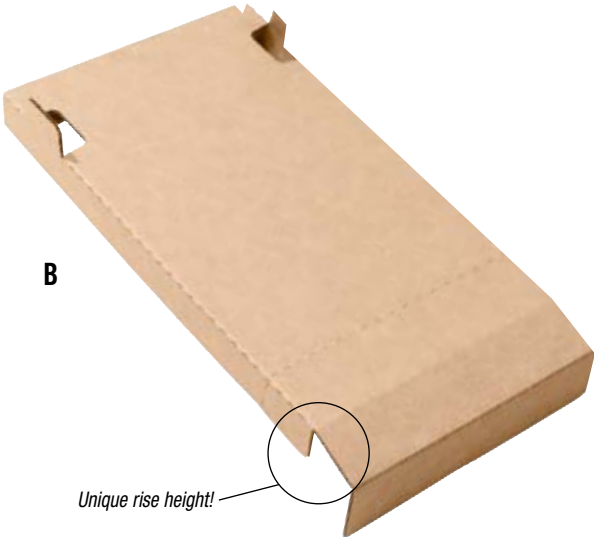

B

(B) CARDBOARD BAFFLES

Cardboard provides an economical vent that is easily installed. The baffle is incorporated into the vent providing a wind barrier to the exterior and an interior block for blowing in attic insulation. Flexible material for installing on all joist sizes.

- Vent incorporates a 6-9" tail that provides a full cavity block
- Stores flat and is easy to transport and handle

KEY	SKU	DESCRIPTION	OC	FLUE LGTH	PACKAGING	MIN QTY
B	BAFCOM16242317	Cardboard Baffle, 16" & 24" x 23	16"/24"	17"	50/bdl, 1200/pal	50
	CB1623	Cardboard Baffle, 16" x 29"	16"	23"	50/bdl, 1200/pal	50
	CB2423	Cardboard Baffle, 24" x 29"	24"	23"	50/bdl, 1000/pal	50
	CB2433	Cardboard Baffle, 24" x 39"	24"	33"	25/bdl, 600/pal	25
	CB2444	Cardboard Baffle, 16"/24" x 50"	16"/24"	44"	25/bdl, 600/pal	25
	CB2444MC2	Cardboard Baffle, 16"/24" x 50" Michelman Coated - 2 Sides	16"/24"	44"	25/bdl, 700/pal	25

# VersiFoam®



A



B

FOAM

## (A-B) VERSIFOAM®

VersiFoam® is a portable and disposable low-pressure spray foam insulation system. It is ideal for insulating, air sealing, sound dampening, condensation control, caulking, and void filling. VersiFoam® applies to commercial and residential construction, plant and facility maintenance, HVAC equipment, roofing repair, marine flotation and insulation, pool and spa insulation, stage/film props, special effects, insulation used within trucks, trailers, buses, RV's, and much more.

- Two-component closed cell spray foam kits
- Patented U-Control dispensing gun provides complete control over how much foam is dispensed
- Excellent air seal
- High R-value per inch
- Energy efficient
- Portable and disposable
- Tack-free to touch in 30-40 seconds

KEY	SKU	DESCRIPTION	MIN QTY	KITS/ PALLET
A	VF200C1HFO	VersiFoam, PU Foam, HFO, 2-Comp, 200 bd ft, Class 1	1	30
	VF200HFO	VersiFoam, PU Foam, HFO, 2-Comp, 200 bd ft,	1	30
B	VF600HFO	VersiFoam, PU Foam, HFO, 2-Comp, 600 bd ft	1	12
	VF600C1HFO	VersiFoam, PU Foam, HFO, 2-Comp, 600 bd ft, Class 1 (A)	1	12
	VF60030HFO	VersiFoam, PU Foam, HFO, 30' Hose, 2-Comp, 600 bd ft	1	12

**Kit Includes:** U-Control dispensing gun, two hoses, 10 mixing nozzles, 3 fan tips, 1 pair of nitrile gloves, 1 packet of petroleum jelly, 1 wrench.

## (C-D) VERSIFOAM® REPLACEMENT NOZZLES AND FAN TIPS


VersiFoam® offers replacement nozzles and fan tips to replace ones that have either been lost or broken.

KEY	SKU	DESCRIPTION	MIN QTY
C	AN0Z-EXT	VersiFoam Nozzle for All Kits	1
D	AFAN	VersiFoam Fan Tip Spray Nozzle Attachment for ANOZ-EXT, Fan-Shaped Pattern	1

## (E) VERSIFOAM® REPLACEMENT HOSES

VersiFoam® offers replacement hoses for all of their two-component foam kits. Assembly kits include two hoses and spray gun.

KEY	SKU	DESCRIPTION	MIN QTY
E	G10C-EXT	10' Gun/Hose Assembly for 200 bd ft Kits	1
	G15C-EXT	15' Gun/Hose Assembly for 600 bd ft Kits	1
	G30C-EXT	30' Gun/Hose Assembly for 600 bd ft Kits	1

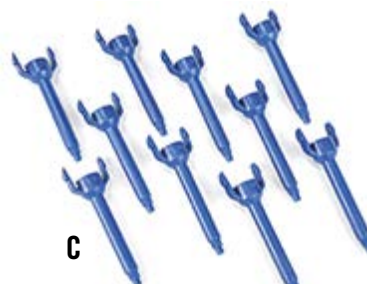

C



D



E



# SOUDAL FOAM & ACCESSORIES

## (A) SOUDAL WINDOW & DOOR GUN FOAM

Low-pressure formula eliminates windows and doors from bowing. Flame spread 15 and smoke developed 35. UL classified. Soudal Window & Door Foam meets AAMA (American Architectural Manufacturers Association) test specifications for low-pressure window and door sealant foams (AAMA 812-04).

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
A	116889	Soudal Window/Door Foam—24oz Can	12	54	1cs

## (B) SOUDAL FIREBLOCK GUN FOAM

Soudal Fireblock gun foam is a one-component, self expanding, ready to use, fire block, polyurethane orange-colored foam. It contains CFC-free propellants, which are completely harmless to the ozone layer. See ICC-ES Report #ESR-3118.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
B	120919	Soudal Fireblock Foam—24oz Can	12	54	1cs

## (C) SOUDAL ALL SEASON GUN FOAM

Soudal All Season Gun Foam is a "top of the line," one-component moisture-curing polyurethane foam developed especially to perform under difficult freezing temperature conditions or in hot conditions where traditional PU foams fail to extrude and cure. The foam will extrude at ambient temperatures as low as -13°F and as high as 120°F with a can temperature of minimum 41°F and maximum 95°F respectively. Cans should be stored at temperatures between 41° and 77°F. AAMA Compliant.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
C	455800	Soudal All-Season Gun Foam—24oz Can	12	54	1cs

## (D) SOUDAL SOUDAFOAM FLEX GUN FOAM

Soudal Soudafoam Flex is a one-component, moisture curing polyurethane foam developed to be flexible with minimal pressure and unique elastic recovery. Foam extrudes and cures in extreme temperatures from -13°F to 120°F with can temperatures between 41°F and 95°F and will not bend or bow window and door frames.


KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
D	457800	Soudafoam Flex, PU Can Foam—24oz Can	12	54	1cs

## (E-H) GUNS FOR SOUDAL FOAM

These guns are recommended for use with Soudal foam products.

KEY	SKU	DESCRIPTION	MIN QTY
E	122129	Soudal 24" Long Barrel Gun	1
F	FSG61060	Soudal/Boss Applicator Gun, 39" Barrel	1
G	103266	Soudal Designer Gun	1
H	109953	Soudal Compact Gun	1

# SOUDAL

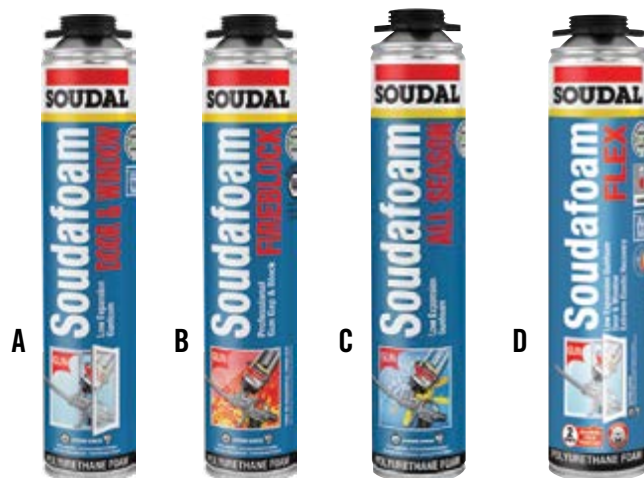

## (I) BOSS 81324 FIRESTOP EXPANDING FOAM

A true firestopping foam that is UL Classified and has passed the strict UL 1479 and ASTM E-814 tests. UL systems for cables, conduit and metallic pipes available. Prevents spread of fire, smoke and toxic gases up to a 2-hour fire rating. Ideal for use in hotels, prisons, hospitals, condominiums, single and multi-family homes.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
I	FBB81324	Boss 81324 Expanding Firestop Foam	12	80	1cs*

\*Drop shipped minimum only required.

## (J) SOUDAL CLEANER FOR FOAM GUNS


Environmentally safe agent specially formulated to dissolve non-cured and fresh polyurethane foams from can valves, dispensing equipment, foam guns and clothing. Contains no CFC's.

KEY	SKU	DESCRIPTION	MIN QTY
J	113433	Soudal Cleaner—12oz Can	1 CAN

## (K) SOUDAL FOAM GUN REPLACEMENT TIPS

Replaceable plastic extension tips for the Soudal Compact Gun (109953). Each tip is 3" long with a diameter of 3/16". Soudal foam gun tips allow the installer to get into tight areas as well as protect the tip of the gun, extending the overall life of the gun.

KEY	SKU	DESCRIPTION	MIN QTY
K	112371	PU Foam, Plastic Extension Tip Straw, Pack of 25	1

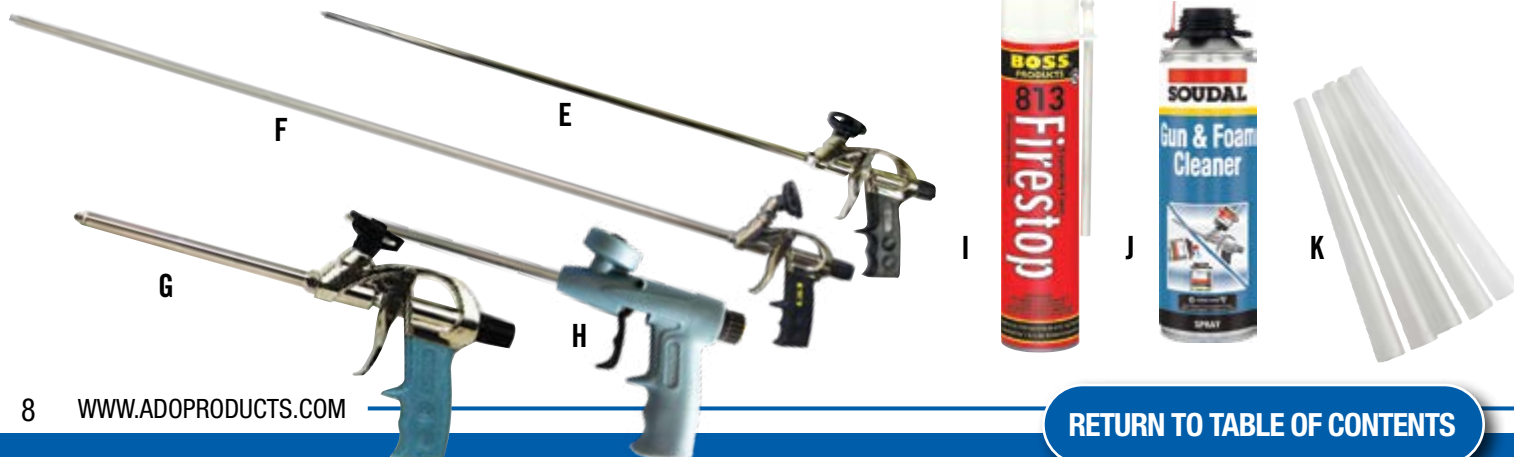

# SOUDAFOAM MAXTWO HFO

1,000 TIMES LOWER IMPACT ON GLOBAL WARMING VS HFC

Soudafoam MAXTWO HFO is high-quality two-component polyurethane spray foam for filling and sealing in professional and industrial applications. It is supplied in two portable, disposable, and pressurized cylinders requiring no external power source, no extra pressure, and no pumps. The patent-pending dispensing gun is equipped with specially developed nozzles, assuring a high-quality foam is produced.

## FEATURES

- Same performance as other spray foam products
- Density of 1.75 lbs./ft
- Aged R-value of 6.2 per inch reducing heating and cooling costs
- 12-month shelf life
- Patent-pending mix nozzle reduces the potential for back-flow minimizes the risk of clogging during the application.
- No VOCs, non-flammable, <1 GWP, and ODP of 0
- Great for acoustic insulation
- Cures in minutes with no shrinkage or expansion after curing
- Excellent adhesion to a variety of surfaces
- Disposable canisters that require no external power source

## WHERE TO USE

- Sealing insulation board joints
- Crawlspace insulation
- Insulating and sealing rim joists
- Residential wall insulation
- Air sealing attic and penetrations
- Sealing the roof/wall juncture
- Repair of high pressure sprayed walls and non-load bearing floors

SKU	DESCRIPTION	MIN QTY	KITS/ PALLET
<b>SOUDAL152936</b>	SOUDAFOAM MAXTWO HFO, 2-Part, Low GWP Foam Kit, 200 bd ft, 15' Hose	1	16
<b>SOUDAL165773</b>	SOUDAFOAM MAXTWO HFO, 2-Part, Low GWP Foam Kit, 600 bd ft, 15' Hose	1	12
<b>SOUDAL166879</b>	SOUDAFOAM MAXTWO HFO FR, 2-Part, Low GWP Foam Kit, Compressed Gas 2.2, UN3500 UOM, 600 bd ft, 30' Hose	1	12

### Kit Includes:

2-Comp HFO Foam, Dispensing Gun, Hoses, 12 Nozzles, Gun Lubricant, Wrench, & Instructions

## SOUDAFOAM MAX TWO FOAM ACCESSORIES

SKU	DESCRIPTION	MIN QTY
<b>SOUDAL154626</b>	SOUDAFOAM Cone Nozzles, Medium Output, 25/pk	1PK
<b>SOUDAL154627</b>	SOUDAFOAM Fan Nozzles, Medium Output, 25/pk	1PK
<b>SOUDAL154786</b>	SOUDAFOAM Gun Hose Assembly, 15'	1
<b>SOUDAL154787</b>	SOUDAFOAM Gun Hose Assembly, 30'	1





## (A) HANDIFOAM® EXTREME POLYURETHANE FOAM

Formulated to work in extreme climates where ambient moisture/humidity is not always present. Tack-free within 10 minutes and meets ASTM E-84 Class 1 for caulk and sealants. Handi-Foam® Extreme is the perfect choice for sealing needs in extreme climates.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
<b>A</b>	<b>P30120</b>	HandiFoam Extreme Gun Foam–24oz	12	48	1cs

## (B) HANDIFOAM® FIREBLOCK POLYURETHANE FOAM

Designed to seal, fill, bond and stop air infiltration. HandiFoam is more effective than traditional fireblock materials at blocking flames and smoke. Recognizable orange color allowing inspectors to easily identify the use of an approved fireblock product. Passes ICC-ES evaluation for use as a fireblock.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
<b>B</b>	<b>P30181</b>	HandiFoam Fireblock–24oz Can	12	48	1cs

## (C) HANDIFOAM® WINDOW AND DOOR POLYURETHANE FOAM

Multiple purpose, UL classified, one-component polyurethane foam designed specifically for window and door installation and retro-fit applications. Low-pressure formulation will not bow windows or door frames. Meets AAMA (American Architectural Manufacturers Association) test specifications for low-pressure window and door sealant foams.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
<b>C</b>	<b>P30272</b>	HandiFoam Window & Door Foam–24oz	12	48	1cs

## (D) HANDIFOAM® BLACK SEALANT

One-component polyurethane foam (OCF) sealant specifically designed black in color, making it ideal for applications where product appearance may be a factor. HandiFoam Black Sealant utilizes a (HC) propellant. May be used to fill gaps and cracks in pond and waterfall design, landscaping, RV undercarriages, crack and hole repair in trees, as well as to seal gaps and penetrations in the building envelope. Fish and plant safe.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
<b>D</b>	<b>P30053</b>	HandiFoam Black Sealant–12oz	12	75	1cs

## (E) HANDIFOAM® CLEANER

Handi-Cleaner is a multi-purpose cleaning agent used to dissolve uncured or fresh polyurethane foam and adhesives, formulated without the use of any ozone-depleting materials.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/ PALLET	MIN QTY
<b>E</b>	<b>P10083</b>	HandiFoam Cleaner–12oz Can	12	75	1cn

## (F-I) APPLICATOR GUNS FOR HANDIFOAM®

Use with HandiFoam and Fast Foam one-component foam products.

- Reusable
- Adjustable output
- Metal barrel


KEY	SKU	DESCRIPTION	MIN QTY
<b>F</b>	<b>FSG61033</b>	Foam Gun, Handi-Tool, HT330	1
<b>G</b>	<b>F61055</b>	Foam Gun, Handi-Tool, HT550	1
<b>H</b>	<b>FOAMGS07</b>	Foam Gun, Steel Handi-Tool, HT770	1
<b>I</b>	<b>F61020</b>	Foam Gun, 22" Steel Handi-Tool	1

FEATURES	HT330	HT550	HT770
<b>BASKET</b>	Teflon Coated	Teflon Coated	Teflon Coated
<b>SEALING BALL</b>	Steel	Teflon	Teflon
<b>NEEDLE SEALING</b>	Steel	Teflon	Teflon
<b>BARREL</b>	Stainless	Stainless	Teflon Coated Aluminum
<b>OUTLET NOZZLE</b>	Barbed Copper	Barbed Copper	Teflon Coated Barbed Copper
<b>BODY</b>	Plastic	Chrome Plated Aluminum	Teflon Coated Aluminum
<b>TRIGGER</b>	Aluminum	Aluminum	Teflon Coated Steel


## (J) EXTENSION TIPS

Fits Handi-Tool gun models FSG61033 and F61055.

KEY	SKU	DESCRIPTION	MIN QTY
<b>J</b>	<b>FSGPTE</b>	Plastic Extension Tip–5 tips/pack	1pk

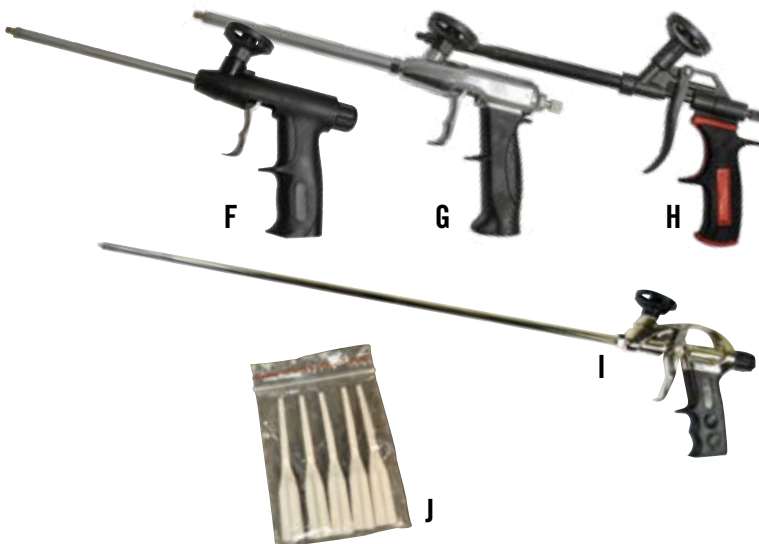



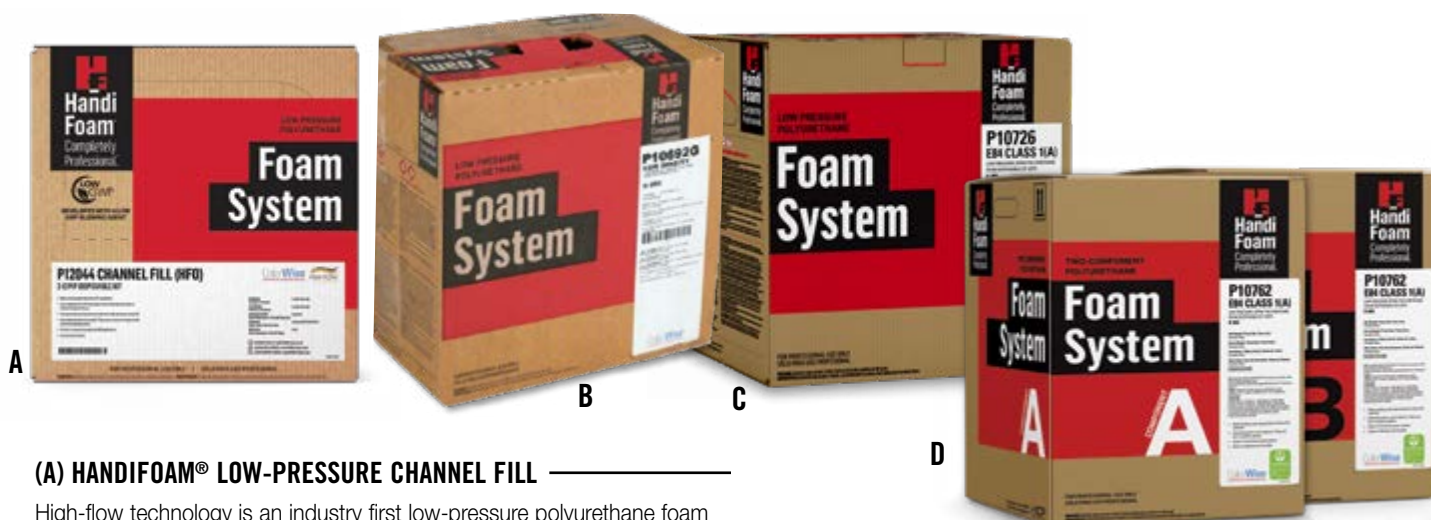

### (A) HANDIFOAM® LOW-PRESSURE CHANNEL FILL

High-flow technology is an industry first low-pressure polyurethane foam category that takes traditional pour-in-place polyurethane foam and adds the ability to completely fill difficult and intricate voids, making impossible applications possible. Handi Flow Channel Fill is a stable, chemically-cured foam that will not settle, shrink or post-expand over time—providing quality assurance that the cavity is and will remain completely filled.

KEY SKU	DESCRIPTION	KITS/ PALLET	MIN QTY
<b>A HP12044</b>	HandiFoam Channel Fill, HFO – 12 cu ft.	26	1KT
<b>P12046</b>	HandiFoam Channel Fill, HFO – 35 cu ft.	9	1KT

### (B) HANDIFOAM® LOW DENSITY LOW-PRESSURE SPRAY POLYURETHANE FOAM

HandiFoam® Low Density low-pressure, spray polyurethane foam is an open cell, chemically-cured, two-component system used to fill and insulate large voids and surfaces. HandiFoam® Low Density is great for sound deadening and reducing noise volume. Ideal for patch and repair or touch-up work of currently insulated buildings where a low density foam is installed.

KEY SKU	DESCRIPTION	KITS/ PALLET	MIN QTY
<b>B FSH250</b>	II-250 HandiFoam Low Density Spray Foam	26	1KT
<b>P10694</b>	II-450 HandiFoam Low Density Spray Foam	26	1KT
<b>P10770</b>	II-1350 HandiFoam Low Density Spray Foam	9*	1KT

\*18 A & B boxes total

### (C-D) HANDIFOAM® CLASS 1 SPRAY POLYURETHANE FOAM

HandiFoam® E84 Class 1 Spray Foam is a low-pressure foam system that utilizes a non-flammable blowing agent. HandiFoam E84 Class 1 Spray Foam has been specifically formulated for flame retardancy and conforms to the requirements of ASTM E84 as a "Class 1(A)" system (flame spread of 25 or less, smoke development of 450 or less). The foam helps to lower heating and cooling costs by drastically reducing energy consumption.

KEY SKU	DESCRIPTION	KITS/ PALLET	MIN QTY
<b>C P12055</b>	PU Foam, HFO Blend, 2-Comp, HandiFoam, 205 bd ft, Class 1	26	1KT
<b>D P12056</b>	PU Foam, HFO Blend, 2-Comp, HandiFoam, 605 bd ft, Class 1	9	1KT



### (E-F) TANK FOAM SEALANT

Multiple purpose, UL classified one-component polyurethane foam designed for the professional user. Dispensed through a flexible hose with a valve controlled dispensing nozzle. Optimal application temperature is between 65-100° F (18-38° C), and may be used between 40-115° F (5-46° C). Dries tack-free within 10 minutes or less depending on moisture and temperature conditions. Cuttable within one hour and fully cures in 12-24 hours. Flame spread 25 and smoke developed 50. UL classified file #R13919 Caulking and Sealants. ASTM E-84 (12.5%).


KEY SKU	DESCRIPTION	KITS/ PALLET	MIN QTY
<b>E FSP11042</b>	Foam Tank HandiFoam–16lb Tank Kit	40	1KT
<b>F F62180</b>	Single Component Tank Foam Hose Kit (Hose, Valve, Nozzle)	N/A	1KT

## HANDIFOAM® ACCESSORIES

### (G-H) 2-COMPONENT FOAM ACCESSORIES

KEY SKU	DESCRIPTION	MIN QTY
<b>G F66116</b>	2-Comp HandiFoam, Fan Tip Temperature Warning Nozzle	1
<b>H F66210</b>	2-Comp HandiFoam Gun & 15' Hose	1

"When the Nozzle  
**TURNS BLUE**  
Stop Your Crew."™

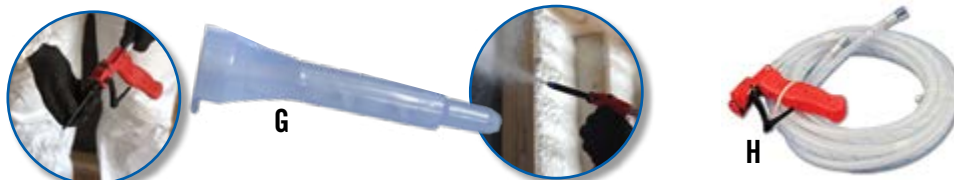



## (A) GRACO REACTOR 3 E-30 PROPORTIONER PACKAGE

The Graco Reactor 3 gives contractors complete control from drum to gun. Its high-quality systems enable you to spray quickly and consistently, which means fewer delays and less rework. Data-driven tools and analytics, you will be able to spray with unmatched precision job after job and day after day.

- ISO lube pump
- Large new touchscreen interface with intuitive operation and navigation
- Independent hose control for customizable temperatures and improved pressure balancing
- Advanced electric design improves performance and longevity
- Reduced footprint provides additional room in your rig

KEY	DESCRIPTION	MIN QTY
A	Reactor 3 E-30 Proportioner Package, Graco	1

## B - PROBLER P2




## C - FUSION PC



## D - FUSION CS



## E - FUSION AP



## F - FUSION FX



## (D) GRACO FUSION CS SPRAYER

Flexible for foam and polyurea applications, the Fusion ClearShot is the first ever liquid-purge gun. It utilizes a disposable ClearShot cartridge to clear material and keep the mix chamber clear, saving you valuable time each day you spray.

KEY	SKU	DESCRIPTION	MIN QTY
D	GRCS01RD	Graco, Complete CS Spray Gun	1

## (E) GRACO FUSION AP SPRAYER

The Fusion Air Purge is Graco's most popular plural-component gun for both polyurethane foam and polyurea applications. Its exceedingly simple air-blast tip technology ensures less maintenance and minimal downtime.

KEY	SKU	DESCRIPTION	MIN QTY
E	GR246101	Graco, Complete AP Spray Gun, Rnd. -01	1

## (F) GRACO FUSION FX SPRAYER

The industry's smallest, lightest, best balanced gun ever built. Featuring three mixing chambers and all new spray technology that will change the way you spray. Built for spray foam and polyurea applications.

KEY	SKU	DESCRIPTION	MIN QTY
F	GRFX9001	Fusion FX Spray Gun, 3 Mix Chambers: .037, .042, .047	1

## (B) GRACO PROBLER P2 SPRAYER

The Probler P2 Gun is lightweight and easy to maneuver - even in difficult spraying positions. Its double piston design provides more than 300lbs of triggering force - much more than a smaller piston diameter. The Probler P2 reduces maintenance, increases spraying uptime and is easy to use. For high output spray polyurethane foam and polyurea applications.

KEY	SKU	DESCRIPTION	MIN QTY
B	GRGCP2R1	Probler P2, Complete Spray Gun, 01 Mix Chamber Kit	1

## (C) GRACO FUSION PC SPRAYER

The revolutionary Fusion ProConnect gun is the only gun available that features an easy-to-use disposable replacement cartridge that enables contractors to complete a perfect rebuild in seconds—maximizing uptime and minimizing spare parts inventory.

KEY	SKU	DESCRIPTION	MIN QTY
C	GR25P588	Graco, Complete PC Spray Gun, Rnd. -01	1
	GR25P589	Graco, Complete PC Spray Gun, Rnd. -02	1







## (A) ST-1 AIR-PURGE GUN

Smoother patterns, more uptime, and better ergonomics set the ST-1 in front of the pack when it comes to spray foam guns. The ST-1 is specifically designed for a consistent spray pattern for faster application. An integrated check valve prevents crossovers or fluid leaks. The Ultra Onyx™ coating improved durability and makes clean-up a breeze.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>CA336424</b>	Complete Gun Spares Kit	1
	<b>CA336500</b>	Bare Gun B MC 01 MT	1
	<b>CA336501</b>	Bare Gun C MC 15 MT	1
	<b>CA336502</b>	Bare Gun D MC 01 MT	1
	<b>CA336507</b>	Gun B MC 01 MT w/ Accessory Kit	1
	<b>CA336508</b>	Gun C MC 15 MT w/ Accessory Kit	1
	<b>CA336509</b>	Gun D MC 02 MT w/ Accessory Kit	1



## (B) IS30 INTELLISPRAY PROPORTIONER

The next generation of spray foam systems. The IS30 will ensure each job is done with the proper ratios while keeping your operation up and running faster and more consistently. The precision of the IS30 can increase your yield by 5%-15%. Additionally, with 15min warm-up, higher outputs, and less downtime you will save up to 1.5hrs per day!

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>CA348003</b>	IS30 6-Zone Proportioner	1

## (C) QUICK HEAT HOSE SYSTEM

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>CA340972</b>	3/8" 20' Smart End w/ Optical	1
	<b>CA340974</b>	3/8" 150' Mid-Zone - 6 Zone System	1
	<b>CA340978</b>	3/8" 40' Smart End w/ Optical	1

## CONSISTENT SPRAY PATTERNS!





# SPRAY FOAM ACCESSORIES

## GRACO PARTS AND REPAIR KITS

Contact us for easy to use drawings and parts lists. Our staff will help you find the parts you need for Graco guns, tips, hoses, transfer pumps and more.



## (A-B) GRACO HEATED HOSES

Graco's heated hoses are designed specifically for use with Reactor Equipment. Hoses are a key component to the total system, making it important to achieve accurate and uniform heating for the best application possible.

- Provides 10-times\* the flex life compared to previous flat copper heating element
- Backwards compatible with existing Reactor heated hoses

KEY	SKU	DESCRIPTION	MIN QTY
A	GR24Y240	Heated Hose, 50' – Xtreme Wrap, RTD Cable	1
B	GR256549	Heated Hose, 50' – Scuff Guard, No Cable	1
	GR246678	Heated Hose, 50' – Scuff Guard, FTS Cable	1
	GR246679	Heated Hose, HTD, 35000SI, 3/8 w/ Scuff Guard	1

\* Testing based on 1/4 in. 2000 psi (6.35 mm and 138 bar) heated hose

## (C) SIDEWINDER SLEEVE AND ACCESSORIES

Your spray foam hose takes a lot of abuse, but installing the new SIDEWINDER SLEEVE is the “go-to” solution for protection from heavy abrasion, cold & wet weather, and other extreme environments. Sidewinder SPF Sleeve incorporates the most advanced insulation and a brasion-resistant materials to enhance sprayability and provide higher yields when pushing foam. Available for your hose and whip in both insulated and non-insulated products.

KEY	SKU	DESCRIPTION	MIN QTY
C	SW-2175	Insulated Sleeve – 50' w/ Radiant Liner & End Straps	1
	SW-2176	Insulated Coupler Guard – 3' w/ Radiant Liner & End Straps	1
	SW2413	Whip Hose Cover – 7' w/ Radiant Liner & Straps	1
	SW2895	Kit, 210' SPF Rig – Non-Insulated	1

## (D) DESICCANT CARTRIDGE

This disposable Desiccant Cartridge dries displacement air entering storage drums to -100° F dewpoint, preventing water vapor's condensation and resulting contamination. The indicator window turns from blue to pink when the cartridge is exhausted. When used with the drum adapter, these cartridges provide economical and versatile means for preventing moisture contamination in drums, totes, and small tanks.

KEY	SKU	DESCRIPTION	MIN QTY
D	DR-40451	Desiccant Cartridge	1

## (E) POWERBLANKET DRUM HEATER WRAPS

Drum heaters are one of the most popular lines of Powerblanket products. The innovative design has changed the conventional method of heating materials by providing targeted and evenly distributed heat to the surface of the drum, thus eliminating hot and cold spots. Works on steel and poly drums.

- Full-Coverage—provides an insulated, full-wrap design
- Protect—preserve expensive materials without overheating or burning

KEY	SKU	DESCRIPTION	MIN QTY
	PBL55F	Powerblanket Light Duty, 55gal Drum Wrap	1
E	BH55RR	Powerblanket Industrial Duty, 55gal Drum Wrap Preset Internal Thermostat @ 100°F	1
	BH55-PRO	Powerblanket Industrial Duty, 55gal Drum Wrap Preset Internal Thermostat @ 145°F	1

\* Product temperatures may vary depending on boundary conditions.



Cylinder wrap sold separately.

## (A) 2-GALLON PAIL & SPRAY FOAM CYLINDER WARMING WRAP –

Pail warmer will warm a two gallon can or a 200 Bd Ft foam kit cylinder. Made from heavy duty nylon CPAI 84 which creates a heat retaining flexible barrier. Insulated with closed cell polypropylene with an enclosed heating element. Plugs into a 120V AC or 12V DC inverter using a heavy duty industrial cord. Voltage: 120 VAC - 80 Watts.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>0609-PLW2</b>	Wrap – 2 Gal Warmer, 8" High x 29" Long	1

## (B) 5-GALLON SPRAY FOAM CYLINDER WARMING WRAP –

This pail warmer will warm a five gallon can or a 620 Bd Ft foam kit cylinder. It is made from heavy duty nylon CPAI 84 which creates a heat retaining flexible barrier. It is insulated with closed cell polypropylene with an enclosed heating element. It plugs into a 120V AC or 12V DC inverter using a heavy duty industrial cord.

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>0609-PLWC</b>	Wrap – 5 Gal Warmer, 11.5" High x 41" Long	1

## (C) 25' FOAM HOSE WARMING WRAP –

To be used with 2-component kit hoses. Cylinder wrap is not included.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>0911HWS</b>	Warming Wrap – 25' Foam Hose	1

## (D) CURRY COMBS –

The curry combs come in a set, one 4" and one 5". These are great tools for scraping/planning 1/2 lb and 2 lb foam from studs as well as foam that is protruding beyond a finished surface.

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>MAC605</b>	Curry Combs, 4" and 5" Set	1PK

## (E) DENTAL PICKS –

Dental picks are a great way to clean your spray foam guns as well as your other foam equipment. Made of stainless steel.

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>TLMAC605</b>	Spray Foam Dental Picks, 6/pk	1PK

## (F) WALL SCRAPER –


The Wall Scraper offers more flexibility when it comes to removing an excess of 1/2 lb or 2 lb spray foam from wall studs and ceiling joists.

KEY	SKU	DESCRIPTION	MIN QTY
<b>F</b>	<b>TLMAC604</b>	Wall Scraper, 17"	1

## (G) FOAMZALLV18 – BATTERY OPERATED –

The FOAMZALLV18 Milwaukee® brand M18 FUEL™ SAWZALL® Reciprocating Saw is the fastest saw in its class, offering up to 2X more runtime, 30% faster cutting, and 5X longer tool life of competitive saws. POWERSTATE™ brushless motor provides cutting power that has only been associated with corded tools. The M18™ REDLITHIUM™ XC4.0 Extended Capacity Battery Pack delivers up to 2X runtime and provides more work per charge and more work over the life of the pack than competitive batteries. Comes with (1) M18 FUEL™ SAWZALL® Reciprocating Saw, (2) M18™ REDLITHIUM™ XC 4.0 Extended Capacity Battery Pack, M18™ & M12™ Multi-Voltage Charger and Carrying Case.

KEY	SKU	DESCRIPTION	MIN QTY
<b>FOAMZALL15</b>		Foamzall Foam Saw, 15amp Corded	1
<b>G</b>	<b>FOAMZALLV18</b>	Foamzall Foam Saw, Cordless	1
<b>FZBLADE24</b>		Foamzall Saw Blade, 24"	1
<b>FZBLADE</b>		Foamzall Saw Blade, 36"	1
<b>FZBLADE2LB</b>		Foamzall Saw Blade, for 2lb Foam, 30"	1

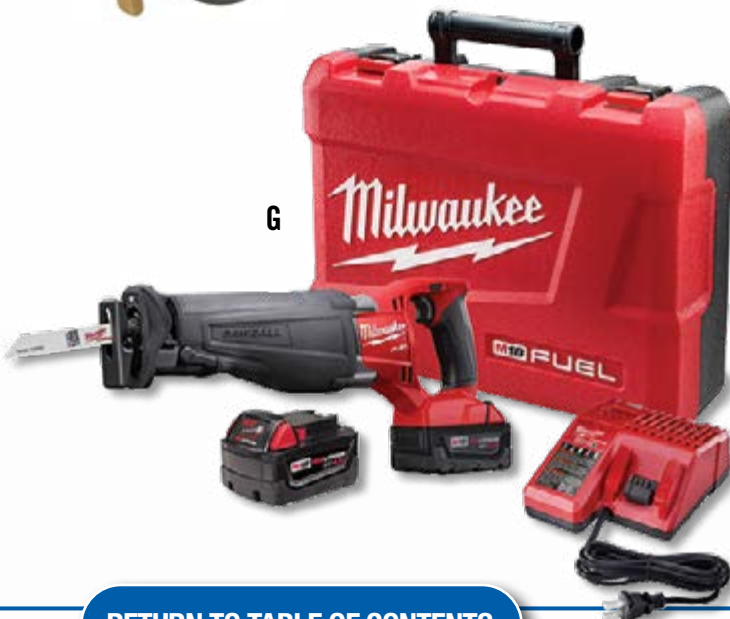

# SPRAY FOAM ACCESSORIES

## (A) SUPER SHEAR FOAM SAW

The Super Shear V3 foam saw has a 1-1/8 inch stroke. Longer stroke allows you to cut at a slower rpm (which reduces vibration) but still get excellent cutting speed. 11 amps.

- 1-1/8 inch stroke
- Absolutely maintenance free
- Stokes per minute: 0-2800
- Weight: 8.5 pounds
- Blade Mount: 2 screws
- Trim walls up to 10 feet tall

KEY	SKU	DESCRIPTION	MIN QTY
A	<b>SUPERSHEARV3</b>	Foam Saw, Super Shear V3, 11 Amp, Corded	1
	<b>CB530027</b>	Foam Saw Blade, Super Shear, Closed Cell, 18"	1
	<b>SSBLADE0</b>	Foam Saw Blade, Super Shear, Open Cell, 27"	1

## (B) CUTTER FORCE


Cutter Force Foam Removal Tool effectively removes open & closed cell foam efficiently with minimal discard waste. Works on 16"- 24" on-center construction. The scarfed foam is sized to allow for quick pick-up and no dust! *Note: The required drill attachment must be purchased separately.*

KEY	SKU	DESCRIPTION	MIN QTY
B	<b>BL0-75100-00</b>	Scarfed Tool for OC & CC SPF	1
	<b>BL0-75111-00</b>	Cutter Force Drill Attachment	1

## (C-E) FOAM SAW ISO KNIVES, BLADES AND HANDLES

Both the 36" and 18" ISO Knives are designed for 1/2 lb spray foam removal. Designed with high impact resistant handles specially shaped to reduce the risk of the user's hands accidentally sliding forward across the blade in the event of a sudden stop while cutting.


KEY	SKU	DESCRIPTION	MIN QTY
C	<b>MAC601</b>	Foam Saw, 36" ISO Knives, 3/pk	1PK
	<b>TLMAC601ABLADE</b>	Foam Saw Blade, 36" ISO Blades, 3/pk	1PK
D	<b>TLMAC601BHANDLE</b>	Foam Saw Handle, ISO Style, 7", Fits 36" & 18" Foam Saws	1
E	<b>TLMAC603</b>	Foam Saw, 18" ISO Knives, 3/pk	1PK
	<b>TLMAC603ABLADE</b>	Foam Saw Blade, 18" ISO Blades, 3/pk	1PK

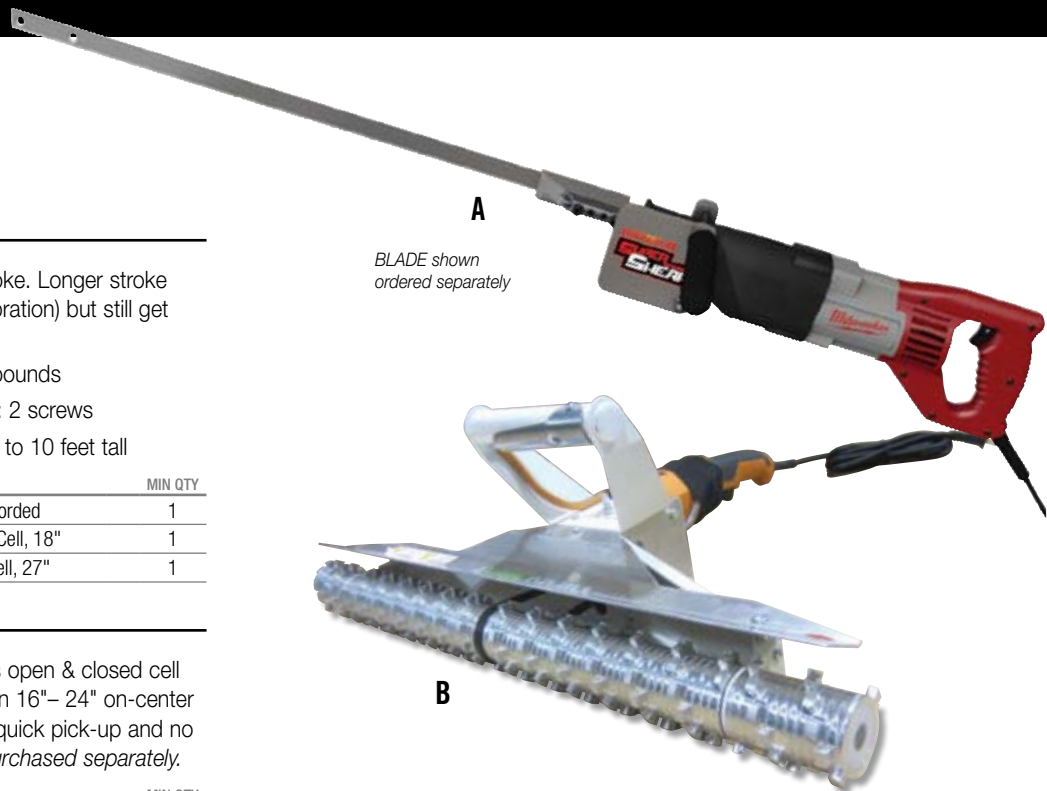

## (F-M) PIRANHA SPRAY FOAM FINISHING TOOLS

Gone are the days of finding random tools and re-purposing them to use in your spray foam business. The Piranha Tool line includes industry specific combination tools, scrapers, and scarfers that will make your spray foam finishing and clean-up a breeze.

KEY	SKU	DESCRIPTION	MIN QTY
F	<b>TL6PCKKIT</b>	6 Piece Kit	1
G	<b>TLK3N1</b>	3-in-1 Foamer's Knife	1
H	<b>TL7N1CLEAN</b>	7-in-1 Cleaning Tool	1
I	<b>TLSCARF</b>	Foam Scarfer	1
J	<b>TLISM</b>	Small Foam Scraper	1
K	<b>TLSL31</b>	31" Large Foam Scraper	1
L	<b>TLBRUSHKIT</b>	Replacement Brushes, 2 Pack	1
M	<b>TLPINVICE</b>	Replacement Pin Vices, 3 Pack	1

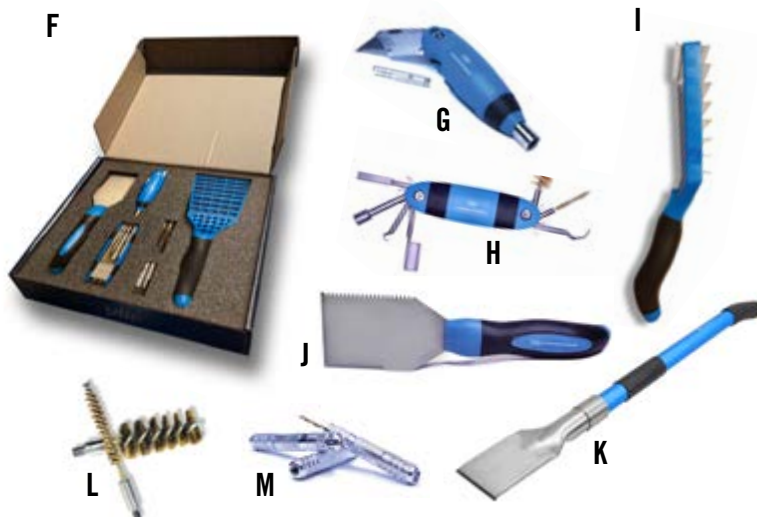





A

(A) VALUE-TOUCH®

Power-free latex gloves. 5 mil gloves with a beaded cuff offering excellent dexterity and sensitivity.

KEY	SKU	DESCRIPTION	MIN QTY
A	6593-20	Gloves, Latex, Powder-Free, 5mil, 100/Box – Size: L	1Bx



B

(B) NITRILE DERMA-MAX

Powder-free exam grade gloves. 8 mil with a 12" length for added protection. Latex free with a textured grip.

KEY	SKU	DESCRIPTION	MIN QTY
B	PSSAS6609-40	Gloves, Nitrile, Powder-Free, 8mil, 12" Length, 50/Box – Size: XL	1Bx



C

(C) HUSKY CONTRACTOR CLEAN-UP BAGS

HUSKY 42 Gallon Clean-up Bags are ideal for all your tough clean-up jobs. Featuring a tear and puncture-resistant design, it includes true tie flaps and 1-by-1 dispensing for easy use. 42-gallon capacity is strong enough for contractor, commercial or home use.

KEY	SKU	DESCRIPTION	MIN QTY
C	HCB423	Husky Contractor Clean-up Bags, 32.75 x 45.12", 3mil, 42 Gal, Black, 32 Bags/Box	1Bx



D

(D) SCOTT® RAGS IN A BOX

Designed for professionals doing hands-on work, these soft, absorbent, durable towels perform like a cloth. They're also low lint, making them ideal for thousands of projects. 10" x 12". Pop-up box. White.

KEY	SKU	DESCRIPTION	MIN QTY
D	S75260	Scott® Rags in a Box, 200 Towels/Box, 8 boxes/case	1Bx



E

(E) BARRICADE CAUTION TAPE

An economical disposable marking solution manufactured for exceptional durability and resistance to the elements.

KEY	SKU	DESCRIPTION	MIN QTY
E	TPC31000	2mil "Caution" Barricade Tape–3" x 1000', 8 rls/case	1RL

## (A) FIRESHELL® THERMAL BARRIER INTUMESCENT COATING

FIRESHELL (F10E) is a proprietary non-flammable, intumescent (expands up to 2000%) interior coating that provides oxygen starvation to fire. It is a non-toxic, water-based, drain safe, no fuming GREEN product. FIRESHELL passes full scale room corner over foam NFPA 286 and E84 class A certified. It is a water-based one-part coating system that comes white but can be tinted different colors. This coating can be latex or oil-based top-coated.

- For walls, foam, attics, crawl spaces
- Open cell or closed cell insulation foam
- Bio foams

### APPROVALS

- Meets NFPA 285 multi story fire resistance over spray foam for ACM aluminum/spray foam commercial wall assemblies
- The first coating to pass NFPA 286 over foam
- Water-based, 1-part, non-flammable, intumescent coating for interior use
- E84 CI 'A' verified
- Meets green standards and lead paint requirements
- Meets EPA certification for ultra low VOC coating

KEY	SKU	DESCRIPTION	PAILS/ PALLET	MIN QTY
<b>A</b>	<b>FIRESHELLF10E</b>	NFPA 286 Thermal Barrier, Intumescent Coating, 5 gal – White	36	1 PL
	<b>FIRESHELLF1EP-5G</b>	NFPA 286 Thermal Barrier, Intumescent Coating, 5 gal – Gray	36	1 PL

## (B-C) NO-BURN AND NO-BURN PLUS THB

No-Burn® Plus and No-Burn® Plus ThB are water-based thin film intumescent coatings when exposed to high temperatures and flame, intumesces creating a char-barrier protecting treated substrates from fire. Limits flame spread and smoke developed, providing intumescent protection when applied and where lapped or butted lumber and sheeting edges are joined together.

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>NOBURNPLUS-5G</b>	No-Burn Plus Intumescent Coating, Engineered Wood, Spray Foam Only, 5 gal – White	1
<b>C</b>	<b>NB-1501</b>	No-Burn Plus ThB Intumescent Coating, Spray Foam Only, 5 gal – Gray	1
	<b>NB-1500</b>	No-Burn Plus ThB Intumescent Coating, Spray Foam Only, 5 gal – White	1

## (D-E) DC315

DC315 is an intumescent coating for Spray Polyurethane Foam (SPF) and provides an alternative 15 or 20 minute thermal barrier. Tested and compliant in the USA by ICC-ES, and Canada by CCMC. DC315 is the most tested and approved alternative thermal barrier on the market today!

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>DC315-5G</b>	Intumescent Coating, 5 gal – Ice Gray	1
<b>E</b>	<b>717906348647-WHITE</b>	Intumescent Coating, 5 gal – White	1
	<b>840060700072</b>	Intumescent Coating, 5 gal – Black	1
	<b>DC315DRUM</b>	Intumescent Coating, 55 gal Drum – Ice Gray	1
	<b>DC315WHT-55G</b>	Intumescent Coating, 55 gal Drum – White	1





## (A-B) DYNASOLVE CU-6 URETHANE CLEANING SOLVENT

Recommended for both flushing and cleaning, especially in applications in which liquid isocyanates are present either prior to cleaning or will be introduced after cleaning (such as in a mixing tank). Non-chlorinated, non-flammable, non-carcinogenic, and non-ozone depleting. Replaces and improves on the performance of commodity solvents such as methylene chloride, acetone, methyl ethyl ketone (MEK), and 1,1,1-trichloroethane. Can be used for extended periods, tolerate high resin loadings, and will reduce disposal costs. It is also recyclable via vacuum distillation.

KEY	SKU	DESCRIPTION	MIN QTY
A	DYNASOLVECU6-1	Dynasolve Gun Cleaner/Solvent, Low VOC, 1 Gal	1
B	DYNASOLVECU6-5	Dynasolve Gun Cleaner/Solvent, Low VOC, 5 Gall	1



## (C) CHEM TREND INSULATION RELEASE

An effective barrier coat to keep overspray of PU foam insulation from adhering to items; spray equipment, tub and shower stalls and other non-porous surfaces. DO NOT apply to personal protective equipment.

KEY	SKU	DESCRIPTION	MIN QTY
C	CTSFS	Chem Trend Insulation Release, 10.25oz Aerosol Can	1



## (D) CHEM TREND SPRAY FOAM REMOVER

Spray/apply to remove foam in any overspray areas where foam is not needed or was not intended to be applied.

KEY	SKU	DESCRIPTION	MIN QTY
D	CTSFR	Chem Trend Spray Foam Remover, 1 Gal	1
	CTSFR-5G	Chem Trend Spray Foam Remover, 5 Gall	1

## (E-F) CHEM TREND SPRAY FOAM FLUSH PRODUCTS

Products are meant for cleaning/flushing of spray equipment and guns.

KEY	SKU	DESCRIPTION	MIN QTY
E	CTSFF41G	Chem Trend Spray Foam Flush 4, 1 Gal	1
F	CTSFF4-5G	Chem Trend Spray Foam Flush 4, 5 Gall	1



## (G) STONER URETHANE ANTI-STICK COATING E238

Apply E238 anti-stick coating onto surfaces to prevent spray foam from sticking to treated equipment, window frames, pipes, and masked off work areas. Allows for easy removal of overspray. E238 is a specially formulated, durable, thin, anti-stick coating that prohibits polyurethane and other adhesives from bonding to treated surfaces.

KEY	SKU	DESCRIPTION	CANS/CASE	MIN QTY
G	E238	Stoner Urethane Anti-Stick Coating, 12oz Can	12	1CN





## (A-B) TYVEK® COVERALL SUITS

Spun bonded olefin fabric made from high density polyethylene fibers that offer excellent protection and strength.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>TY125SWHLG002500</b>	Tyvek Suit - Non-Hooded, 25/cs	L	1cs
	<b>TY125SWHL002500</b>	Tyvek Suit - Non-Hooded, 25/cs	XL	1cs
	<b>TY125SWH2X002500</b>	Tyvek Suit - Non-Hooded, 25/cs	2XL	1cs
	<b>TY125SWH3X002500</b>	Tyvek Suit - Non-Hooded, 25/cs	3XL	1cs
	<b>TY125SWH5X002500</b>	Tyvek Suit - Non-Hooded, 25/cs	5XL	1cs
<b>B</b>	<b>PPCLTY127SWLG</b>	Tyvek Hooded Suit, 25/cs	L	1cs
	<b>1428-XL</b>	Tyvek Hooded Suit, 25/cs	XL	1cs
	<b>PPCLTY127SW2X</b>	Tyvek Hooded Suit, 25/cs	2XL	1cs
	<b>PPCLTY127SW3X</b>	Tyvek Hooded Suit, 25/cs	3XL	1cs
	<b>PPCLTY127S4X</b>	Tyvek Hooded Suit, 25/cs	4XL	1cs

Note: Please consult your Account Manager for information on sizing Tyvek® coverall suits.

## (C) MICROMAX NS SUITS

Features high MVTR (Moisture Vapor Transmission Rate) and protection from dry particulates and light liquid splash. Comes with elastic wrists and ankles.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>C</b>	<b>MNSA428LG</b>	MicroMax NS Hooded Suit, 25/cs	L	1cs
	<b>MNSA428XL</b>	MicroMax NS Hooded Suit, 25/cs	XL	1cs
	<b>MNSA428-2X</b>	MicroMax NS Hooded Suit, 25/cs	2XL	1cs
	<b>MNSA4283X</b>	MicroMax NS Hooded Suit, 25/cs	3XL	1cs
	<b>MNSA4284X</b>	MicroMax NS Hooded Suit, 25/cs	4XL	1cs

## (D-E) TYVEK® ALTERNATIVE KEYGUARD SUITS

KeyGuard coverall is a cost savings alternative that provides the worker with outstanding protection, durability, and comfort. KeyGuard is a microporous polyolefin fabric that offers effective protection.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>D</b>	<b>CVLKGELG</b>	Non-Hooded Suit, 25/cs	L	1cs
	<b>CVLKGEXL</b>	Non-Hooded Suit, 25/cs	XL	1cs
	<b>CVLKG2XL</b>	Non-Hooded Suit, 25/cs	2XL	1cs
	<b>CVLKG3XL</b>	Non-Hooded Suit, 25/cs	3XL	1cs
	<b>CVLKG4XL</b>	Non-Hooded Suit, 25/cs	4XL	1cs
<b>E</b>	<b>CVLKGHELG</b>	Hooded Suit, 25/cs	L	1cs
	<b>CVLKGHEXL</b>	Hooded Suit, 25/cs	XL	1cs
	<b>CVLKGHE2XL</b>	Hooded Suit, 25/cs	2XL	1cs
	<b>CVLKGHE3XL</b>	Hooded Suit, 25/cs	3XL	1cs
	<b>CVLKGHE4XL</b>	Hooded Suit, 25/cs	4XL	1cs



## (F) VALUE HOODED SUITS WITH BOOTIES

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>F</b>	<b>CVLNWBLG</b>	Value Hooded Suit w/ Booties, 25/cs	L	1cs
	<b>PPCLIH660XL</b>	Value Hooded Suit w/ Booties, 25/cs	XL	1cs
	<b>CVLNWB2XL</b>	Value Hooded Suit w/ Booties, 25/cs	2XL	1cs
	<b>CVLNWB3XL</b>	Value Hooded Suit w/ Booties, 25/cs	3XL	1cs
	<b>CVLNWB4XL</b>	Value Hooded Suit w/ Booties, 25/cs	4XL	1cs

## (G) SAFETY COVERALL W/ HOOD

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>G</b>	<b>SSG428BLGXL</b>	Safety Coverall w/ Hood, 25/cs	XL	1cs

## (H) PROSHIELD® 10 SMS W/HOOD

DuPont™ ProShield® 10 disposable garments are designed for workers in a range of industries for nonhazardous dry particle and light liquid splash applications. Garments constructed of SMS fabric are strong and durable, yet offer outstanding comfort, breathability, softness, and wearability. SMS is lightweight and resistant to tears and punctures.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>H</b>	<b>CVLSMSHEXL</b>	ProShield SMS Hooded Suit, 25/cs	XL	1cs
	<b>CVLSMSHE2XL</b>	ProShield SMS Hooded Suit, 25/cs	2XL	1cs
	<b>CVLSMSHE3XL</b>	ProShield SMS Hooded Suit, 25/cs	3XL	1cs

## (I) PROTECTIVE SHOE COVERS

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>I</b>	<b>FC450SGY00020000</b>	Tyvek NS Shoe Cover, 200/cs	L	1cs
	<b>PPCLSCXLK</b>	Tyvek Alternative Shoe Cover, 300/cs	XL	1cs
	<b>SCSSLG</b>	Value Shoe Cover NS, White, 300/cs	L	1cs
	<b>SCSSXL</b>	Value Shoe Cover NS, Blue, 300/cs	XL	1cs

## (J) PROTECTIVE SLEEVES

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>J</b>	<b>AGKGL</b>	Tyvek Alternative 18" Sleeve, 200/cs	L	1cs
	<b>TY500SWH00020000</b>	Tyvek 18" Sleeve, 100/cs	L	1cs





### (A) 3M HOOD ASSEMBLY, COLLAR, PREMIUM HEAD SUSPENSION FOR PAPR SYSTEM

The 3M Hood Assembly S-655 consists of an S-950 Premium Head Suspension and an S-605 Hood. Approved for use with certain 3M Powered Air Purifying and Supplied Air Respirator Systems.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>7000002347</b>	3M Hood Assembly, Collar, Premium Head Suspension	1
	<b>051131373025</b>	3M Lense Cover Peel-Offs, Fits 3M S-655 Hood, 40/pk	1PK
	<b>051131170919</b>	3M Replacement Hood w/ Inner Collar	1

A



### (B) 3M VERSAFLO BELT MOUNTED ASSEMBLY FOR PAPR SYSTEM

The TR-613N assembly includes motor/blower (TR-602N), standard battery (TR-630), length adjusting breathing tube (BT-30), high durability belt (TR-626), airflow indicator (TR-971). Headtops, filters, cartridges and battery charger sold separately.

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>7100035757</b>	3M Versaflo Belt-Mounted PAPR Assembly	1

B



### (C) 3M BREATHING TUBE FOR VERSAFLO PAPR SYSTEM

This breathing tube is used on 3M Versaflo PAPR Systems and is adjustable in length.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>PS3MBT-30</b>	3M Breathing Tube	1

C

### (D-E) 3M VERSAFLO ORGANIC VAPOR/HIGH EFFICIENCY CARTRIDGE & FILTER

The TR-6510N filter is a combination High Efficiency (HE) particulate filter and Organic Vapor (OV) cartridge for use with TR-600 series PAPRs. 3M recommends the use of the TR-6500FC filter cover to help protect the filter from physical damage (sold separately).

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>051131373612</b>	3M Organic Vapor/High Efficiency Cartridge	1
<b>E</b>	<b>7100021252</b>	3M PAPR Filter Cover	1

D

E



### (F-G) 3M VERSAFLO SINGLE STATION BATTERY CHARGER

The TR-641N Battery Charger Kit is a complete single station battery charger for TR-600 Series PAPRs. It consists of a TR-640 Cradle and a TR-941 Power Supply.

KEY	SKU	DESCRIPTION	MIN QTY
<b>F</b>	<b>7100035838</b>	3M Versaflo Single Station Batter Charger Kit	1
<b>G</b>	<b>7100035835</b>	PAPR Standard Battery	1

F

G



## (A-B) SPECTRUM CONTINUOUS FLOW RESPIRATOR MASK

The Spectrum Continuous Flow Supplied Air Respirator is compatible with economical low-pressure air sources such as Bullard Free-Air® pumps or with conventional breathing air compressors or cylinders. Spectrum meets ANSI/ISEA Z87.1+ 2010 Impact Face Protection and OSHA Assigned Protection Factor (APF) of 1,000.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>PSBCC20SYS2M</b>	SAR Free Air (2)20TIC (2)20BT	-	1KT
	<b>PSBSPECLSYS2M</b>	SAR Free Air SPECCFML	-	1KT
<b>B</b>	<b>BPASPECLM</b>	PAPR Spectrum Full Facepiece	M/L	1
	<b>PSBSPECCFML</b>	SAR Spectrum Full Facepiece Cont.	M/L	1
	<b>PSSPEC35L</b>	SAR Comp Air SPECCFML SPECBT F35	-	1
	<b>PSSPEC40L</b>	SAR Comp Air SPECCFML SPECBT F40	-	1
	<b>PSBCC20TIC35</b>	SAR Free Air 20TIC 20BT F35	-	1

## (C) AIRFLOW BREATHING TUBE ASSEMBLY KIT

This breathing tube assembly controls the flow of air into the respirator.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>PSBV30</b>	SAR Comp Air CC20 / RT Brth Tube Hd Clmp	1

## (D) SAFETY HOOD LENS COVER

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>PSB20LCL</b>	SAR/PAPR Spectrum Mylar Lens Cover – Clear, 25/cs	1cs

## (E) BULLARD® CALIBRATION KIT

For use with Bullard® Clean Air Box Series Systems. Includes 34L CO gas cylinder, 34L zero air cylinder, regulator with tubing, and connector fitting. Manufactured in an ISO 9002 Registered facility.

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>PSCABCK</b>	SAR Air Filter – CAB Calibration Kit 34L	1
	<b>PS41AF</b>	SAR Air Filter – 41 Series Filter Cartridge	1
	<b>PSB15921</b>	Free-Air Pump – Service Kit, EDP10	1
	<b>PS23611</b>	Free-Air Pump – Inlet Filter	1
	<b>B244852</b>	Free-Air Pump – Outlet Filter Jar	1
	<b>PSB263552</b>	Free-Air Pump – Outlet Filter Assembly O-Ring	1
	<b>PSBICEOF</b>	Free-Air Pump – ICE Pump Inline Filter, 90 Mic	1
	<b>PSS17101</b>	Free-Air Pump – Outlet Filter Carbofine	1
	<b>PSBICESK11</b>	Free-Air Pump – ICE Pump Service Kit, ICEPUMP11	1

## (F) BULLARD® FREE-AIR® PUMP

Supplies air for two hood-style or three half or full face mask airline respirators. When placed in a clean air environment, Bullard Free-Air® pumps offer a low-cost means of supplying clean, breathable air to respirator wearers working in contaminated environments up to 300 feet away from the pump. They are easy to operate and maintain. Free-Air pumps do not require temperature alarms, CO monitors or airline filters, so they can be a cost-effective alternative to compressed air.

KEY	SKU	DESCRIPTION	MIN QTY
<b>F</b>	<b>PSBEDP16TE</b>	Free-Air Pump – Electric Drive, 2 QD	1

## (G) BULLARD® BREATHING AIR HOSE

For use with breathing air compressors and have 3/8" I.D. Starter hose has 1/4" female coupler and 1/4" male fitting. Air supply hose for use with free-air ambient pumps has 1/2" I.D. hose.

KEY	SKU	DESCRIPTION	MIN QTY
<b>G</b>	<b>PS4696100</b>	SAR Comp Air Sup Hose – V10, 3/8" ID, Start Ind.	1
	<b>V20100ST</b>	SAR Free Air Sup Hose – V20, 1/2" ID, Start Ind.	1







A



B

C



D

E



F/G



H

**(A) ALLEGRO FULL MASK CONTINUOUS FLOW SUPPLIED AIR RESPIRATOR —**

For SAR System. Made of silicone rubber for durability and will hold its shape even in extreme heat and cold. Double sealing flange provides an improved face-to-mask seal and a deep chin pocket provides a better, more comfortable fit. Replaceable polycarbonate lens offers a wider, distortion-free viewing area with an anti-fog, anti-scratch coating. Comes with OBAC quick connects. NIOSH approved.

KEY	SKU	DESCRIPTION	MIN QTY
A	PSAL9901	Full Face Respirator – Low-Pressure	1
	PSAL9902	Full Face Respirator – High-Pressure	1
	PSAL9901-25	Lens Cover Peel-Offs – Fits 9901 Full Face Mask, 25/cs	1cs
	PSAL2025	Full Face Respirator Storage Bag	1
	PSAL9901-09L	Full Face Respirator Replacement Lens – Fits 9901	1
	PSAL9920-01A	Full Face Respirator Breathing Tube Assembly – Fits 9901	1

**(B) LOW FLOW ADAPTER FOR SAR SYSTEM —**

For use as a low-pressure supplied air respirator, the Low-Pressure Flow Adapter allows the hood to connect to an ambient air pump, or any low-pressure air source. Low profile, lightweight, plastic threaded fitting offers quick connect design with belt and clip assembly. Requires an air supply pressure range of 2 to 40 psi.

KEY	SKU	DESCRIPTION	MIN QTY
B	PSAL9910-11	Low-Flow Adapter for SAR System	1

**(C) TYVEK® HOOD ASSEMBLY WITH SUSPENSION FOR SAR SYSTEM —**

Designed with one piece construction breathing tube and head suspension integrated with hood assembly. Fully disposable, eliminating the need for decontamination. Flexible and splash resistant multi-layer sound dampening breathing tube ideal for workers with beards or glasses. Designed to connect to Adjustable Flow Control Valve, Personal Air Cooler or Air Temperature Controller.

KEY	SKU	DESCRIPTION	MIN QTY
C	PSAL9911-20	Tyvek Hood w/suspension for SAR System – Replacement	1
	PSAL9910-03	Ratchet Hood Suspension – Fits 991120 Tyvek Hood	1
	PSAL-9910-25	Lens Cover Peel-Offs – Fits 991120 Hood, 10/cs	1

**(D) ALLEGRO AMBIENT AIR PUMP FOR SAR SYSTEM —**

The easiest way to meet your needs is for portable air sources for up to three respirator users or two hood users.

KEY	SKU	DESCRIPTION	MIN QTY
D	PSAL9832	Ambient Air Pump – 1500 (0-20cfm) w/OBAC Fittings	1

**(E) ALLEGRO AMBIENT AIR PUMP – MODEL A-750 —**

Portable and lightweight air source for one hood user. Solid performance in multiple applications.

KEY	SKU	DESCRIPTION	MIN QTY
E	PSAL9821	Ambient Air Pump – Model A-750, 3/4hp Motor	1
	PSAL9700-01	Ambient Air Pump Filter – Model A-750, Inlet Filter Element	1
	PSAL9700-02	Ambient Air Pump Filter – Model A-750, Exhaust Filter	1

**(F-G) RESPIRATOR AIR HOSE FOR SAR SYSTEM —**

KEY	SKU	DESCRIPTION	MIN QTY
F	PSAL9100-100	Respirator Air Hose Extension – Low-Pressure, 100'	1
	PSAL9100-50	Respirator Air Hose Extension – Low-Pressure, 50'	1
G	PSAL9101-100B	Respirator Air Hose Extension – High-Pressure, 100'	1

**(H) ALLEGRO AIR BAG 12 —**

12" metal blower system with ducting built into a heavy duty polyester bag for an all-in-one unit for ease of operation. Designed with zippered ends that allow blower use without removing blower from the bag. Zipper openings allow for plug/cord inlet and outlet.

KEY	SKU	DESCRIPTION	MIN QTY
H	PSAL9535-12	Allegro Air Bag – 12" Ventilation Blower System	1

## (A-C) SPRAY SOCK

One-size-fits-all painters spray sock fits snugly around head and neck to protect against dirt, dust, and overspray. Available in cotton and lycra.

KEY	SKU	DESCRIPTION	MIN QTY
A	1412	Spray Sock, 12/cs	1cs
B	SUIT230-PH18TF	Painters Spray Sock, Cotton Blend, 12/cs	1cs
C	PSSAS6910	Painters Spray Sock, Deluxe, Lycra – Black	1



## (D-E) GOGGLES & LENS COVERS

**PAC045** - Advanz Lens Cover fits over all brands of full-face respirators and contains 36 frame advances.

**PSA030** - Advanz Goggles contain 30 frame advances. Disposable with anti-fog lens, fits over eye glasses.

KEY	SKU	DESCRIPTION	MIN QTY
D	PAC045	Goggles, Lens Cover – Clear	1
E	PSA030	Goggles, Disposable, Anti-fog	1



## (F-G) GOGGLES & LENS COVERS

**SAS5110** - Anti-fog coating on interior lens, 99.9% UV protection, vents prevent liquid from getting into eyes, curved lens and anti-splash design. Meets ANSI Z87.1.

**SAS5111** - Package of 10. Protect the lens on your goggles with these easy-to-use peel-off lens covers. Covers protect lens against paint and chemical overspray.

KEY	SKU	DESCRIPTION	MIN QTY
F	SAS5110	Goggles, Overspray	1
G	SAS5111	Goggles, Peel-off Lens Covers, 10/cs	1cs



## (H) EYE WASH

KEY	SKU	DESCRIPTION	MIN QTY
H	SPPSEW40Z	Eye Wash – 4oz Bottle	1



## (I) FIRST-AID KIT

25 person, 113 piece kit designed for contractors. The steel case contains 17 key first aid products including bandages, gauze pads, compresses, eye care products, ointment, wipes, tape, scissors and tweezers. This kit meets OSHA and ANSI requirements.

KEY	SKU	DESCRIPTION	MIN QTY
I	FA223	First-Aid Kit – 25 person	1

## SPILL KITS (NOT PICTURED)

KEY	SKU	DESCRIPTION	MIN QTY
	PSKIT220	Spill Kit in High-Vis Bag – Absorbs up to 9 Gal	1
	PSKIT336	HazMat Spill Kit – 30 Gal Overpack	1





## MASKS AND RESPIRATORS

Using a variety of patented technologies and features that enable them to filter a broad range of particles, these 3M disposable masks are NIOSH certified to have a filter efficiency of 95% or greater against particulates free of oil. The patented filter media uses advanced electrostatically charged micro fibers to help make breathing easier and cooler for advanced comfort. 3M masks are lightweight for more comfort and increased wear time on the job.



A



B



C



D



E



F

### (A-B) 3M 8210 N95 RESPIRATOR, 2-STRAP

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	CASES/PALLET	MIN QTY
A	PS3M8210	3M N95 Respirator, 2 Straps	20	8	40	1cs
B	PS3M8210V	3M N95 Respirator w/ Valve, 2 Straps	10	8	40	1cs

### (C) 3M 8200 N95 LIGHT DUTY RESPIRATOR, 2-STRAP

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	CASES/PALLET	MIN QTY
C	PS3M8200	3M L.D. N95 Respirator	20	8	40	1cs

### (D) 3M 8511 N95 RESPIRATOR WITH EXHALATION VALVE, 2-STRAP

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	CASES/PALLET	MIN QTY
D	PS3M8511	3M N95 Respirator w/Valve, 2 Straps	10	8	35	1cs

### (E-F) 3M FILTER DISKS

NIOSH approved filter disks provide at least 95% filtration efficiency against solid and liquid aerosols including oils. NIOSH 42 CFR 84.

KEY	SKU	DESCRIPTION	MIN QTY
E	PS3M2071	3M P95 Filter Disk, Sold in Pairs	1PR
F	RESP2091	3M P100 Filter Disk, Sold in Pairs	1PR

### (G-J) 3M HALF- & FULL- FACE REPLACEMENT CARTRIDGES & FILTERS

KEY	SKU	DESCRIPTION	MIN QTY
G	PS3M501	3M 501 Half Face-Respirator Filter Retainer	1
H	PS3M5P71	3M 5P71 Half-Face Respirator Particulate Filter	1
I	PS3M6001	3M 6001 Half-Face Respirator, Organic Vapor Cartridge, Sold in Pairs	1PAIR
J	RESP60921	3M Cartridge/Filter, Organic Vapor, P100, Sold in Pairs	1PAIR



G



H



I



J





## (A) 3M HALF-FACE RESPIRATORS, 6000 SERIES

The 6000 series half-face respirator provides reusable, economical protection. Facepiece is made from soft, lightweight thermoplastic elastomer which offers unsurpassed comfort and maximum versatility with an easy to adjust standard head strap. Compatible P95 rated particle filters are simple to remove and replace, with a built-in set and twist feature, which eliminates the need for a filter holder.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>RESP6100</b>	3M Half-Face Respirator	S	1
	<b>PS3M6200</b>	3M Half-Face Respirator	M	1
	<b>PS3M6300</b>	3M Half-Face Respirator	L	1

Refer to schematics on page 69.

## (B) 3M FULL-FACE RESPIRATORS, 6000 SERIES

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>B</b>	<b>PS3M6800-PC</b>	3M Full-Face Respirator	M	1
	<b>PS3M6900</b>	3M Full-Face Respirator	L	1

Refer to schematics on page 69.

## (C) 3M LENS ASSEMBLY, 6000 SERIES FULL FACEPIECE


Use as a replacement part on 3M Full Facepieces 6000 Series

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>PS3M6898-PC</b>	3M Lens Assembly – 6000 Series Full-Facepiece	1

## (D-M) 3M HALF-FACE & FULL-FACE REPLACEMENT PARTS

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>PS3M6885</b>	3M Lens Cover Peel-Offs, Fits 6000 Series, 100/pk	1PK
<b>E</b>	<b>051138541496</b>	3M Center Port Adapter, Full Facepiece	1
<b>F</b>	<b>PS3M688037002</b>	3M Side Caps, Full Facepiece	1
<b>G</b>	<b>021200603315</b>	3M Plugs, Full Facepiece, Mouth	1
<b>H</b>	<b>PS3M6897</b>	3M Head Harness, Fits 6000 Series Full Facepiece	1
<b>I</b>	<b>PS3M6864-PC</b>	3M Center Adapter Assembly, Fits 6000 Series	1
<b>J</b>	<b>PS3M6894-PC</b>	3M Nose Cup Assembly, Fits 6000 Series	1
<b>K</b>	<b>PS3M6893</b>	3M Inhalation Valve, Fits 6000 Series, Diskside	1
<b>L</b>	<b>PS3M6895</b>	3M Inhalation Gasket, Fits 6000 Series, Outside	1
<b>M</b>	<b>PS3M6896</b>	3M Center Adapter Gasket, Fits 6000 Series, Full Facepiece, Mouth	1



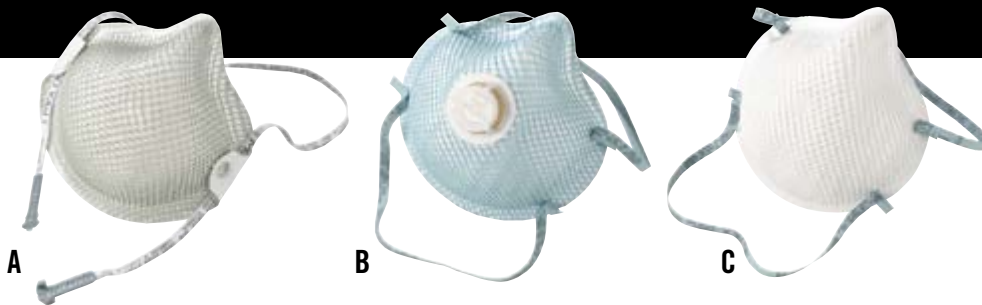

**MOLDEX®**  
Ideas that wear well.™

## MOLDEX® DISPOSABLE AND REUSABLE RESPIRATORS

Breathe easy with a Moldex disposable particulate respirator. They're NIOSH certified to have a filter efficiency of 95% or greater against particulates free of oil. That's some clean air. Enjoy a contoured nose bridge and a soft foam nose cushion for comfortable seal—without a metal nose band. The exclusive Dura-Mesh® shell protects the filter media so it stays clean longer. It's built to resist collapsing in hot and humid conditions, so the respirator holds its shape longer. Bottom line—fewer respirators are used = you save money.

### (A) MOLDEX 2600 N95 RESPIRATOR, HANDYSTRAP®

- HandyStrap® with buckle allows mask to hang down around neck when not in use
- Stretch cloth straps feel cool and comfortable against the skin
- Softspun® lining for added comfort and durability

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	MIN QTY
A	2600N95	Moldex N95 Respirator w/HandyStrap	15	12	1cs

### (B) MOLDEX 2300 N95 RESPIRATORS WITH EXHALE VALVE, 2-STRAP

- Exhale valve reduces hot air build-up and keeps workers cooler
- Naturally contoured facepiece with foam nose cushion relieves pressure points
- Softspun® lining gives added comfort and durability

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	MIN QTY
B	2300N95	Moldex N95 Respirator w/Valve, 2 Straps	10	10	1cs

### (C) MOLDEX 2200 N95 RESPIRATOR, 2-STRAP

- Naturally contoured facepiece relieves pressure points
- Softspun® lining gives added comfort and durability

KEY	SKU	DESCRIPTION	QTY/BOX	BOXES/CASE	MIN QTY
C	2200N95	Moldex N95 Respirator, 2 Straps	20	12	1cs

### (D) MOLDEX HALF-FACE PROTECTION 7000 SERIES

PVC-Free®. Sleek and light-weight design for modern, high-tech look and increased worker acceptance. Extra-wide sealing area provides all-day comfort. Fits well under welding helmets and with safety glasses. Mask drops down for convenient storage around the neck or locks down for custom fit.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
D	MM7001	Moldex Half-Face, 7000 Series	S	1
	MM7002	Moldex Half-Face, 7000 Series	M	1
	MM7003	Moldex Half-Face, 7000 Series	L	1

### (E-F) MOLDEX FULL-FACE PROTECTION 9000 SERIES

Cost effective, high tech, streamlined design for exceptional worker acceptance. Exclusive over-molded lens offers greater field of vision. Lighter weight for superior all-day comfort. Fewer parts means less cost and easy maintenance. Tear-away lens protector included. Meets ANSI Z87+ for high-impact requirements. Filters sold separately.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
E	MM9002	Moldex Full-Face, 9000 Series	M	1
	MM9003	Moldex Full-Face, 9000 Series	L	1
F	MM0093	Lens Cover Peel-Offs, Fits 9000 Series, 15/pk	-	15Pk



# SAFETY & PROTECTIVE



## (A-G) MOLDEX HALF-FACE & FULL-FACE REPLACEMENT FILTERS & CARTRIDGES (7000 & 9000 SERIES)

KEY	SKU	DESCRIPTION	MIN QTY
A	MM7020	Moldex Pre-Filter Retainer, Sold in Pairs	1PR
B	MM7920	Moldex Filter Disk, Piggyback Adapter, Fits 7000/9000 Series	1PR
C	MM7990	Moldex P100 Cartridge, Fits 7000/9000 Series, Sold in Pairs	1PR
D	MM7100	Moldex 7100 Respirators Organic Vapor PVC Free, Sold in Pairs	1PR
E	MM7140	Moldex Stacked Cartridge/Filter, Fits 7000/9000 Series, Sold in Pairs	1PR
F	MM7940	Moldex 100 Particulate Filter Disk, Sold in Pairs	1PR
G	MM8910	Moldex N95 Filter Disk, 5 Pairs/bag	1BG

## (H) SAFETY GLASSES

High-impact polycarbonate lenses, anti-fog coating, 99.9% UV protection, wrap-around design, non-slip temples, scratch resistant lenses, non-slip rubber nose piece. Meets current ANSI Z87.1 2003 standard. Yellow, clear or smoke mirror lens available.

KEY	SKU	DESCRIPTION	MIN QTY
H	PSSAS540-0205	Safety Glasses, Diamondback – Yellow	1
	PSSAS540-0200	Safety Glasses, Diamondback – Clear	1
	PSSAS540-0203	Safety Glasses, Diamondback – Smoke/Mirror	1

## (I-K) SINGLE LENS DESIGN SAFETY GLASSES

High-impact polycarbonate lenses, 99.9% UV protection, single lens design, scratch-resistant lightweight wrap-around lens. Meets current ANSI Z87.1+ standard. Yellow, Clear, or smoke lens available.

KEY	SKU	DESCRIPTION	MIN QTY
I	PSSAS5332	SAS Safety Glasses, NSX Turbo – Yellow Lens	1
J	PSSAS5330	SAS Safety Glasses, NSX Turbo – Clear Lens	1
K	PSSAS5331	SAS Safety Glasses, NSX Turbo – Smoke Lens	1

## (L) EYE WEAR CLEANING WIPES FOR MASKS AND GLASSES

Perfect for cleaning eyewear or computer screens, these 100 individually wrapped pre-moistened wipes feature anti-fog, anti-static, silicone-free cleaning. Excellent on glass or polycarbonate lenses, the large 5" x 8" wipes are stored in a wall-mounted cardboard dispenser. Dimensions: 4-3/4"w x 9"h x 2-5/8"d.

KEY	SKU	DESCRIPTION	MIN QTY
L	PSAL0350	Eyewear Cleaning Wipes, 100/box	1BX

## (M) HARD HATS

Nylon suspension with adjustable head cradle. Complies with ANSI Z89.1, Class G, E and C.

KEY	SKU	DESCRIPTION	MIN QTY
M	PSSAS7160-01	Hard Hat – White, 12/case	1
	PSSAS7160-45	Hard Hat, with Ratchet – White, 12/case	1





**(A) G-TEK GLOVES**

These easy-grip gloves are perfect for the insulation industry. Constructed of woven nylon, the nitrile coated palm and fingers will allow you to pick up the smallest of items without having to remove your gloves.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>G225M</b>	Nylon Gloves, Nitrile Dipped	M	1PR
	<b>PSGLV34225L</b>	Nylon Gloves, Nitrile Dipped	L	1PR
	<b>G225XL</b>	Nylon Gloves, Nitrile Dipped	XL	1PR

**(B) DOUBLE-DOT FINGERNAILS™ GLOVES**

Seamless cotton/polyester gloves with two-sided PVC dots.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>B</b>	<b>S55D2</b>	Gloves, FingerNails™ Double Dot	L	1PR

**(C) LEATHER PALM WORK GLOVES**

Leather palm work glove constructed of heavy side split cowhide.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>PSSAS670-6529</b>	Gloves, Split Palm Leather	1PR

**(D) LATEX PALM COAT GLOVES**

String knit glove with a blue latex palm. Coated palm offers abrasion resistance and increased grip. Uncoated back allows the hand to breathe.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>D</b>	<b>S966E</b>	Gloves, String Knit, Blue Latex Palm Coat	L	1PR

**(E) BROWN JERSEY GLOVES**

Strong, comfortable hand protection, 8 oz. brown cotton jersey knit. Ideal for general purpose applications.

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>C70BJ</b>	Gloves, Brown Jersey, Men's	1PR

**(F) PRO IMPACT BLACK “HIGH PERFORMANCE” GLOVES**

Synthetic leather palm for secure grip, silicone strips on fingertips for handling small tools and parts, padded palms. Perfect for use with pneumatic tools. Velcro® closure.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>F</b>	<b>PSSAS6713</b>	Gloves, Pro Impact – Black	L	1PR
	<b>PSSAS6714</b>	Gloves, Pro Impact – Black	XL	1PR

**(G) HEADLAMPS**

Includes three LEDs and a xenon bulb in the same reflector. Three-position lighting lets you select the best combination of lights for the task at hand. Powered by 3 “AAA” alkaline batteries (included). 300 mA xenon bi-pin bulb, plus three 100,000-hour life LEDs. 18 lumens typical (xenon); 24 lumens typical (3 LEDs). Weighs 4.64 oz.

KEY	SKU	DESCRIPTION	MIN QTY
<b>G</b>	<b>61050SL</b>	Headlamp, 3 LED w/ Xenon Bulb – Black	1



DRAFTSTOP, AND FIRESTOP CAULK

(A) BOSS® 136 FIREBLOCK DRAFTSTOP SEALANT

Fire rated sealant and non-combustible filler caulking. Used in the annular space around wires, pipes, ducts, vents, cable lines and other penetrations to the building envelope. Applicable standards include: UBC page 1-387, 1997 edition, CABO section 602.7 item 4, 1995 edition, BOCA (NBC) 704.4.1.1 1996 and ASTM E-136.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
A	03221PK10	Boss 136 Firestop – Draft Sealant	12	108

(B) BOSS® 816 INTUMESCENT FIRESTOP SEALANT

Non-sag, water-based sealant and smoke seal that is easy to apply and clean up. Prevents the spread of toxic gases, water, smoke and fire through joint openings. Meets ASTM E-814 (UL 1479), standard test method for fire tests of through-penetration firestops. Conforms to BOCA National Building Code (1996), CABO one and two family dwelling code (1995), Uniform Building Code (1997). See UL Fire Resistance Directory for a list of systems established for Boss 816.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
B	03642RD10	Boss 816 Intumescent	12	108

(C) FIRE SEAL FS136R

Tested to meet and exceed ASTM-E136 and ASTM-E814 standards for fireblocking/firestopping single-family residential construction. Fire Seal possesses superior adhesion and freeze-thaw characteristics and is the contractors’ #1 choice for fireblocking non-rated wood-frame construction. Fire Seal will not shrink, crack, or crumble upon cure. Fire Seal creates an air-tight barrier to prevent passage of flames, smoke, and toxic gases from spreading area to area within concealed spaces.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
C	FS136R	Fire Seal 136 Fireblock, 10.3oz Tube	12	120





## (A) BOSS® 355 LATEX CAULK

7-Year general purpose latex caulk designed for interior use. Use around windows, door frames, baseboards, or any joint or gap where a weather-tight seal is required. Adheres well to wood, masonry, brick, and plaster.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>A</b>	<b>SC35501</b>	Boss 355 7-Year Caulk	12	108

## (B) BOSS® 357 ACRYLIC PAINTER'S CAULK

20-Year acrylic latex caulk designed for both interior and exterior use. Adheres well to wood, masonry, brick, and plaster. Available in white.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>B</b>	<b>SC357W</b>	Boss 357 20-Year Caulk	12	108

## (C) BOSS® 360 SEALANT SILICONIZED PAINTER'S CAULK

35-Year siliconized latex caulk designed for both interior and exterior use. Forms a tough, resilient bond to most building material surfaces. It has excellent resistance to water, weathering, and cures to produce a flexible seal that is non-yellowing and paintable. Available only in white.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>C</b>	<b>SC360W</b>	Boss 360 35-Year Caulk, White	12	108



## (D) BOSS 363 ACRYLIC LATEX CAULK WITH SILICONE

50-Year acrylic latex caulk with silicone that is designed for both interior and exterior use. Forms a tough, resilient bond to most building material surfaces. It has excellent resistance to water, weathering, and cures to produce a flexible seal that is non-yellowing and paintable.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>D</b>	<b>SC363W</b>	Boss 363 50-Year Caulk – White	12	108
	<b>SC363C</b>	Boss 363 50-Year Caulk – Clear	12	108

## (E) BOSS® 920 75-YEAR 100% ACRYLIC ELASTOMERIC LATEX WITH SILICONE

Boss 920 100% Acrylic Elastomeric Adhesive/Sealant with Silicone is mildew resistant, rust inhibited and paintable. Can be used for both interior and exterior applications such as crown molding, chair rails, baseboards and all exterior trim. Cures to a tough, flexible seal that is non-yellowing.

- Specifically formulated for high joint movement
- Smooth, creamy consistency makes it easy to tool

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>E</b>	<b>SC920W</b>	Boss 920 Elastomeric – White	12	108

## (F) BOSS® 380 CONTRACTORS SILICONE SEALANT

100% Silicone caulk provides a weather and waterproof seal, with ozone, UV & radiation and extreme temperature protection. Suitable for your general construction applications. Fills and seals gaps around windows, doors, vents, fixtures and lights.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASE/PALLET
<b>F</b>	<b>SC380W</b>	Boss 380 Sealant – White	12	108
	<b>SC380C</b>	Boss 380 Sealant – Clear	12	108



# CAULK ACCESSORIES



## (A-B) ALBION® B-LINE CARTRIDGE GUNS, 12:1 DRIVE

Engineered with the professional in mind. Features Albion's Double-Gripping Plate technology for double the life of the tool and adjustable wear compensation device for no-loss trigger motion.

- 12:1 thrust ratio
- Ladder hook pull
- Smooth action
- Cartridge puncture tool
- Comfortable grip

KEY	SKU	DESCRIPTION	QTY/CASE	MIN QTY
A	CGUNB12	Pint Cartridge Gun	12	1
B	ALB12Q	Quart Cartridge Gun	12	1

## (C) ALBION® VIPER CARTRIDGE GUNS, 6:1 DRIVE

State-of-the-art design makes these tools value leaders. The convenient built-in spout cutter and puncture tool make for simple operation.

- 6:1 Thrust Ratio
- Ladder hook pull
- Ratchet Caulk Gun
- Cartridge puncture tool

KEY	SKU	DESCRIPTION	QTY/CASE	MIN QTY
C	CGUNR6B	Pint Cartridge Gun	24	1
	CGUNR6BQ	Quart Cartridge Gun	24	1

## (D-E) ALBION® ELECTRIC CAULK GUNS

Electric Cartridge Gun has 400 lbs of dispensing force. Variable speed trigger with max speed dial and auto reverse for no-drips.

- Lightweight
- Includes: Lithium-ion battery & charger
- Ladder hook pull
- Battery fuel gauge
- Fast 30-minute recharge

KEY	SKU	DESCRIPTION	MIN QTY
D	ALBE12	Electric Pint Cartridge Gun – 12V	1
E	AE12Q	Electric Quart Cartridge Gun – 12V	1

## (F) CAULK WARMING BAG

This bag is designed to keep your caulk warm in cold weather.

- Heavy duty waterproof nylon construction
- Low energy consumption
- Plugs into 120 VAC or 12 VDC Inverter SKU #75WI\*
- Retains heat when unplugged

KEY	SKU	DESCRIPTION	MIN QTY
F	893612001097	Caulk Warming Bag	1

The Caulk Warmer holds 12 standard size caulk tubes, or 7 quart size tubes, or 12 sausage size tubes, or 7 cans of foam.  
\*Power Inverter sold separately. See Item H, SKU CLKWBI.

## (G) CAULK WARMER® BAG SAVER SLEEVES

Caulk Warmer Bag Saver Sleeves help keep the inside of the bag clean and retains heat when item is out of the warmer. Simply slide over your caulk tube or caulk gun to keep the inside of your caulk warmer clean.

KEY	SKU	DESCRIPTION	MIN QTY
G	1108-BS	Caulk Warmer Bag Saver Sleeves – 25/pk	1pk



## (H) 12V DC 100-WATT INVERTER FOR CAULK AND CYLINDER WARMER

Provides overload protection, over voltage protection and over temperature protection. Additional uses include digital cameras, mobile phones, and notebook computers. The Power Inverter is the solution to using electricity in your automobile.

- Convert DC to AC
- Continuous power 100W—maximum power of 140W

KEY	SKU	DESCRIPTION	MIN QTY
H	CLKWBI	12V DC 100-Watt Inverter	1



## (A-B) SPRAY ADHESIVES

Fast tacking and high bond strength product for a wide variety of substrates. Capable of handling virtually any light or heavy duty job. VOC compliant, fast drying, high strength web spray.

KEY	SKU	DESCRIPTION	CANS/CASE	CASES/PALLET
A	AC50ADH	Intertape Spray Adhesive, 17oz Cans	12	105
B	SOUDAL158628	Soudabond Power Spray, 12oz Cans	12	136



## (C) WATER-BASED DUCT SEALANT

A fiber reinforced, water-based, premium quality, UL Listed, high velocity duct sealant for commercial and residential supply and return air duct use. Used for sealing joints, seams, and duct wall penetrations on metal air duct; for sealing connections on flexible duct or fiberglass duct board, and is recommended up to 15 inches of water column pressure.

- LEED qualified, ZERO VOC's
- Non-flammable
- 2-Year shelf life

KEY	SKU	DESCRIPTION	MIN QTY
C	DP1030-1G-GR	Duct Sealant, 1 Gal – Gray	1



## (D) TITEBOND® RADON SEALANT

Titebond® Radon Sealant is specifically designed to reduce the entry of radon. Use on foundation cracks, joints and penetrations, around foundation coatings normally used for damp proofing, and membranes surrounding the foundation. It is an extremely flexible and durable product which allows for extension and compression of at least 25%.

- No mixing or primer required
- VOC compliant in all 50 states
- Application Range 40°F to 120°F
- Joint Movement Capability  $\pm$  25%

KEY	SKU	DESCRIPTION	TUBES/CASE	CASES/PALLET
D	CLK3251	Titebond Radon Sealant, 10.1oz – Gray	12	108



## (E) MANUS-BOND 50-AC ACOUSTICAL SEALANT

Non-drying butyl, synthetic rubber-based sealant for reducing sound and vapor transmission in partition systems. It remains flexible for a long-lasting, resilient, and acoustic seal. Conforms to CAN/CGSB 19.21 M87.

KEY	SKU	DESCRIPTION	TUBES/CASE	CASES/PALLET
E	C52A01	Manus-Bond, 28oz Tube – White	12	32
	C52A02	Manus-Bond, 28oz Tube – Black	12	32



## SHEATHING TAPE

### WHITE SHEATHING TAPE

Sheathing tape with pressure sensitive adhesive that is aggressive and permanently tacky at room temperature when applied using light pressure to the substrate. Application temperature from 10° F to 230° F. Pinked edges for easy tearing.



SKU	DESCRIPTION	ROLLS/CASE
<b>SC5782-26WH</b>	2" x 55 yd White Sheathing Tape, Pinked	24
<b>SC5782-37WH72MM</b>	2.85" x 55 yd - ACT Sheathing 625, White, Pinked	16
<b>SC5782-37WH</b>	2" x 55 yd - ACT Sheathing 625, White, Pinked	24

### RED SHEATHING TAPE

Constructed of a 1.5 mil polypropylene film with excellent tensile strength. Designed for permanently sealing or repairing a variety of surfaces over a wide range of temperatures and moisture conditions. Product possesses an aggressive acrylic adhesive bonding strength. Pinked edges for easy tearing.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>SC5782-26RD</b>	2" x 55 yd, Red Sheathing Tape	24	36

### RED SHEATHING TAPE

The pressure sensitive adhesive (PSA) is aggressive and permanently tacky at room temperature when applied using light pressure to the substrate. The Polyester (PET) backing which gives the tape excellent mechanical characteristics and high resistance to moisture, solvents, oil and various chemicals. Pinked edges for easy tearing. Application temperatures of 0° F to 110° F.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>SC5782-26RD285</b>	2.85" x 55 yd Red Sheathing Tape, Pinked	16	36

## FOIL TAPE

### ECHO TAPE FSK (FOIL-SCRIM-KRAFT) TAPE UL CLASSIFIED

Echo Tape #110 FSK tape is used for seam sealing and patching of FSK-faced duct wrap insulation and other insulation applications where FSK facing is used; provides a matching appearance and vapor retarder integrity.

- Service temperatures of 0° F to 150° F (-18° C to 66° C)
- Application range of 10° F to 120° F (-12° C to 49° C)



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>SPTP1525CW-2</b>	2" x 50 yd	24	48
<b>TPFSK776896150</b>	4" x 50 yd	12	48

### ALUMINUM FOIL TAPE

Aluminum foil tape is ideal for sealing joints and seams against moisture and vapor on foil jacketing insulation. Tape has soft aluminum foil with acrylic adhesive and protected by an easy release liner. Suitable for many other permanent sealing, holding or masking applications requiring the protection offered by a foil backing. Service temperature -22° F to 248° F. Application temperature +23° F to 104° F.



SKU	DESCRIPTION	ROLLS/CASE
<b>TAFL2015016EC</b>	2" x 50 yd, 1.6mil Foil Tape, ECHO MT-A7757	24

### 3M VENTURE FOIL TAPE


UL classified, 2 mil with high tack adhesive. Superior conformability for sealing insulation and foil-faced sheathing.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TP1520CW2-2</b>	2" x 50 yd	24	36
<b>TP1520CW2-3</b>	3" x 50 yd	16	36

### 3M VENTURE FSK TAPE

6.5 mil tape is foil and fiberglass, scrim laminate designed for sealing scrim faced duct insulation. Used where extra strength beyond regular foil tape is needed.




SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TP1525CW-2</b>	2" x 50 yd	24	36
<b>TP1525CW-3</b>	3" x 50 yd	16	27
<b>TP1525CW-4</b>	4" x 50 yd	12	27

### 3M 2 MIL ALUMINUM FOIL TAPE UL CLASSIFIED

3M #120 foil tape is used for seam sealing and patching of foil and FSK-faced duct wrap and board insulation and other insulation applications where FSK or foil facing is used.

- Service temperatures of -25° F to 250° F (-32° C to 121° C)
- Application range of 10° F to 120° F (-12° C to 49° C)




SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TAFL30150C2</b>	3" x 50 yd	16	36
<b>051128960219</b>	4" x 50 yd	12	36



## POLY TAPE

## BLACK POLY FLEX 133



Polyethylene film, single coated with a rubber pressure sensitive adhesive. Low-residue aggressive adhesive which bonds well to most surfaces over a wide temperature range. Pinked edges for easy tearing. Operating temperature range of 32° F to 160° F.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TS4BK12P</b>	3.78" x 60 yd, Black Poly Flex, Pinked	12	36

## (A-B) 3M VENTURE POLYPROPYLENE FACING TAPE (PSK)

Tri-directionally reinforced UL listed white polypropylene/scrim/kraft lamination. Quick-stick in all weather conditions. 3" rolls.



KEY	SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>A</b>	<b>TP1537CW-3W</b>	3" x 50 yd, White Lamtec WMPVR	16	27
<b>B</b>	<b>TP1537CW-3B</b>	3" x 50 yd, Black WMPVR	16	27

## 3M VENTURE POLYMER FILM PRESSURE SENSITIVE TAPE

2.5 mil self-wound polymer film is designed to meet the stringent requirements of the Underwriters Laboratories standards UL181. The standards and the application are as follows: UL 181B, Closure Systems for Use with Flexible Air Ducts and Air Connectors; used to seal closures in flex duct and to seal flex duct vapor retarders to duct board. Use - UL 181BFX tape. Tape is for 181B applications only, and is not to be used for 181A applications.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>0750351500178</b>	3" x 120 yd	16	27

## 3M VENTURE PSK (POLY-SCRIM-KRAFT) TAPE UL CLASSIFIED

This tape is used for seam sealing and patching of PSK faced metal building insulation and other insulation applications where PSK facing is used. PSK has a white film outer surface.

- Can be used on Lamtec WMP-10 and WMP-30 facing.
- Service temperatures of 0° F to 150° F (-18° C to 66° C)
- Application range of 10° F to 120° F (-12° C to 49° C)



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TP1531CW-6W</b>	3" x 50 yd	16	27

## RAVEN PSK (POLY-SCRIM-KRAFT) TAPE VR-10

## TYPE UL CLASSIFIED

Raven #282 VR-10 PSK tape is used for seam sealing and patching of VR-10 faced metal building insulation and other insulation applications where VR-10 facing is used. VR-10 has a white film on the outer surface.

- Can also be used on Lamtec WMP-VR facing.
- Service temperatures of 0° F to 150° F (-18° C to 66° C)
- Application range of 10° F to 120° F (-12° C to 49° C)



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>SPTPVB4210</b>	4" x 50 yd	12	27

## ECHO TAPE DOUBLE COATED/SSL POLYESTER TAPE CARRIER UL CLASSIFIED

Echo Tape #250 double coated/SSL (Self-Seal Lap) tape is used to seal vapor retarder or facing overlap seams on mechanical and other types of insulation. It can be used to apply patches or to hang vapor retarders or facings on structural members.

- Service temperatures of 0° F to 150° F (-12° C to 66° C)
- Application range of -10° F to 120° F (-23° C to 49° C)



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TASS15180E</b>	1.5" x 60 yd	36	27

## ECHO TAPE WMP-VR TAPE

Echo Tape WMP-VR tapes are 3-way reinforced polypropylene film/scrim/kraft facing tapes, combined with a high performance cold weather solvent acrylic adhesive. They feature an easy release silicone treated liner and offer a superior quick stick at normal operating temperatures as well as great performance at low temperatures.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TPFSG7735350W</b>	Tape, 3" x 50 yd	16	27
<b>TPFSG7735350BK</b>	Tape, 3" x 50 yd, Black	16	27
<b>TAVR30150EWH</b>	Tape, Poly Facing WMPVR 3" x 50 yd, White	16	48
<b>TAVR30150EBK</b>	Tape, Poly Facing WMPVR 3" x 50 yd, Black	16	48

## BUTYL TAPE

### RAVEN BUTYL SEAL TAPE

Butyl seal is a double-sided aggressive reinforced butyl rubber tape used to join panels of polyethylene and polypropylene together by overlapping the edges and applying Butyl Seal in between. It is also used to adhere to concrete walls and footings when properly prepared. Butyl Seal is non-hardening and flexible.




SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TPBUTYL02</b>	Tape, Raven Butyl Seal, 2" x 50'	12	20

*\*Direct Ship, 3 Case Minimum Order.*

### GREY BUTYL TAPE

Backerless butyl tape which remains pliable and will not cure. Perfect for seaming reinforced poly.




SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>MBTAPEG</b>	Gray Butyl Tape, 1/32" x 1-1/2" x 30 yd	16	16

*DROP SHIP MIN 16 CASE/1 PALLET*

## DUCT TAPE

### INTERTAPE UTILITY GRADE DUCT TAPE


Utility grade 8 mil poly-coated cloth-backed tape with a very aggressive adhesive. Has good conformability and is water resistant.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TD15</b>	Intertape 8 mil, 1-7/8" x 60 yd	24	27

### INTERTAPE CONTRACTOR GRADE DUCT TAPE

Contractor grade 11 mil all-purpose duct tape with a natural rubber adhesive, aggressively bonds to almost any surface. Water resistant. Choose TD36 when high performance counts. UL723 rated, meets HUD and BOCA codes.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TD36</b>	11 mil, 1-7/8" x 60 yd	24	27

### INTERTAPE ALL-PURPOSE RED DUCT TAPE

All-purpose 9 mil with a natural rubber adhesive and with excellent adhesive properties. Water resistant. Used for color coding, critical location marking or a variety of repair projects.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TD20R</b>	9 mil, 1-7/8" x 60 yd	24	27

### INTERTAPE BLACK DUCT TAPE

Versatile duct tape works well for vapor sealing, sheet metal ductwork and general purpose heavy duty service.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TD15B</b>	Intertape Duct, 2" x 60 yd, Black	24	27

## VINYL TAPE

### 3M VENTURE EMBOSSED VINYL TAPE

Thin but strong premium white vinyl tape is shrink resistant. Used for seaming vinyl faced fiberglass insulation and for water heater blanket installation.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TP460-3W</b>	3" x 50 yd	36	27

### 3M VINYL FOAM SEALANT TAPE

3M Vinyl Foam Tape was designed to provide both a quick fix and long-lasting solution in applications that require vapor sealing and gap covering. Composed of a closed-cell vinyl foam coated with a pressure-sensitive acrylic adhesive. 3M vinyl foam sealant tape is grey in color; density—10 lb. per cubic foot.




SKU	DESCRIPTION	ROLLS/CASE
<b>TPFOAM14-50</b>	3M Vinyl Foam Sealant Tape 3/8" x 1/4" x 50'	32

## MASKING TAPE

### INTERTAPE UTILITY GRADE MASKING TAPE

5.1 mil for non-critical securing and bundling applications. A very comfortable backing with an aggressive adhesive.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TAMA20180ITPM513</b>	5.1 mil, 1-7/8" x 60 yd	24	48

### INTERTAPE BLUE PAINTERS TAPE

High quality with a special adhesive that can cleanly be removed even from glass that has been left in direct sunlight for up to 14 days. Excellent UV resistance, conformability and tensile strength.



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>TPT75</b>	Blue Painters Tape, 2" x 60 yd	24	48



## MISCELLANEOUS TAPE

## VIPER DOUBLE BOND TAPE

Double-sided butyl tape used for “double-locking” seams and as a gasket material between vapor barrier membrane and foundation walls.



SKU	DESCRIPTION	ROLLS/CASE
<b>TVPDB290</b>	2" x 90'	8

## VIPER VAPOR TAPE

White polyethylene coated film with an aggressive adhesive designed for seaming, splicing, sealing, patching and hanging vapor barrier materials.



SKU	DESCRIPTION	ROLLS/CASE
<b>TPVT4180WTP</b>	4" x 180'	12

## 3M ASJ (ALL SERVICE JACKET) TAPE UL CLASSIFIED

3M #105 ASJ insulation tape is used for seam sealing and patching of ASJ-faced mechanical insulation systems, providing a matching appearance and vapor retarder integrity.

- Service temperatures of 0°-150° F (-18°-66° C)
- Application range of 10°-120° F (-12°-49° C)



SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET
<b>00051128959978</b>	3" x 50 yd	16	27

## (E) BARRICADE CAUTION TAPE

An economical disposable marking solution manufactured for durability and resistance to the elements.



KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>TPC31000</b>	2mil "Caution" Barricade Tape—3" x 1000', 8 rls/case	1RL





# PLASTIC SHEETING



## CERTAINTED SMART MEMBRAIN™

Continuous Air Barrier & Smart Vapor Retarder. Dynamic performance and permeance rating compared to traditional kraft insulation or polyethylene sheeting.

SKU	DESCRIPTION	MIN QTY
<b>CT902008</b>	CertainTeed 8'4" x 100' Vapor Barrier	1
<b>CT902009</b>	CertainTeed 9'4" x 100' Vapor Barrier	1
<b>CT902010</b>	CertainTeed 10'4" x 100' Vapor Barrier	1
<b>CT902012</b>	CertainTeed 12'4" x 100' Vapor Barrier	1



WIDTH	SKU	DIMENSIONS	THICKNESS	COLOR
<b>4'2"</b>	<b>PF0242</b>	4'2" x 200'	2mil	Clear
<b>8'</b>	<b>PF0308</b>	8' x 100'	3mil	Clear
<b>8'</b>	<b>PF0408</b>	8' x 100'	4mil	Clear
<b>8'</b>	<b>PF0608</b>	8' x 100'	6mil	Clear
<b>8'</b>	<b>PF0608B</b>	8' x 100'	6mil	Black
<b>8'4"</b>	<b>PF15842</b>	8'4" x 200'	1.5mil	Clear
<b>8'4"</b>	<b>PF02842</b>	8'4" x 100'	2mil	Clear
<b>8'4"</b>	<b>PF0484</b>	8'4" x 100'	4mil	Clear
<b>8'4"</b>	<b>PF0484FR</b>	8'4" x 100'	4mil	Flame
<b>8'4"</b>	<b>PF0684</b>	8'4" x 100'	6mil	Clear
<b>9'</b>	<b>PF0794</b>	9' x 400'	0.7mil	Clear
<b>9'</b>	<b>PF0409</b>	9' x 100'	4mil	Clear
<b>9'</b>	<b>PF0609</b>	9' x 100'	6mil	Clear
<b>9'4"</b>	<b>PF0494</b>	9'4" x 100'	4mil	Clear
<b>9'4"</b>	<b>PF0494FR</b>	9'4" x 100'	4mil	Flame
<b>9'4"</b>	<b>PF0694</b>	9'4" x 100'	6mil	Clear
<b>10'</b>	<b>PF0210</b>	10' x 100'	2mil	Clear
<b>10'</b>	<b>PF0310</b>	10' x 100'	3mil	Clear
<b>10'</b>	<b>PF0410</b>	10' x 100'	4mil	Clear
<b>10'</b>	<b>PF0410B</b>	10' x 100'	4mil	Black
<b>10'</b>	<b>PF0610</b>	10' x 100'	6mil	Clear
<b>10'</b>	<b>PF0610B</b>	10' x 100'	6mil	Black
<b>10'4"</b>	<b>PF04104</b>	10'4" x 100'	4mil	Clear


WIDTH	SKU	DIMENSIONS	THICKNESS	COLOR
<b>12'</b>	<b>PF07124</b>	12' x 400'	0.7mil	Clear
<b>12'</b>	<b>PF035124</b>	12' x 400'	0.3mil	Clear
<b>12'</b>	<b>PF01124</b>	12' x 400'	1mil	Clear
<b>12'</b>	<b>PF015122</b>	12' x 200'	1.5mil	Clear
<b>12'</b>	<b>PF0212</b>	12' x 200'	2mil	Clear
<b>12'</b>	<b>PF0412</b>	12' x 100'	4mil	Clear
<b>12'</b>	<b>PF0412B</b>	12' x 100'	4mil	Black
<b>12'</b>	<b>PF0612</b>	12' x 100'	6mil	Clear
<b>12'</b>	<b>PF0612FR</b>	12' x 100'	6mil	Flame
<b>12'</b>	<b>PF0612B</b>	12' x 100'	6mil	Black
<b>12'4"</b>	<b>PF04124</b>	12'4" x 100'	4mil	Clear
<b>16'</b>	<b>PF0416</b>	16' x 100'	4mil	Clear
<b>16'</b>	<b>PF0616</b>	16' x 100'	6mil	Clear
<b>16'</b>	<b>PF0616B</b>	16' x 100'	6mil	Black
<b>20'</b>	<b>PF15202</b>	20' x 200'	1.5mil	Clear
<b>20'</b>	<b>PF0420</b>	20' x 100'	4mil	Clear
<b>20'</b>	<b>PF0620</b>	20' x 100'	6mil	Clear
<b>20'</b>	<b>PF0620B</b>	20' x 100'	6mil	Black
<b>20'</b>	<b>PF0620W</b>	20' x 100'	6mil	White
<b>20'</b>	<b>PF1020</b>	20' x 100'	10mil	Clear
<b>20'</b>	<b>PF1020B</b>	20' x 100'	10mil	Black
<b>24'</b>	<b>PF0624</b>	24' x 100'	6mil	Clear

## CALL 800-666-8191

## SPECIAL ORDER CONSTRUCTION FILM/POLY

We've got your next project covered—with some of the best construction film available. ADO offers a complete line of poly films available in many sizes, colors and styles.



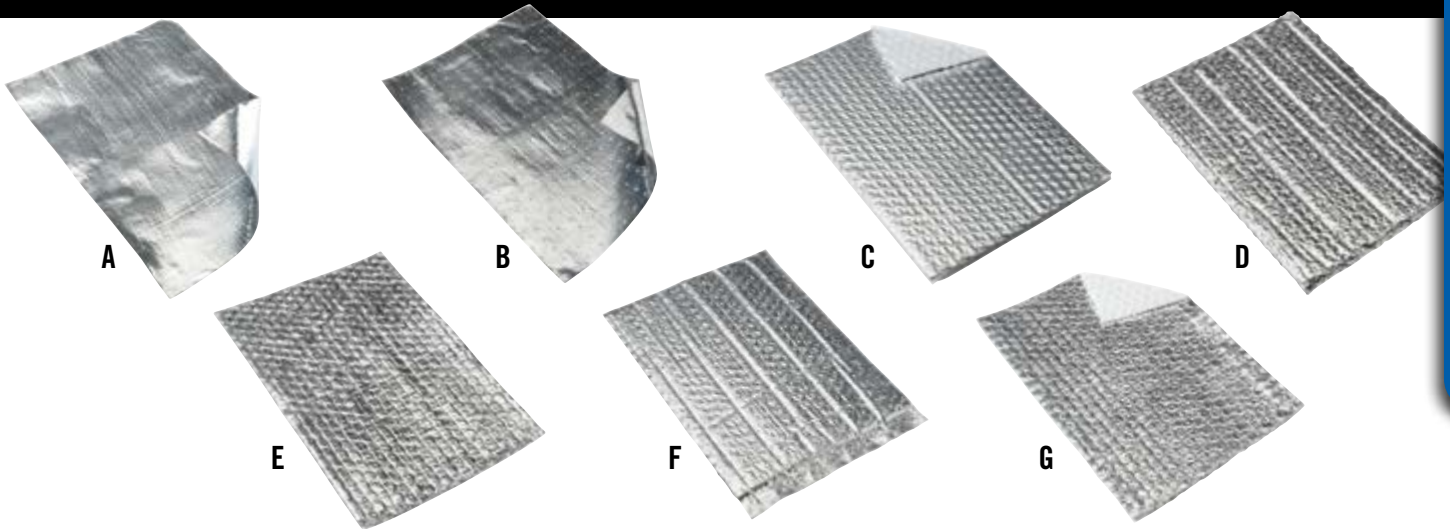

## REFLECTIVE PRODUCTS

### (A-B) R+HEATSHIELD - RADIANT BARRIERS

R+Heatshield is perfect over attic insulation (use perforated type), under rafters and over crawl spaces. It works as a complete insulation for metal and post-frame buildings, garages and garage doors. The solid type is ideal wherever a vapor and air infiltration barrier is needed. Perfectly safe to use, requiring no special breathing or handling precautions.

### (C) TUFF-STUFF - CONCRETE INSULATION

High-strength insulating moisture barrier for use below heated concrete floors.

### (D-G) ASTRO-SHIELD - REFLECTIVE INSULATION

Insulation material ideal for retrofit or new construction applications in commercial, industrial and agricultural pre-engineered metal and post-frame buildings. Its unique composite design consists of polyethylene air bubble pockets sandwiched between thin layers of reflective film. In many applications, Astro-Shield is more effective than 3" to 6" of conventional mass fiber insulation.

- Keeps buildings warmer in winter and cooler in summer
- Non-carcinogenic
- Lightweight material is thin, pliable and easy to install, and has little or no effect on building design loads
- Compact design works well in limited spaces—easy to ship/store
- Tough surfaces are wear and puncture resistant and can be pressure washed
- Water resistant, non-permeable surfaces keep moisture out
- Solid surface wind barrier absolutely stops air infiltration, adding to the energy efficiency of any building
- Class1; Class A fire rating and low smoke spread



### (A-B) R+HEATSHIELD III, SOLID OR PERFORATED RADIANT BARRIERS — FOIL/HD SCRIM/FOIL

KEY	SKU	DESCRIPTION	MIN QTY
A	AFM1SIII125	R+Heatshield III, Solid – 4' x 125'	1
B	MM5	R+Heatshield III, Perforated – 4' x 125'	1

### (C) TUFF-STUFF - CONCRETE INSULATION PET/FOIL/CLEAR BUBBLE/CLEAR BUBBLE

KEY	SKU	DESCRIPTION	MIN QTY
C	AFPTS4125	Tuff Stuff – 4' x 125';	1
	AFPTS6125	Tuff Stuff – 6' x 125'	1

### (D) ASTRO-SHIELD II - REFLECTIVE INSULATION FOIL/BUBBLE/BUBBLE/FOIL

KEY	SKU	DESCRIPTION	MIN QTY
D	ASII48125	Astro-Shield II – 4' x 125'	1
	ASII72125	Astro-Shield II – 6' x 125'	1
	ASII16125	Astro-Shield II – 16" x 125'	1

### (E) ASTRO-E - REFLECTIVE INSULATION FOIL/BUBBLE/FOIL

KEY	SKU	DESCRIPTION	MIN QTY
E	HVBWAS48125A	Astro-E – 4' x 125'	1
	AFF	Astro-E – 6' x 125'	1

### (F) ASTRO-TAB/ASTRO-PEEL & SEAL - REFLECTIVE INSULATION FOIL/BUBBLE/BUBBLE/FOIL

KEY	SKU	DESCRIPTION	MATERIAL	MIN QTY
F	AFA9PS	Astro-Peel & Seal – 4' x 125'	3/4" Release Tape, 1-Side	1
	AFAPS	Astro-Peel & Seal – 6' x 125'	3/4" Release Tape, 1 Side	1

### (G) ASTRO-WHITE - REFLECTIVE INSULATION

For ceilings in agricultural and commercial buildings including metal structures. For use as condensation barrier in heated or unheated commercial buildings, as radiant barrier in unheated commercial buildings, or as "white" facing for ceiling applications in commercial buildings. An excellent alternative to white vinyl-faced fiberglass batts.

KEY	SKU	DESCRIPTION	MATERIAL	MIN QTY
G	ASWI48125	Astro-White I – 4' x 125'	Single Bubble	1
	ASWI72125	Astro-White I – 6' x 125'	Single Bubble	1
	AFUXX4125	Astro-White II – 4' x 125'	Double Bubble	1
	AFUXX6125	Astro-White II – 6' x 125'	Double Bubble	1

## (A) FSK FACING R-3035

Lamtec R-3035 FSK (Foil-Scrim-Kraft) product is most commonly used as a facing for duct wrap insulation, but has many other insulation applications where a general use vapor retarder is needed. It is also a good choice for radiant barrier applications because of its extremely low emissivity. Permeance Test Method ASTM E 96, Procedure A - 0.02 perms.

KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
<b>A</b>	<b>BFSK503NP</b>	R-3035 FSK, 50" x 300'	1	49
	<b>R3035FSK50600</b>	R-3035 FSK, 50" x 600'	1	36
	<b>BR3035-541350</b>	R-3035 FSK, 54" x 300'	1	49
	<b>BFSK54600</b>	R-3035 FSK, 54" x 600'	1	36

## (B) PSK FACING WMP-VR

Lamtec WMP-VR is a PSK (White polypropylene film, fiberglass & polyester scrim, 11# natural kraft) vapor retarder, or facing, primarily used for metal or pre-engineered buildings. It is a very cost effective metal building facing that has an excellent installed appearance. The white film side is installed toward the interior of the building. Permeance Test Method ASTM E 96, Procedure A - 0.09 perms.

KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
<b>B</b>	<b>BWMPVR54300</b>	WMP-VR PSK, 54" x 300'	1	49
	<b>BWMPVR54600</b>	WMP-VR PSK, 54" x 600'	1	36
	<b>BWVR54600-P</b>	WMP-VR PSK, 54" x 600' – Perf.	1	36
	<b>BWMPVR66300B</b>	WMP-VR PSK, 54" x 300' – Black	1	45
	<b>BWVR6660-B</b>	WMP-VR PSK, 66" x 600' – Black	1	28

## (C) PSK FACING WMP-10

Lamtec WMP-10 is a PSK (White polypropylene film, metallization, fiberglass and polyester scrim, 14# white kraft) used in applications as a vapor retarder or facing. It is a cost effective metal building facing that has an excellent installed appearance. The white film side is installed toward the interior of the building. Permeance Test Method ASTM E 96, Procedure A - 0.02 perms.

KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
<b>C</b>	<b>BWMP10-255300</b>	WMP-10 PSK, 25.5" x 300'	1	48
	<b>WMP1033300</b>	WMP-10 PSK, 33" x 300'	1	48
	<b>BWMP10-541350</b>	WMP-10 PSK, 54" x 300'	1	49
	<b>BWMP10BLK-541350</b>	WMP-10 PSK, 54" x 300' – Black	1	49
	<b>BWMP10-661650</b>	WMP-10 PSK, 66" x 300'	1	49

## FSK VAPOR RETARDER LAMTEC R3050 (NOT SHOWN)


Lamtec R-3050 (Foil-Scrim-Kraft) product is primarily used as the facing or outer covering for fiberglass duct board, and in various insulation applications where a strong, abuse-resistant FSK vapor retarder or facing is needed. Permeance Test Method ASTM E 96, Procedure A - 0.02 perms.

KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
	<b>R3050FSK48300</b>	VR R3050 FSK, 48" x 300'	1	49

## PSK FACING WMP-50 (NOT SHOWN)

Lamtec WMP-VR is a PSK (White polypropylene film, fiberglass & polyester scrim, 11# natural kraft) vapor retarder, or facing, primarily used for metal or pre-engineered buildings. It is a very cost effective metal building facing that has an excellent installed appearance. The white film side is installed toward the interior of the building. Permeance Test Method ASTM E 96, Procedure A - 0.09 perms.


KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
	<b>BWMP5054300</b>	WMP-50 PSK, 54" x 300'	1	49
	<b>WMP5054300B</b>	WMP-50 PSK, 54" x 300' – Black	1	49
	<b>BWMP5090300</b>	WMP-50 VR PSK, 90" x 300'	1	28
	<b>BWMP5066300</b>	WMP-50 VR PSK, 66" x 300'	1	49

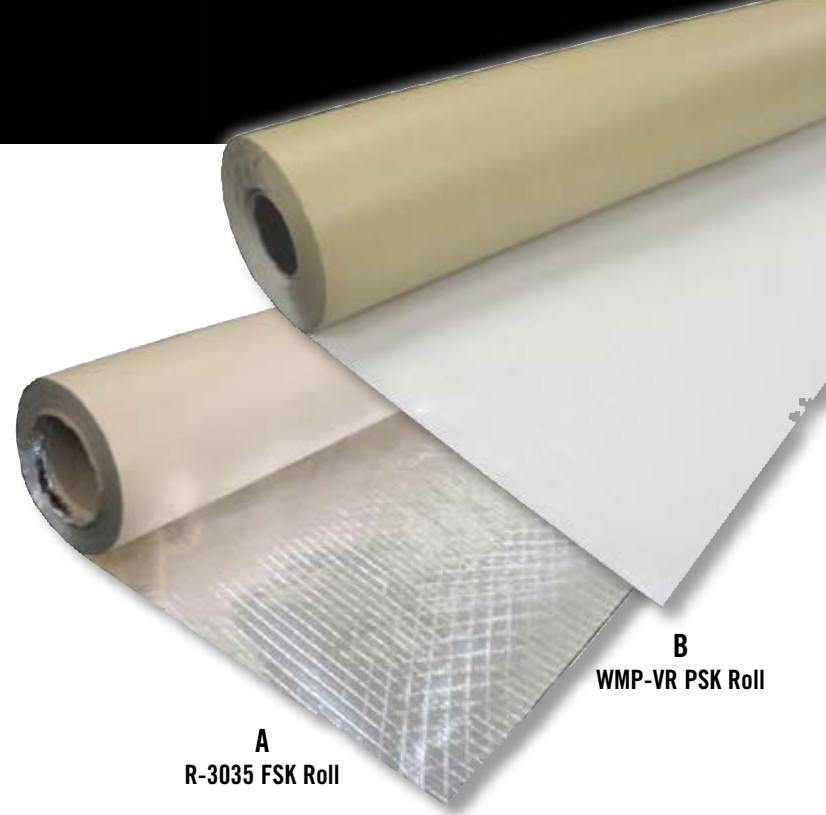

**A**  
R-3035 FSK Roll

**B**  
WMP-VR PSK Roll

# LAMTEC®



**A- R-3035 FSK Folded**



**B- WMP - VR PSK Folded**



**C- WMP-10 PSK Folded**



**D- 30-J ASJ Folded**

## (D) ASJ 30-J

Lamtec 30-J ASJ (All Service Jacket) is an aluminum foil/scrim/high intensity white kraft paper product used primarily for pipe and equipment (mechanical) insulation applications as a vapor retarder or facing. It is typically used with the white paper side exposed. Permeance Test Method ASTM E 96, Procedure A - 0.02 perms.

KEY	SKU	DESCRIPTION	MIN QTY	ROLLS/PALLET
<b>D</b>	<b>30JASJ48300</b>	30J ASJ, 48" x 300'	1	49





### (A) ECONOMY 1" X 2" MESH

A great replacement for wire batt hangers!

KEY	SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET	MIN QTY
A	ISNET4250Y	4' x 250'	20	4	1

### (B) LIGHT DUTY 1/6" MESH


Works well for walls when installing cellulose or fiberglass, as a backer to hold wet spray, and as a temporary face before installing drywall.

KEY	SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET	MIN QTY
B	ISNET4250	4' x 250'	16	4	1
	ISNET1696125	8' x 125'	16	4	1
	ISNET162250	2' x 250'	32	4	1

### (C) MEDIUM DUTY 1/4" MESH


A heavier choice where greater strength is required and for fireproofing spray applications.

KEY	SKU	DESCRIPTION	ROLLS/CASE	CASES/PALLET	MIN QTY
C	ISNET48250	4' x 250'	9	4	1
	ISNET148125F	8' x 125'	9	4	1
	ISNET111250	111" x 250'	4	8	1
	ISNET120250	120" x 250'	4	8	1

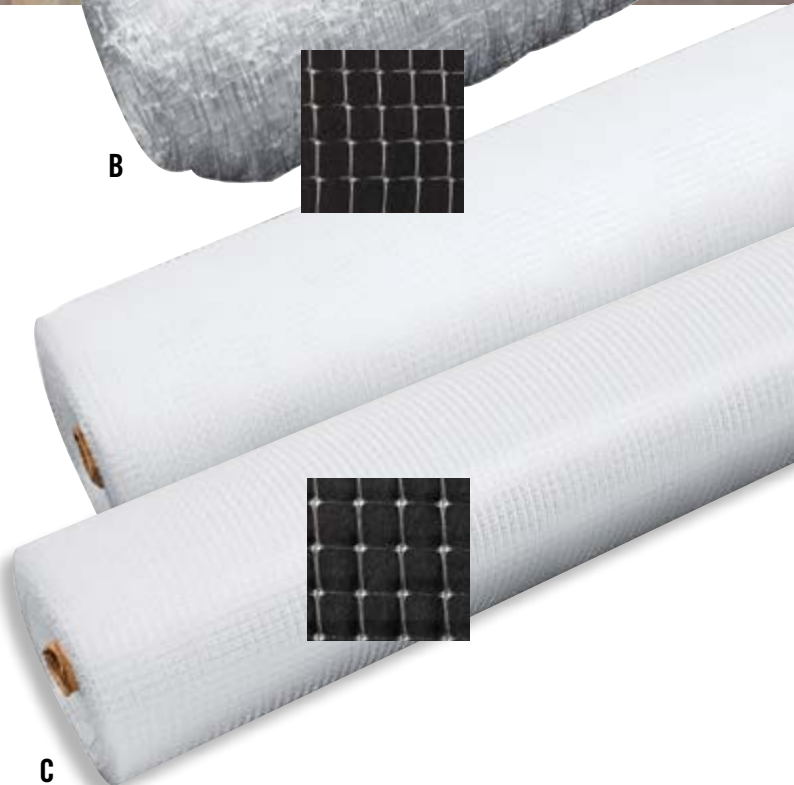



**A**

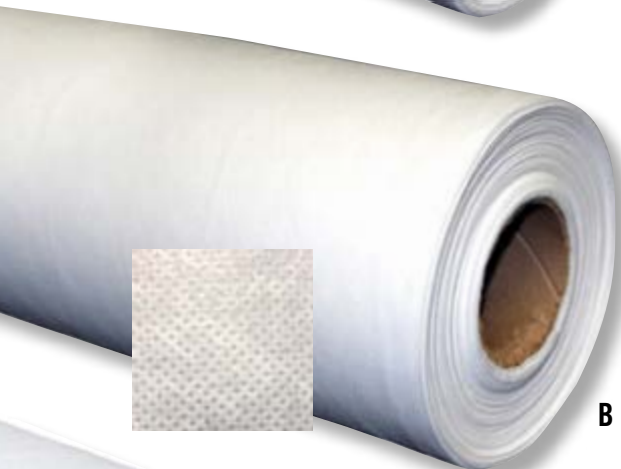

**B**



**C**



**D**

## (A) ADO PRO PAC

ADO Pro Pac fabric is ideal for knee walls, sound walls and many other applications. Keep your job site dust levels down to a minimum. Our best value, high quality non-woven netting is made of 100% polypropylene point bonded material. Rolls are folded for greater convenience when moving quickly through the job site installation. ADO Pro Pac is not the preferred fabric for wet/damp spray installations - See line (D) ADO Pro Web SKUs for this application.

KEY	SKU	DESCRIPTION	ROLLS/BAG	BAGS/PALLET	BAGS/PALLET
<b>A</b>	<b>ICPP50</b>	Pro Pac, 4'2" x 750'	1	12	1
	<b>FICPP100375</b>	Pro Pac, 8' 4" x 375', Folded	1	12	1
	<b>ICPP110375</b>	Pro Pac, 9'2" x 375', Folded	1	12	1
	<b>BRWFPKF102750</b>	Pro Pac, 10'2" x 375', Folded	1	12	1

## (B) ADO FLO WALL

ADO Flo Wall (Basis weight 1.66 oz per sq yard) fabric is ideal for knee walls, ceilings, sound walls and many other applications. Made of 100% polyester.

KEY	SKU	DESCRIPTION	ROLLS/BAG	BAGS/PALLET	MIN QTY
<b>B</b>	<b>FW4375</b>	Flo Wall, 4' x 375'	1	12	1
	<b>FW8375</b>	Flo Wall, 8' x 375', Folded	1	12	1
	<b>FW9375</b>	Flo Wall, 9' x 375', Folded	1	12	1
	<b>FW10375</b>	Flo Wall, 10' x 375', Folded	1	12	1

## (C) ADO PRO WALL 50 PLUS

ADO Pro Wall 50 (Basis Weight 1.5 oz per sq yard) fabric is ideal for knee walls, ceilings, sound walls and many other applications. ADO Pro Wall 50 passes ASTM E84. Made from 100% polyester which has a low propensity for mold growth verses polypropylene.

KEY	SKU	DESCRIPTION	ROLLS/BAG	BAGS/PALLET	MIN QTY
<b>C</b>	<b>PW504375</b>	Pro Wall 50 Plus, 4' x 375'	1	18	1
	<b>PW508375</b>	Pro Wall 50 Plus, 8' x 375', Folded	1	12	1
	<b>FPW509375</b>	Pro Wall 50 Plus, 9' x 375', Folded	1	12	1
	<b>PW5010375</b>	Pro Wall 50 Plus, 10' x 375', Folded	1	12	1


## (D) ADO PRO WEB

Our premium grade non-woven netting made of 100% polypropylene. Ideal for wet/damp spray installations. The 8', 9' and 10' rolls are folded.

KEY	SKU	DESCRIPTION	ROLLS/BAG	BAGS/PALLET	MIN QTY
<b>D</b>	<b>IW4375</b>	Pro Web, 4' x 375'	1	30	1
	<b>IW8375F</b>	Pro Web, 8' x 375', Folded	1	12	1
	<b>IW9375F</b>	Pro Web, 9' x 375', Folded	1	12	1
	<b>BPW120375-F</b>	Pro Web, 10' x 375', Folded	1	12	1





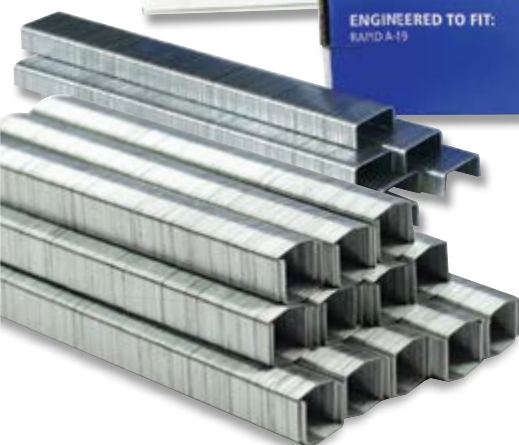

### CONTRACTOR GRADE GALVANIZED STAPLES

Consistent quality that prevents jamming or breakage (no chicklets). Our staples are engineered to fit B&C Eagle, Fasco, Josef Kihlberg, Bostitch, Paslode, Rapid, Arrow, and Prebena staplers.



SKU	DESCRIPTION	LEG LGTH	CROWN	FITS	QTY/BOX	BOXES/CASE	CASES/PALLET
ADB1950	STCR261906	1/4"	1/2"	H30-6	5M	50	48
ADB2000	STCR261908	5/16"	1/2"	H30-6	5M	50	48
ADB5000	STCR261910	3/8"	1/2"	H30-6	5M	50	48
ADB2250	STCR501906	1/4"	7/16"	H30-8, HTPC2K	5M	20	48
ADB2500	STCR501910	3/8"	7/16"	H30-8, HTPC2K	5M	20	48
D3575	DF5008	1/4"	1/2"	1013292, F1A50, SF5016LMA	5M	20	64
30820	DF5010	5/16"	1/2"	1013292, SF5016LMA	5M	20	64
J6000	No. 7	1/4"	3/8"	AM20670ALMJK, F1A7C, SF7116LMA	10M	20	48
J6225	No. 7	5/16"	3/8"	AM20670ALMJK, SF7116LMA	10M	20	48
K7000	No. 8	5/16"	1/2"	AM20680ALMJK, F1A80, SF8016LMA	10M	20	48
K7250	No. 8	1/2"	1/2"	AM20680ALMJK, SF8016LMA	6M	20	60
R4575	RA1906	1/4"	3/8"	20726010	5M	50	48
RA1026	RA11	1/4"	3/8"	HTA11GEN, T-50, SF1116LMA	5M	20	64
RA1008	RA11	5/16"	3/8"	HTA11GEN, T-50, SF1116LMA	5M	20	64
RA1010	RA11	3/8"	3/8"	HTA11GEN, T-50, SF1116LMA	5M	20	64
ADA1650	A11-2	1/2"	3/8"	T-50, SF1116LMA	5M	20	64

A



B



### (A) GENUINE BOSTITCH® STAPLES

High quality, light duty PowerCrown™ galvanized staples, with blunt chisel-point.

KEY	SKU	DESCRIPTION	FITS	QTY/BOX	BOXES/CASE	CASES/PALLET
A	079055261902	Bostitch STCR261908 – 5/16"	H30-6	5M	20	112


### (B) GENUINE PASLODE® STAPLES – 5000 SERIES

Wide crown fine wire staples are high quality, chisel-point. Galvanized.

KEY	SKU	DESCRIPTION	FITS	QTY/BOX	BOXES/CASE	CASES/PALLET
B	SF501008	Paslode DF5010 – 5/16"	1013292	5M	20	36
	SF50806	Paslode DF5008C – 1/4"	1013292	5M	20	36



# STAPLES & TACKERS

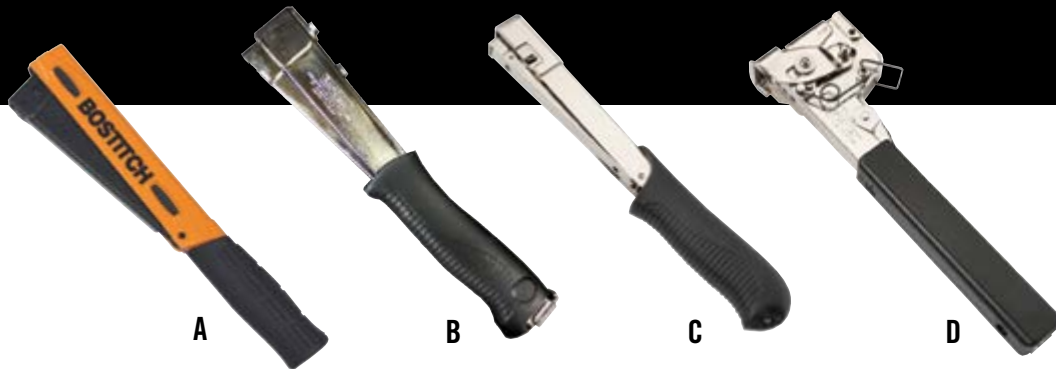

## (A) STANLEY BOSTITCH

The H30-6 and the H30-8 PowerCrown™ staplers feature a compact, powerful design and quick-load magazines. The H30-6 uses thinner fine wire staples and the H30-8 uses thicker medium wire staples. The H30-6 can be fitted with 1/4", 5/16" or 3/8" staples and the H30-8 with 1/4" or 3/8" staples.

KEY	SKU	DESCRIPTION	TACKERS/CASE	MIN QTY
A	H30-6	Bostitch H30-6	6	1
	H30-8	Bostitch H30-8	6	1

Refer to schematics on page 68.

## (B-C) RAPID

- A-11 – Easy-to-load and operate All-steel construction, and can be fitted with 1/4", 5/16" or 3/8" staples
- A-19 – Smaller, disposable version offering the most economical tacker/staple combination on the market and can be fitted with 1/4" staples.


KEY	SKU	DESCRIPTION	TACKERS/CASE	MIN QTY
B	HTA11GEN	Rapid A-11	10	1
C	20726010	Rapid A-19	10	1

## (D) PASLODE®

The HT-550 Classic features durable construction and two-strip staple capacity. Can be fitted with 1/4" or 5/16" staples.

KEY	SKU	DESCRIPTION	TACKERS/CASE	MIN QTY
D	1013292	Paslode HT-550 Classic	5	1

Refer to schematics on page 68.

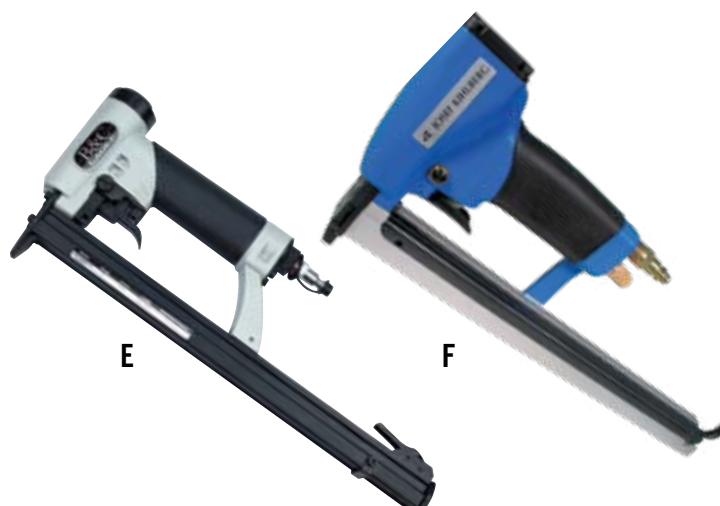

## (E-F) B&C EAGLE AND JOSEF KIHLEBERG

Lightweight Pneumatic tools designed for applying netting and roofing felt. Up to 1700 staples per minute. Easily adjusts to operator preferences. Double-length magazine provides large load capacity.

**Note:** All B&C Eagle and Josef Kihlberg pneumatic staplers will need a Milton plug, male—1/4".

KEY	SKU	DESCRIPTION	STAPLES USED	MIN QTY
E	SF7116LMA	Pneumatic Auto-Fire, J Series	J6000, J6225	1
	SF8016LMA	Pneumatic Auto-Fire (80 series), K Series	K7000, K7250	1
	SF5016LMA	Pneumatic Auto-Fire, D Series	D3575, 30820, SF501008	1
	SF1116LMA	Pneumatic Auto-Fire, RA Series	RA1026, RA1008, RA1010, ADA1650	1
F	AM20670ALMJK	Josef Kihlberg JK670L, Auto-Fire	J6000, J6225	1
	AM20680ALMJK	Josef Kihlberg, JK680L, Auto-Fire	K7000, K7250	1



## (G) AIR HOSES

Contractor's Choice reinforced polyurethane air hose. Lightweight—only 3.69 lbs for a 100' hose. Tough reinforced polyurethane—250 psi. Won't kink, twist or crush—flexible down to -40°F. Sold as pre-made assemblies with reusable fittings. Couplers, connectors, reusable ends for mending sold separately.

KEY	SKU	DESCRIPTION	MIN QTY
G	PUR14X50	Air Hose with Reusable Ends – 1/4" x 50'	1
	PUR38X50	Air Hose with Reusable Ends – 3/8" x 50'	1

Note: 1/4" and 3/8" hoses have 1/4" male NPT hose ends.



## (H) PNEUMATIC TOOL ACCESSORIES

KEY	SKU	DESCRIPTION	MIN QTY
H	SPSFJK733007	Air Tool Oil – 8oz Bottle	1



## (A) MARK II HOSE

The industry standard. Lightweight polyethylene hose features abrasion-resistant crown and translucent ribbed walls for easy monitoring of material flow. Durable and economical. Interior walls are designed to fluff material.

KEY	SKU	DESCRIPTION	MIN QTY
A	TLH15-MK2	Mark II Clear Hose – 1-1/2" x 50'	1
	TLH20-MK2	Mark II Clear Hose – 2" x 50'	1
	MK2510	Mark II Clear Hose – 2-1/2" x 10'	1
	TLH25-MK2	Mark II Clear Hose – 2-1/2" x 50'	1
	TLH30-MK2	Mark II Clear Hose – 3" x 50'	1
	TLH35-MK2	Mark II Clear Hose – 3-1/2" x 50'	1
	TLH40-MK2	Mark II Clear Hose – 4" x 50'	1

NOTE: Measurements are the inside diameter of the hose.

## (B) MARK E-2 HOSE

A perfect lightweight hose that combines the wire reinforced strength of the Urethane Flexible style hoses, constructed out of Polyethylene material like the industry standard Mark II style hoses. The clear E-2 style hose with a spring steel wire helix provides efficient flow characteristics and is abrasion resistant. The maximum negative pressure rating for vacuuming applications far exceeds the ratings of the Mark II style hose and is equivalent to that of the Urethane Flexible style hoses.

KEY	SKU	DESCRIPTION	MIN QTY
B	TLH625FLX-TRE2	Clear E-2 Flex Hose – 6" x 25'	1

NOTE: Measurements are the inside diameter of the hose.

## (C) URETHANE FLEX HOSE

Very lightweight clear polyurethane hose reinforced with a spring steel wire helix that provides excellent flexibility. The smooth bore offers a combination of efficient flow characteristics and abrasion resistance. Moisture resistant, temperature range -65° F to 200° F.

KEY	SKU	DESCRIPTION	MIN QTY
C	TOOLFTH2	Clear Urethane Flex Hose – 2" x 50'	1
	TOOLFTH25	Clear Urethane Flex Hose – 2-1/2" x 50'	1
	TOOLFTH3	Clear Urethane Flex Hose – 3" x 50'	1
	TOOLFTH35	Clear Urethane Flex Hose – 3-1/2" x 50'	1
	TOOLFTH4	Clear Urethane Flex Hose – 4" x 50'	1
	TOOLFTH6025	Clear Urethane Flex Hose – 6" x 25'	1

NOTE: Measurements are the inside diameter of the hose.



D

## (D) FLEX TUBE HOSES

Medium weight clear co-extruded elastomer with a rigid green or blue external polypropylene helix that serves as a wear strip. Spiral co-extruded engineered construction with environmentally friendly PVC. Ultra smooth interior assures efficient airflow. Good chemical and abrasion resistance.

KEY	SKU	DESCRIPTION	MIN QTY
D	TLH450FTEFGH	Flex-Tube EF 4" x 50' – Clear w/ Colored Helix	1
	TLH625FTEFGH	Flex-Tube EF 6" x 25' – Clear w/ Colored Helix	1
	TLH825FTEFGH	Flex-Tube EF 8" x 25' – Clear w/ Colored Helix	1

## (E) WALL TUBING

Wall tubing attaches to the tip of a reducing nozzle, allowing the hose to be fed into a wall cavity and then pulled out as the wall cavity fills up with insulation.

KEY	SKU	DESCRIPTION	MIN QTY
E	BT-100	1" ID, 1-1/4" OD	10'
	TLH11.25	1-1/4" ID, 1-1/2" OD	10'
	BT-150	1-1/2" ID, 2" OD	10'
	BT-200	2" ID, 2-1/2" OD	10'

E

## (F) KRENDL FLEX-THANE HOSE (NOT PICTURED)

KEY	SKU	DESCRIPTION	MIN QTY
	BLO-H460-1	Flex-Thane LD, Krendl – 8" x 1'	1




# BLOWING ACCESSORIES

## (A-B) INTEC HOSE REELS

Simplify your blow & vacuum hose storage with lightweight and tough hose reels by Intec. Featuring an exclusive adjustable bearing tensioner system so you can set the rolling speed to fit your needs. The tensioner also acts as a brake to keep your hose from unrolling.

REEL	3"	3.5"	4"	6"	8"
BLO-TM3110-STD	300'	250'	200'	100'	50'
BLO-TM3110-LG	500'	450'	350'	150'	100'

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>BLO-TM3110-STD</b>	Standard Hose Reel, 29"w x 54"d x 56"h, 61lbs	1
<b>B</b>	<b>BLO-TM3110-LG</b>	Large Hose Reel, 32"w x 66"d x 68"h, 64lbs	1

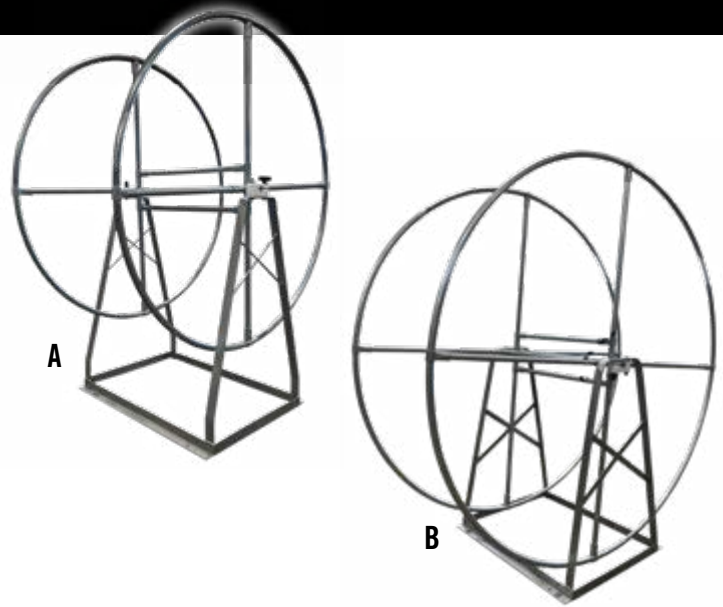

## (C) STEEL CONNECTORS

Provide durable, secure links between hose sections. Inside extensions are long enough to safely attach clamps for secure fits.



KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>TOOLSC200</b>	Steel Connector – 2"	1
	<b>TOOLSC250</b>	Steel Connector – 2-1/2"	1
	<b>TOOLSC300</b>	Steel Connector – 3"	1
	<b>TOOLSC350</b>	Steel Connector – 3-1/2"	1
	<b>TOOLSC400</b>	Steel Connector – 4"	1
	<b>TOOLSC600</b>	Steel Connector – 6"	1

## (D) HOSE REDUCERS

Transition down to a smaller hose size quickly, easily, and securely with this hose reducers.



KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>BLO-357</b>	Steel Reducer – 2-1/2" to 2"	1
	<b>RC320</b>	Steel Reducer – 3" to 2"	1
	<b>KR359</b>	Steel Reducer – 3" to 2-1/2"	1
	<b>RC-352</b>	Steel Reducer – 3-1/2" to 2-1/2"	1
	<b>RC353</b>	Steel Reducer – 3-1/2" to 3"	1
	<b>TLHRD4030</b>	Steel Reducer – 4" to 3"	1
	<b>RC435</b>	Steel Reducer – 4" to 3-1/2"	1
	<b>BLO-J52035</b>	Steel Reducer – 6" to 4"	1
	<b>BLO-681P-BLK</b>	Plastic Reducer – 8" to 6", Black (Not Pictured)	1

## (E) POLYPROPELENE SWIVEL CONNECTORS

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>CN0011</b>	2" Straight Swivel Hose Connector	1
	<b>CN0013</b>	3" Straight Swivel Hose Connector	1
	<b>CN0014</b>	4" Straight Swivel Hose Connector	1



## (F) INTEC SWIVEL CONNECTORS

Swivel hose connectors can be used for blowing or vacuum applications. They provide the installer freedom and agility to move around by reducing tangles and kinks in the hose.



KEY	SKU	DESCRIPTION	MIN QTY
<b>F</b>	<b>BLO-J52053</b>	3" Straight Swivel Hose Connector	1
	<b>BLO-J52058</b>	4" Straight Swivel Hose Connector	1
	<b>BLO-J52054</b>	6" Straight Swivel Hose Connector	1

## (G) HOSE CLAMPS

Steel clamps with worm drive adjust to fit 2", 2-1/2", 3", 3-1/2", 4", 6", or 8" connectors, reducers or nozzles.



KEY	SKU	DESCRIPTION	MIN QTY
<b>G</b>	<b>BLO-339A</b>	Hose Clamp – 2" to 3"	1
	<b>BLO-340</b>	Hose Clamp – 4"	1
	<b>BLO-341</b>	Hose Clamp – 6"	1
	<b>BLO-4000-38</b>	Hose Clamp, Krendl – 8"	1

## DRY-SPRAY NOZZLES

### (H-L) DRY-SPRAY NOZZLES

We offer a wide variety of sizes and types of steel nozzles.

KEY	SKU	DESCRIPTION	MIN QTY
<b>H</b>	<b>RN-210</b>	Steel Reducing Nozzle – 2" to 1"	1
	<b>RN214</b>	Steel Reducing Nozzle – 2" to 1-1/4" (not shown)	1
	<b>TLHRD2015</b>	Steel Reducing Nozzle – 2" to 1-1/2" (not shown)	1
<b>I</b>	<b>362P</b>	Plastic Reducing Nozzle – 2" to 1" or 1-1/2"	1
<b>J</b>	<b>BN-2100</b>	Brick Reducing Nozzle – 2" to 5/8"	1
<b>K</b>	<b>DS-201</b>	Directional Swivel Nozzle – 2"	1
	<b>DS-251</b>	Directional Swivel Nozzle – 2-1/2"	1
	<b>DS-252</b>	Directional Swivel Reducer – 2-1/2" to 2"	1
<b>L</b>	<b>UDN200</b>	Directional Nozzle – 2"	1
	<b>DS-250</b>	Directional Nozzle – 2-1/2"	1





## (A) MP-20 PUMP AND MOTOR

High quality, double belt-driven pump with 1 HP TEFC motor offers easy, reliable operation. Ideal for the entry level contractor as well as the professional contractor.

Max. Flow: 5.7 gpm. Max. Pressure: 180 psi. Max. Speed: 650 rpm.

KEY	SKU	DESCRIPTION	MIN QTY
A	BLO-WS120	MP-20 Pump and Motor	1

## (B) M-3 PUMP AND MOTOR

Economical direct-drive, self-priming, triple diaphragm pump with a 1 HP TEFC motor. Ideal for the entry level contractor as well as the professional contractor.

Max. Flow: 3 gpm. Max. Pressure: 300 psi. Max. Speed: 1,725 rpm.

KEY	SKU	DESCRIPTION	MIN QTY
B	348D-60	M-3 Pump and Motor	1

## (C) WATER HOSE

KEY	SKU	DESCRIPTION	MIN QTY
C	BLO-447-1	Water Hose – 3/8" x 150' (300psi max)	1

## (D) KRENDL 2-JET WET-SPRAY WALL CAVITY NOZZLES

Wide oval discharge allows for maximum flow of coarse, wet, recycled fibers without plugging. Rigid attachment of spray tip body to internally machined head eliminates misalignment and nuisance pressure tubing leaks caused by frequent accidental impacts. Quick-connect tips sold separately—QD202, #2502 standard.

KEY	SKU	DESCRIPTION	MIN QTY
D	BLO-349WC2-2-M	Krendl 2-Jet Nozzle – 2"	1
	WS252W	Krendl 2-Jet Nozzle – 2-1/2"	1
	349WC3	Krendl 2-Jet Nozzle – 3"	1

**NOTE:** Please consult your Insulation Account Manager for additional specifics on wet spray nozzle tips. Requirements vary by insulation manufacturer.


## (E-F) KRENDL WET-SPRAY TIPS – BRASS QUICK-CONNECT

KEY	SKU	DESCRIPTION	MIN QTY
E	BLO-W-5C	Base Adapter	1
F	BLO-QVVA2501	#2501 – Brass, Quick Connect	1
	QVVA25015	#25015 – Brass, Quick Connect	1
	QVVA2502	#2502 – Brass, Quick Connect	1
	QVVA2503	#2503 – Brass, Quick Connect	1
	BLO-QVVA4001	#4001 – Brass, Quick Connect	1
	BLO-QVVA40015	#40015 – Brass, Quick Connect	1
	BLO-QVVA4002	#4002 – Brass, Quick Connect	1

## (G-H) KRENDL 4-JET AND 6-JET WET-SPRAY COMMERCIAL NOZZLES

Narrow, flat orifice increases dispersing, velocity, and impact of fiber. This will maintain a flat, smooth flowing spray pattern which will fully encapsulate the fibers. Stainless steel, screw-in style tips #4002 standard, sold separately.

KEY	SKU	DESCRIPTION	MIN QTY
G	BLO-WS204C	Krendl 4-Jet Commercial Nozzle – 2"	1
	WS254C	Krendl 4-Jet Commercial Nozzle – 2-1/2"	1
H	BLO-WS256C	Krendl 6-Jet Commercial Nozzle – 2-1/2"	1

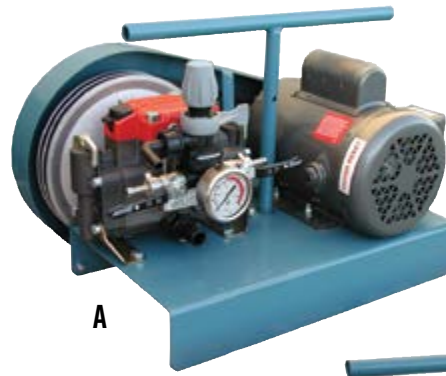

A



B



C



D



E

Krendl Wet-Spray Tips  
Base adapter



F

Krendl Wet-Spray Tips  
Brass Quick-Connect



G



H



I

Krendl Wet-Spray Tips  
Stainless Steel Screw-In

## (I) KRENDL WET-SPRAY TIPS – STAINLESS STEEL SCREW-IN

KEY	SKU	DESCRIPTION	MIN QTY
I	WS301	#1501 – Stainless, Screw In	1
	WS303	#4001 – Stainless, Screw In	1
	WS300	#4002 – Stainless, Screw In	1

# BLOWING ACCESSORIES

A



B



C



D



E



## (A) GRAPHITE POWDER

Reduces static electricity and friction. Occasionally blend one or two cans with cellulose and run through the blower and hose.

KEY	SKU	DESCRIPTION	QTY/CASE	MIN QTY
A	PG-430	Graphite Powder – 16oz	12	1

## (B) ATTIC R-VALUE RULERS

Highly visible attic rulers are printed on one side and measure up to 24" of insulation.

KEY	SKU	DESCRIPTION	QTY/BOX
B	RT240	24" R-Value Rulers	250

## (C-D) KRENDL STUD SCRUBBERS

120Vac, 1/8 HP TEFC motor, belt-driven rubber rollers with tensioners. Used to remove excess spray-on insulation between wall studs, allowing for easy installation of drywall. The 27" wide scrubber is for use on 24" OC, the 18" width for 16" OC. Works well in closets or congested areas.

KEY	SKU	DESCRIPTION	MIN QTY
C	BLO-KS160	Krendl Stud Scrubber – 18"	1
	BLO-349BP27LS-AL	Krendl Stud Scrubber – 27"	1
D	KS290	Krendl Stud Scrubber – 18" w/ 30" Extension	1
	349BP27LE-AL	Krendl Stud Scrubber – 27" w/ 30" Extension	1

## KRENDL STUD SCRUBBER PARTS

KEY	SKU	DESCRIPTION	MIN QTY
	BLO-WSR-B	18" Roller Assembly	1
	WSR-A	27" Roller Assembly	1
	BLO-WS-27SET	27" Belting (2 per set)	1
	BLO-WS-18SET	18" Belting (2 per set)	1
	WS-1A-R1	Scrubber Motor	1
	BLO-WS-13	27" V-Belt	1
	BLO-WS-13A	70" V-Belt for 30" Extension	1

## (E) INTEC SCRUBBER FORCE®

When needing to remove excess wall spray from new construction stud cavities to allow for drywall installation, consider the scrubber Force. Intec's scrubber FORCE wall scrubber quickly and effectively removes excess cellulose or fiberglass from damp spray operations. Use with both 16" OC and 24" OC construction. Weighs only 13lbs!

KEY	SKU	DESCRIPTION	MIN QTY
E	BLO-75400-XC27	27" Wall Scrubber	1
	BLO-75420-00	27" V-Belt	1
	BLO-75430-10	Scrubber Force Fiberglass Roller Assembly	1
	BLO-75430-00	Scrubber Force Cellulose Roller Assembly	1





## (A) KRENDL 425 BLOWING MACHINE

The Krendl 425 is designed for low maintenance, rugged performance, and portability. Provides large hopper capacity with user friendly controls.

### Specifications:

- Light weight machine: 220 lbs
- User friendly electric panel
- Hopper capacity: 7 Cubic ft.
- 2.5" Outlet
- Power requirements:  
Single input: 15 AMP, 120 volt/60hz  
Double input: 15/15 AMP, 120 volt/60hz
- Output: Fiberglass: 200 lbs/hour (8 AMP Blower),  
480 lbs/hour (14 AMP Blower)  
Cellulose: 1100 lbs/hour (8 AMP Blower)  
1400 lbs/hour (14 AMP Blower)

### • Power cords not included

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
A	KM425	Krendl 425, Single Input, 8amp Blower	220
	BLO-425B	Krendl 425, Double Input, 14amp Blower	220

\*Power cords not included.

## (B) KRENDL 475 BLOWING MACHINE

The Krendl 475 is an economical machine for professional contractors. Designed for low maintenance and high production, the 475 provides a large easy loading hopper while offering simple rugged performance.

### Specifications:

- Double 14 Amp / 2-stage blowers
- Clear acrylic safety guard for easy inspection
- LED start and stop buttons and Digital voltmeter
- Dual variable blower controls
- 3" Outlet
- Semi pneumatic run flat treaded tire
- Hopper capacity: 14 Cubic ft.
- Power requirements:  
Double input: 15/15 AMPs each, 120 volt/60hz
- Output: Fiberglass: 700 lbs/hour  
Cellulose: 2100 lbs/hour

### • Power cords not included

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
B	BLO-475DL	Krendl 475, Double Input	355

\*Power cords not included.

## (C) KRENDL 575 BLOWING MACHINE

The Krendl 575 provides the highest production in its class for all brands of cellulose and fiberglass. Designed with the professional contractor in mind, the 575 will outperform and outlast the competition.

### Specifications:

- Lightest machine in its class
- User-friendly electronic dashboard
- Double 14 Amp / 2-stage blowers
- Clear acrylic safety guard for easy inspection
- LED start and stop buttons
- Dual variable blower controls
- Digital voltmeter
- Semi-pneumatic run flat treaded tires
- Hopper capacity: 14 Cubic ft.
- 3" Outlet
- Power requirements:  
Double input: 30/15 AMPs each, 120 volt/60hz  
Single input: 30 AMP, 240 volt/60hz
- Output: Fiberglass: 800-1000 lbs/hour  
Cellulose: 2600-2800 lbs/hour

### • Power cords not included

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
C	BLO-575A	Krendl 575, Double Input, 15amp Blower	380
	BLO-575B	Krendl 575, Single Input	380

\*Power cords not included.

## POWER CORDS

Heavy duty, all weathered extension cords with twist plugs for use with Krendl Blowing machines.

MACHINE	50' CORD OPTION	100' CORD OPTION
325	(1) BLO-EXTCORD-A	(1) BLO-EXTCORD-B
425SI	(1) BLO-EXTCORD-A	(1) BLO-EXTCORD-B
425 DI	(2) BLO-EXTCORD-A	(2) BLO-EXTCORD-B
475 DI	(2) BLO-EXTCORD-A	(2) BLO-EXTCORD-B
575 DI	(1) BLO-EXTCORD-A (1) BLO-EXTCORD-L	(1) BLO-EXTCORD-B (1) BLO-EXTCORD-M
575, FG1100, 1300, 2300 SI	(1) BLO-EXTCORD-G	(1) BLO-EXTCORD-H
FG1100, 1300, 2300 DI	(1) BLO-EXTCORD-C (1) BLO-EXTCORD-D	(1) BLO-EXTCORD-E (1) BLO-EXTCORD-F
2300-4BLR	(1) BLO-EXTCORD-I	(1) BLO-EXTCORD-J



BLOWING MACHINES



(A) KRENDL 2300 BLOWING MACHINE


Specifically designed for contractors to provide a smaller footprint while capable of blowing all brands of cellulose and fiberglass.

Specifications:

- User-friendly electronic dashboard
- 2 HP direct drive motor/reducer
- Hopper capacity: 40 Cubic ft.
- Power requirements:  
Double input: 30/20 AMPs each, 120 volt/60hz  
Single input: 30 AMP, 240 volt/60hz
- Output: Fiberglass:1000 lbs/hour  
Cellulose: 3000 lbs/hour
- **Power cords not included**
- Double blower system
- Slide Out Airlock system
- Clear acrylic safety guard allows for easy inspection
- Built in tool holder
- 3" Outlet

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
A	BLO-2300	Krendl 2300-E, Double Input	846
	BLO-2300B	Krendl 2300-B, Single Input	846

\*Power cords not included.

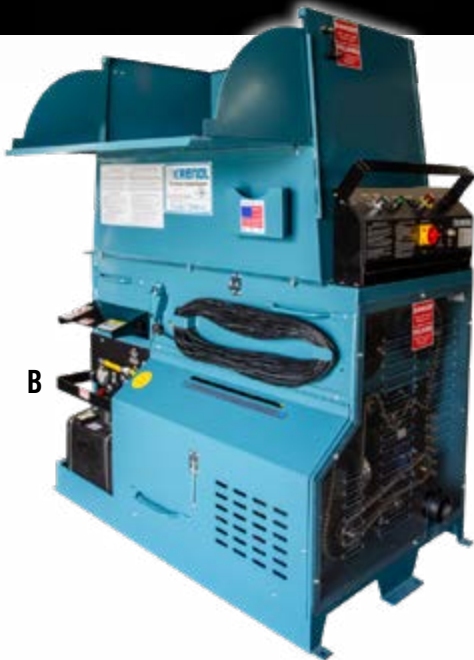

(B) KRENDL 2800-G BLOWING MACHINE

Specifically designed for contractors to provide a smaller footprint while capable of blowing all brands of cellulose and fiberglass.

Specifications:

- Removable all steel airlock allows quick access for maintenance
- 18 HP Briggs & Stratton V-Twin gas engine w/positive pressure lubrication system
- User-friendly 12V DC electric dashboard
- 5 gallon fuel tank
- Clear acrylic safety guard allows for easy inspection
- 3" Outlet
- Hopper capacity: 40 Cubic ft.
- Output: Fiberglass: 2100 lbs/hour  
Cellulose: 3600 lbs/hour
- **Power cords not included**

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
B	BLO-2800G	Krendl 2800-G, Gas Powered	1224

\*Power cords not included.



(C) KRENDL 4000-G-A

Maximize your production with your 4000-G-A all fiber machine. Designed for low maintenance and high production, the 4000-G-A with its additional agitation provides a large, easy loading hopper with adaptable fold-down folding door while offering simple rugged performance. Durable powder coat finish.

Specifications:

- Removable all steel airlock allows quick access for maintenance
- User-friendly 12 VDC electric dashboard
- Control panel with engine controls, pressure gauge and air bleed off
- 4.75 gallon fuel tank w/emergency shut off
- Hopper capacity: 62 Cubic ft.
- Positive Displacement Blower
- 4" Outlet
- Output: Fiberglass: 2200 lbs/hour  
Cellulose: 4800 lbs/hour
- **Power cords not included**

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
C	BLO-4000G	Krendl 4000-G-A, Gas Powered	1684

\*Power cords not included.



A



B



C

## (A) FIBERFORCE TALL HOPPER W/ACCESSORIES

The ultimate machine for portability provides installers a compact machine with a detachable hopper for ease of transporting. Wireless remote, 1-15 amp circuit for complete operation.

### Specifications:

- Hose - 2-1/2" x 50' (included)
- Wireless remote (range) - 250' (included)
- Gear motor - .38 HP @ 82 RPM
- Gear motor torque - 296 in/lb
- Blower (single stage) - 145 cfm / 2.8 psi
- Electrical - 115 VAC @ 14 amps 1610 Watts
- Power cord, type SJO (twist lock) - 14/3 x 50' (included)
- 2.5" Outlet
- Output:  
Cellulose: 1,050 lbs/hr  
Fiberglass: 400 lbs/hr  
Results vary by manufacturer

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
A	BLO-50013-00	FiberForce Tall Hopper w/ Accessories	245

## (B) FORCE/2 HIGH POWER NEXT GENERATION

The ultimate machine for portability provides installers a compact machine with a detachable hopper for ease of transporting. Wireless remote, 1-15 amp circuit for complete operation.

### Specifications:

- Dimensions - 30.25"D x 44.75"H
- Remote Cord - 18/4 x 100'
- Optional Wireless remote - Up to 250'
- Hopper Capacity - 9 cu. ft.
- Optional Hopper Ext - 13 cu. ft.
- Transmission - Custom, Direct drive
- Airlock - 12" Steel
- Blower: 115 VAC - 15 amp input
- 2-stage generates over 6 psi at sea level
- Agitator motor: 1-1/2 HP 115 VAC - 15 amp input
- 3" Outlet
- Output:  
Cellulose: 2,400 lbs/hr  
Fiberglass: 700 lbs/hr  
Rockwool: 2,100 lbs/hr  
Results vary by manufacturer
- Power cords not included

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
B	BLO-K20022CPO	Force/2 - Requires 2 Straight Blade Power Cords	350
	BLO-K20022	Force/2 Next Generation Wireless - Requires 2 Straight Blade Power Cords	350

\*Power cords not included.

## POWER CORDS - TWIST LOCK

Twist lock, heavy duty, all-weather power cords for use with Intec blowing machines.

KEY	SKU	DESCRIPTION	MIN QTY
	BLO-40105-00	100' 12/3 - Works with TFHPMAX	1
	PWRCD50TL	50' 12/3 - Works with TFHPMAX	1

## (C) INTEC TURBO FORCE HP3 WIRELESS

The TURBO FORCE provides users with production rates similar to truck mount systems, with the performance and precision of an Intec portable system. These units have it all for the demanding professional. Large 17 cubic foot hopper & large loading platform, dual agitation for aggressive feed and conditioning, impressive production with best-in-class wall fill rates, and Intec Quick-Access design features - including revolutionary tilt-back design—to keep your uptime at a maximum.

### Specifications:

- 3" Outlet
- Electrical: 115 VAC  
3 - 15 amp circuits with hP3  
2 - 15 amp & 1-20 amp circuit with hP MAX
- Industrial Wireless Remote with 250' operating range
- TFHP3 Output:  
Cellulose: 2,475 lbs/hr  
Fiberglass: 900 lbs/hr  
Rockwool: 2,460 lbs/hr  
Results vary by manufacturer
- TFHP MAX Output:  
Cellulose: 3,200 lbs/hr  
Fiberglass: 1,200 lbs/hr  
Rockwool: 3,150 lbs/hr  
Results vary by manufacturer

- Agitator motor: TURBO FORCE & hP3: 1/2 HP, 115 VAC, 7.1 amp  
TURBO FORCE hP MAX: 3/4 HP, 115 VAC, 9.5 amp
- Airlock motor: TURBO FORCE & hP3: 1/2 HP, 115 VAC, 7.1 amp  
TURBO FORCE hP MAX: 1 HP, 115 VAC, 7.8 amp

### Power cords not included

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
C	BLO-40003-001	HP2 Wireless - Requires 3 Straight Blade Power Cords	390
	BLO-40031-01	HP3 Wireless - Requires 2 Straight Blade Power Cords and 1 Twist Lock Power Cord	570

\*Power cords not included.

## POWER CORDS - STRAIGHT BLADE

Straight blade, heavy duty, all-weather power cords for use with Intec blowing machines.

KEY	SKU	DESCRIPTION	MIN QTY
	BLO-40109-00	100' 12/3 - Works with F257HD, F257HDW, TFHP3W, and TFHPMAX	1
	BLO-40108-00	50' 12/3 - Works with F257HD, F257HDW, TFHP3W, and TFHPMAX	1



## (A) VORTEC MEGA BEAST VACUUM

Featuring the highest production rate, reduced maintenance, and fantastic ROI of all Vortec vacuums. It is designed for fast & profitable recycling of spray applied insulation, removal of damaged insulation due to fire, water, and smoke, and HVAC cleaning. The Mega Beast is oversized to remove more than twice the material as the Beast. The Mega Beast features a 25" impeller, 35hp Vanguard commercial V-Twin motor with electric start, and 8" inlet (6" optional).

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
A	BLO-IVMEGABEAST	MEGA BEAST High-Powered Vacuum 34HP Motor w/ Electric Start	

## (B) VORTEC BEAST VACUUM

Engineered for high productivity. Powered by a 21HP Honda GX660 V-Twin engine. A patented impeller moves high volumes of air and insulation. Highly portable design. The shroud is made of long-lasting, double-thick abrasive resistant steel at wear areas. 6" inlet and outlet with safety flaps covering both. Dispersion inlet allows for smoother and more consistent suction from the vacuum.

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
B	IVBEAST	Intec Vortec BEAST High-Powered Vacuum w/ Electric Start	422

## (C) VORTEC CANNON VACUUM


Engineered for high value generation. Powered by a 13HP Vanguard V-Twin engine. A patented impeller moves high volumes of air and insulation. Highly portable design. The shroud is made of long-lasting, double-thick abrasive resistant steel at wear areas. 6" inlet and outlet with safety flaps covering both. Dispersion inlet allows for smoother and more consistent suction from the vacuum.

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
C	BLO-74000C	Intec Vortec CANNON Vacuum w/ Electric Start	361

## (D) VORTEC VACSHIELD

By preventing foreign materials from entering the vacuum, both personal safety and the life expectancy of the vacuum are extended. Air sealed doors provide easy access for cleaning and prevents any air leakage so vacuum can maintain its power.

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
D	IVSHIELD	Vortec VACSHIELD, 6" Inlet and Outlet	28
	IVSHIELDMEGA	Vortec Mega VACSHIELD, 8" Inlet and Outlet	

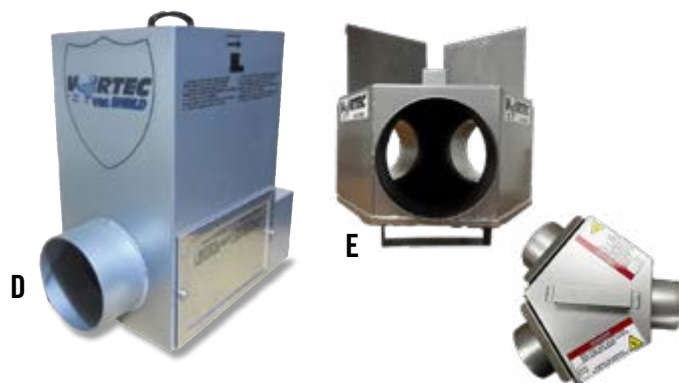

## (E) VORTEC TWIN TURBO

Eliminate bag change down time when you connect two bags to the splitter and save 30min. per house. Or increase production by connecting two hoses and put two individuals on the clean-up job. Either way, the Vortec Twin Turbo maximizes your productivity and boosts your profits!

KEY	SKU	DESCRIPTION	INLET SIZE	OUTLET SIZE	MIN QTY
E	BLO-74400S	Vortec Twin Turbo Splitter	6"	6"	1
	BLO-74420-06-S	Vortec Twin Turbo Splitter	6"	8"	1
	BLO-74410-06	Mega Twin Turbo Splitter	6"	8"	1






A



B




C

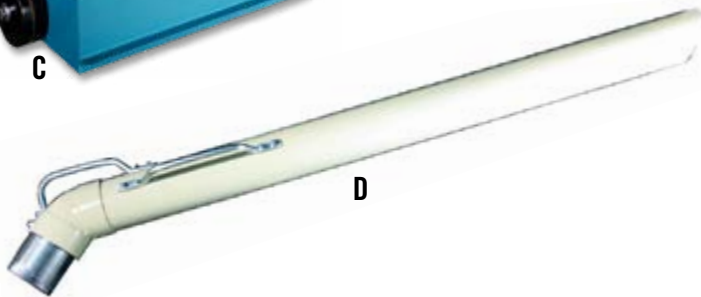

D



E

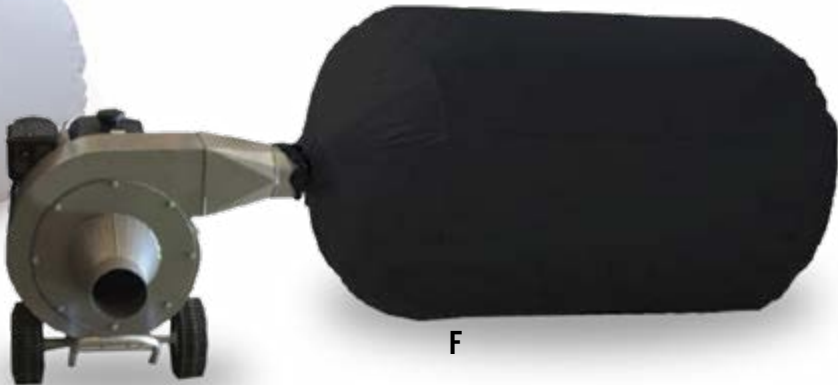

F

**(A) KRENDL KV180 VACUUM**

- 18 HP Briggs & Stratton gas engine, electric start
- 6" inlet and outlet tubes
- 18" steel fan, production of 7000 lbs/hour

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
A	BLO-GV180	Krendl – 18hp, 6"	240

**(B) KRENDL GV240 VACUUM**

- 23 HP Briggs & Stratton gas engine
- Belt driven
- 8" inlet and outlet tubes
- 18" steel fan, production of 9000 lbs/hour

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
B	BLO-GV240B8	Krendl – 23hp, 8"	331

**(C) KRENDL VACUUM DEFENDER**

Designed to remove potentially damaging debris before it comes in contact with the vacuum fan blades. Innovative design reduces wear and tear—prolonging the life of your vacuum.

- 6" Inlet and outlet tubes
- Reducer kit available

KEY	SKU	DESCRIPTION	WEIGHT (LBS)
C	BLO-GVDEFENDER	Krendl Vacuum Defender	60

**(D-F) VACUUM BAGS AND SUCTION TUBE**

KEY	SKU	DESCRIPTION	BAGS/CASE	MIN QTY
D	WV101	48" Suction Tube Attachment	-	1
E	SPVAC-BAG	Vacuum Bags – 75 cu ft., 55 GSM	5	1cs
F	VACBAGHD	Heavy Duty Bags – 75 cu ft., 118 GSM	5	1cs



A



B



C



D

## (A) LONG NOSE PLASTIC PLUGS

Exceptional design. With a 5/8" shank and heavy gripping teeth, this plug will hold in both single and multiple layers of siding. Extra wide cap has a tapered edge for obscured vision on siding. Textured surface for easy painting.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>LS-100</b>	Long Nose Plastic	1"	500
	<b>LS-125</b>	Long Nose Plastic	1-1/4"	250
	<b>LS-150</b>	Long Nose Plastic	1-1/2"	250
	<b>LS-200</b>	Long Nose Plastic	2"	250

Measurements are the diameter of the threads and not the cap of the plug.

## (B) REGULAR PLASTIC PLUGS

Paintable matte finish with a 3/8" shank and two clips on each side for a firm grip in aluminum, vinyl and steel siding.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>B</b>	<b>WZPP1</b>	Regular Plastic	1"	500
	<b>WZPP114</b>	Regular Plastic	1-1/4"	250
	<b>WZPP112</b>	Regular Plastic	1-1/2"	250
	<b>SP-200</b>	Regular Plastic	2"	250
	<b>SP-213BL</b>	Regular Plastic – Black	2-1/8"	250
	<b>WZPP212H</b>	Regular Plastic	2-1/2"	250
	<b>SP-300BL</b>	Regular Plastic – Black	3"	100

Measurements are the diameter of the threads and not the cap of the plug.

## (C) FOAM (STYROFOAM) PLUGS

Styrofoam plugs are used for holes in drywall and are recessed to accept spackling compound. They absorb little moisture, thus require fewer layers of spackling for a smooth finish.


KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>C</b>	<b>WZPF1-1M</b>	Foam Plug	1"	1,000
	<b>FP150B</b>	Foam Plug	1-1/2"	1,000
	<b>FP200B</b>	Foam Plug	2"	1,000
	<b>FP213B</b>	Foam Plug	2-1/8"	1,000
	<b>FP250B</b>	Foam Plug	2-1/2"	750
	<b>FP256B</b>	Foam Plug	2-9/16"	750
	<b>FP279B</b>	Foam Plug	2-5/8"	750
	<b>FP-300</b>	Foam Plug	3"	500

## (D) WOOD PLUGS

Unlike other plugs, which are completely tapered, these wood plugs are slightly tapered over only 7/8 of the total thickness for easy insertion. The top 1/8 is the full diameter measurement for a tight, even fit. Made from kiln-dried lumber and produced on specially designed equipment for consistent high quality.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>D</b>	<b>WP-100</b>	Poplar / Pine Plug	1"	250
	<b>WP-125</b>	Poplar / Pine Plug	1-1/4"	175
	<b>WZPWP112</b>	Poplar / Pine Plug	1-1/2"	125
	<b>WZPW2-250</b>	Poplar / Pine Plug	2"	250
	<b>WZPWP2</b>	Poplar / Pine Plug – Standard †	2"	250
	<b>WP-213</b>	Poplar / Pine Plug	2-1/8"	250
	<b>WP-225</b>	Poplar / Pine Plug	2-1/4"	225
	<b>WP-250</b>	Poplar / Pine Plug	2-1/2"	175
	<b>WZPWP2916</b>	Poplar / Pine Plug	2-9/16"	175
	<b>WP-300</b>	Poplar / Pine Plug	3"	125

† For use with Milwaukee hole saws.

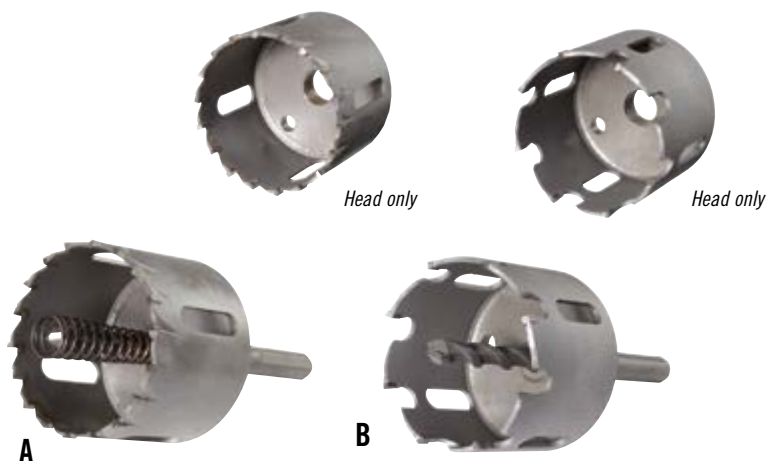

## RELTON TOOTH HOLE SAWS

Ideal for cutting holes to install fiberglass, cellulose and other injected insulation. Carbide tips are brazed to the hole saw body with special high-temperature silver solder. Elongated slots allow easy plug removal. Consistently cut round holes are easily patched with wood or plastic plugs. Complete saws include cutter head, shank and carbide pilot.

### (A) RELTON CARBIDE-TOOTH STUCCO HOLE SAWS


Stucco saw cuts stucco, mesh, asbestos or aluminum siding.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>A</b>	<b>ISHS-16</b>	Relton Carbide-Tipped Stucco Saw	1"	1
	<b>ISHS-18</b>	Relton Carbide-Tipped Stucco Saw	1-1/8"	1
	<b>ISHS-20</b>	Relton Carbide-Tipped Stucco Saw	1-1/4"	1
	<b>ISHS-24</b>	Relton Carbide-Tipped Stucco Saw	1-1/2"	1
	<b>RSS200</b>	Relton Carbide-Tipped Stucco Saw	2"	1
	<b>ISHS-34</b>	Relton Carbide-Tipped Stucco Saw	2-1/8"	1
	<b>TLISHS-40</b>	Relton Carbide-Tipped Stucco Saw	2-1/2"	1
	<b>ISHS-48</b>	Relton Carbide-Tipped Stucco Saw	3"	1
	<b>ISHS-24HO</b>	Relton Carbide-Tipped Stucco Saw, Head Only	1-1/2"	1
	<b>ISHS-32HO</b>	Relton Carbide-Tipped Stucco Saw, Head Only	2"	1
	<b>TLBDISHS40HO</b>	Relton Carbide-Tipped Stucco Saw, Head Only	2-1/2"	1

### (B) RELTON STEEL-TOOTH WOOD HOLE SAWS

Wood saw works best in any type wood, including particle board.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>B</b>	<b>FHS-16</b>	Relton Carbide-Tipped Wood Saw	1"	1
	<b>FHS-18</b>	Relton Carbide-Tipped Wood Saw	1-1/8"	1
	<b>FHS-20</b>	Relton Carbide-Tipped Wood Saw	1-1/4"	1
	<b>FHS24</b>	Relton Carbide-Tipped Wood Saw	1-1/2"	1
	<b>FHS-32</b>	Relton Carbide-Tipped Wood Saw	2"	1
	<b>FHS-34</b>	Relton Carbide-Tipped Wood Saw	2-1/8"	1
	<b>TLBFHS-40</b>	Relton Carbide-Tipped Wood Saw	2-1/2"	1
	<b>FHS-48</b>	Relton Carbide-Tipped Wood Saw	3"	1
	<b>FHS-40HO</b>	Relton Carbide-Tipped Stucco Saw Head Only	2-1/2"	1
	<b>FHS-48HO</b>	Relton Carbide-Tipped Stucco Saw Head Only	3"	1

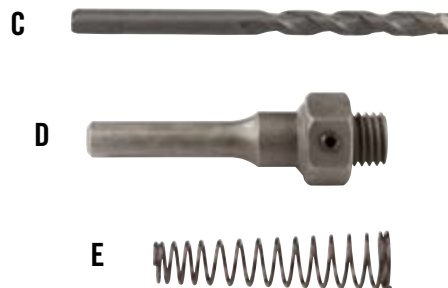

### (C-E) RELTON HOLE SAW REPLACEMENT PARTS


KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>TLBDCP42</b>	Relton Pilot (for less than 2") – 1/4" Carbide	1
	<b>SP-42</b>	Relton Pilot (for less than 2" – 1/4" Steel	1
	<b>TLBDCP62</b>	Relton Pilot (for 2" and more) – 3/8" Carbide	1
	<b>SP-62</b>	Relton Pilot (for 2" and more) – 3/8" Steel	1
<b>D</b>	<b>HS-S4</b>	Relton Shank – 1/4"	1
	<b>HS-S6</b>	Relton Shank – 3/8"	1
<b>E</b>	<b>ES42</b>	Relton Ejector Spring (for less than 2")	1
	<b>RES062</b>	Relton Ejector Spring (for 2" and more)	1

## ASBESTOS CUTTER

### (F) ASBESTOS CUTTER BIT


Rugged bits, best for asbestos siding. Built to be sharpened repeatedly. Comes with carbide pilot.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
<b>F</b>	<b>AB-100</b>	Asbestos Bit w/ Carbide Pilot	1"	1





# HOLE SAWS & BITS

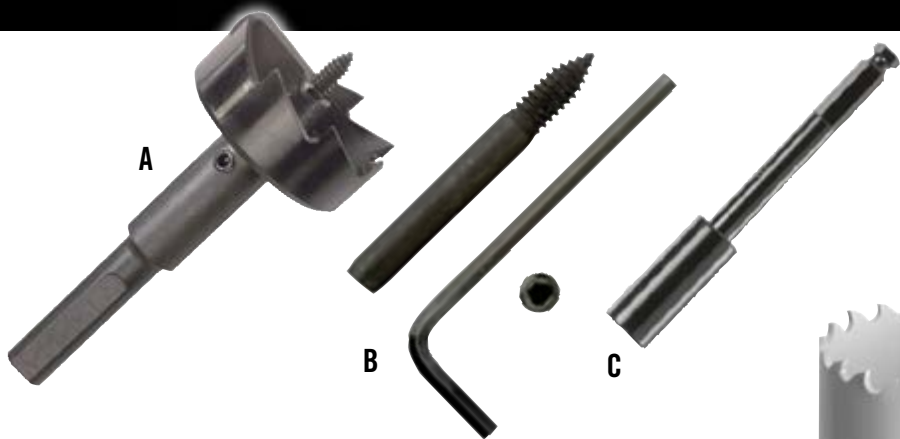

## WOOD BORING SYSTEM

One-piece construction bits with cutter blades welded to shanks. They are self-feeding with one replaceable pilot screw that fits all sizes, eliminating the need to match parts. The black oxide finish is rust resistant. The easy to use, fast cutting bits won't separate when backing out, and they're easy to sharpen with only two cutters.

### (A) SELF-FEED WOOD BITS

Automatic-feed wood bits feature outside diameter threads and replaceable lead screws.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
A	SF1001	Self-Feed Wood Bit	1"	1
	SF1251	Self-Feed Wood Bit	1-1/4"	1
	SF1501	Self-Feed Wood Bit	1-1/2"	1
	SF2001	Self-Feed Wood Bit	2"	1
	SF2121	Self-Feed Wood Bit	2-1/8"	1
	SF2561	Self-Feed Wood Bit	2-9/16"	1

### (B-C) WOOD BIT REPLACEMENT PARTS

KEY	SKU	DESCRIPTION	MIN QTY
B	SF5018	Replacement Kit, Self-Feed 1/8"	1
C	EX1006	Extension, 6", 7/16" Shank (3/pk)	1
	EX1012	Extension, 12", 7/16" Shank	1



## HOLE SAWS

Long-lasting bi-metal hole saws. Arbor, standard and carbide-tipped pilots sold separately.

### (D) BI-METAL HOLE SAWS

Bi-metal construction with a high-speed steel cutting edge. Vari-Tooth design creates sharper tooth tips for faster, freer cutting. Cutting depth is 1-1/2". Positive rake tooth creates a more aggressive cutting action than conventional tooth styles.

KEY	SKU	DESCRIPTION	SIZE	MIN QTY
D	HB100	Bi-Metal Hole Saw	1"	1
	HB112	Bi-Metal Hole Saw	1-1/8"	1
	HB125	Bi-Metal Hole Saw	1-1/4"	1
	HB150	Bi-Metal Hole Saw	1-1/2"	1
	HB200	Bi-Metal Hole Saw	2"	1
	HB206	Bi-Metal Hole Saw	2-1/16"	1
	HB212	Bi-Metal Hole Saw	2-1/8"	1
	HB250	Bi-Metal Hole Saw	2-1/2"	1
	HB256	Bi-Metal Hole Saw	2-9/16"	1
	HB300	Bi-Metal Hole Saw	3"	1

### (E-K) BI-METAL HOLE SAW PARTS

KEY	SKU	DESCRIPTION	MIN QTY
E	HSPB	High Speed Steel Pilot Bit – 3-1/8"	1
F	HTCTCP-C	Carbide-Tipped Pilot Bit – 4-3/4"	1
G	PCM12	Quick Change Mandrel, 1/2" Shank	1
H	PCM38	Quick Change Mandrel, 3/8" Shank	1
I	HSBAM	Standard Mandrel, 3/8" Shank Fits Hole Saws 9/16" to 6", 3/8" Shank	1
J	AN01-C	Quick Change Adaptor Fits Hole Saws 9/16" to 1-3/16"	1
K	AN02-C	Quick Change Adaptor Fits Hole Saws 1-1/4" to 6"	1



**BOSCH**



## (A) DRYWALL GASKET

Conformable 3/16" thick polyethylene flexible foam gasket strip (better known as sill seal). Drywall Gasket can reduce air infiltration between framing and drywall, helping to close the gaps on energy leaks. Unroll and staple to face of top and bottom plates of unfinished wall. Then apply around window and door openings before installing drywall. Larger widths for use with sealing sill plates.

KEY	SKU	DESCRIPTION	MIN QTY
A	SS2050A	Drywall Gasket Sill Seal – 2" x 50'	1 RL
	SS3550A	Sill Seal – 3-1/2" x 50'	1 RL
	ADSS5550	Sill Seal – 5-1/2" x 50'	1 RL
	SS7550A	Sill Seal – 7-1/2" x 50'	1 RL

## (B) 3M VINYL FOAM SEALANT TAPE


A specially formulated pressure-sensitive adhesive system applied to a very flexible, closed cell vinyl foam. The vinyl foam tape is grey in color and has a density of 10 lb. per cubic foot.

KEY	SKU	DESCRIPTION	ROLLS/CASE
B	TPFOAM14-50	3M Vinyl Foam Sealant Tape (3/8" x 1/4") x 50'	32

## (C) MILE HIGH FOAM® BACKER ROD

Continuous lengths of flexible, round, closed cell polyethylene. Backer rod serves as a backing for elastomeric and other applied caulking sealants, controlling the depth and amount of sealant required. Black in color. All 8 sizes are shipped in an 18" x 18" x 30" box.

KEY	SKU	DESCRIPTION	ROLLS/BOX
C	MHST014	Backer Rod – 1/4" x 6400'	1
	SPWZBR0D38S-SPL	Backer Rod – 3/8" x 3600'	1
	22BR12C	Backer Rod – 1/2" x 2500'	1
	WZBR0D058-1550	Backer Rod – 5/8" x 1550'	1
	SPWZBR0D075	Backer Rod – 3/4" x 1100'	1
	SPWZBR0D078	Backer Rod – 7/8" x 850'	1
	BRM1550	Backer Rod – 1" x 550'	1
	MHST114	Backer Rod – 1-1/4" x 400'	1

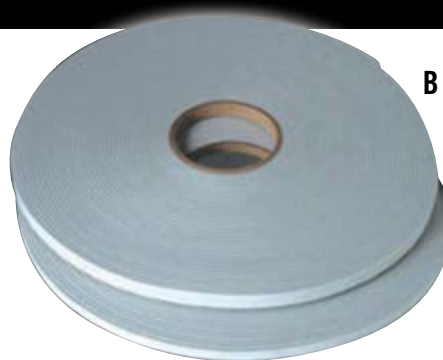

B



C



D



E

## (D) DOW GREAT STUFF PRO™ GASKET FOAM

Designed to form a gasket-in-place foam where it is applied to the interior face of framing lumber, especially top and bottom plates, inside and outside corners and around rough openings. Effective at blocking air leaks past the top plate into the attic and through the bottom plate and the rim joist. Flexible and easily compressible.

- Water-based and water clean-up before cure
- Seals over rough framing features, joist hangers, strapping, etc

KEY	SKU	DESCRIPTION	CANS/CASE
D	DOW12011680	Dow Drywall Gasket Foam – 18oz Can	12

## (E) DOW GREAT STUFF PRO™ GASKET FOAM GUN

Great Stuff Pro™ Gasket Dispensing Gun built solely to apply gaskets with professional accuracy. Adjustable flow-control dispenses beads from 1/8" to 3". Lightweight, durable, no-drip dispensing, and easy clean-up with a garden hose.

KEY	SKU	DESCRIPTION	MIN QTY
E	DOW99085895	Dow Gasket Foam Gun	1

## (F) GRACO ULTRA MAX 795 AIRLESS SPRAYER

The Ultra Max II 795 Standard Series electric airless sprayer has a 2.2 hp brushless DC motor to handle multiple guns and includes the industry-proven Chromex pump with 2X life, SmartControl 4.0, BlueLink Job & Sprayer Management System, the lightweight and easy-to-use Contractor PC gun and more.

KEY	SKU	DESCRIPTION	MIN QTY
F	GR17E579	Ultra Max II 795 Standard Series Airless Sprayer	1

## (G) ECOSEAL PLUS™ ELASTOMERIC SEALANT

ECOSEAL Plus™ with Gasket Pro Technology is a fast-drying, water-based elastomeric spray that seals penetrations and joints in the building envelope, as well as provides a gasket between studs and drywall. Dries to a flexible but tough film and has great bond strength with low odor and zero V.O.C. Should be used with Knauf EcoBatt® Insulation or blowing insulation. Meets or exceeds all state and federal VOC requirements for architectural sealants; VOC: 0

KEY	SKU	DESCRIPTION	PAIS/PALLET
G	725387986203	Knauf ECOSEAL Plus Gasket Pro	36

BATT KNIVES



(A-C) WOOD HANDLE BATT KNIFE

General purpose professional cutting tool. 1" wide high carbon steel blade. Precision machine-ground cutting edge. With smooth wooden handle, this product won't get hung up on the insulation.

KEY	SKU	DESCRIPTION	MIN QTY
A	TOOL60450	Batt Knife w/ Wood Handle – 4"	1
B	60630	Batt Knife w/ Wood Handle – 6"	1
C	TLKB8	Batt Knife w/ Wood Handle – 8"	1

(D-E) BLACK DRAGON BATT KNIFE

General purpose professional cutting tool. 1" wide high carbon steel blade. Precision machine-ground cutting edge. Ergonomically engineered soft grip handles for positive grip and more powerful cutting. Designed with finger stops for maximum leverage and added safety. No-roll handle shape. Textured grip resists sliding in your hand or on inclined surfaces. LIFETIME GUARANTEE that blade will not separate from handle.

KEY	SKU	DESCRIPTION	MIN QTY
D	TOOL60110	Black Dragon Batt Knife – 6"	1
E	TLKBD8	Black Dragon Batt Knife – 8"	1

(F) VINTOOL BATT KNIFE

Designed by an insulation contractor to be "The Best on the Market." It has a 4" replaceable cutting blade with a soft grip handle. Blade is seated in utensil with set screws. The end of the handle has a small screwdriver mounted in it for convenience when changing blades. Extra blades can be stored inside the handle. Comes with 5 blades and a leather sheath that will fit most belts.

KEY	SKU	DESCRIPTION	MIN QTY
F	VT400	Vintool Batt Knife w/ Leather Sheath – 4"	1

(G) BLADES FOR VINTOOL BATT KNIFE


With the storage compartment in the handle of the Vintool you can load an entire tube for quick and easy change outs. USA made.

KEY	SKU	DESCRIPTION	MIN QTY
G	TL113-21	Vintool Blades – (4" (10/tube)	1TB


(H) LEATHER BATT KNIFE SHEATH

Custom-made and designed to accommodate both 6" and 8" batt knives. It can be used for Black Dragon or wood handle knives. With riveted stress points, this rigid accessory leaves no part of the blade exposed, thus preventing accidental injuries.

KEY	SKU	DESCRIPTION	MIN QTY
H	TOOLT35B	Leather Batt Knife Sheath – 8" x 2"	1

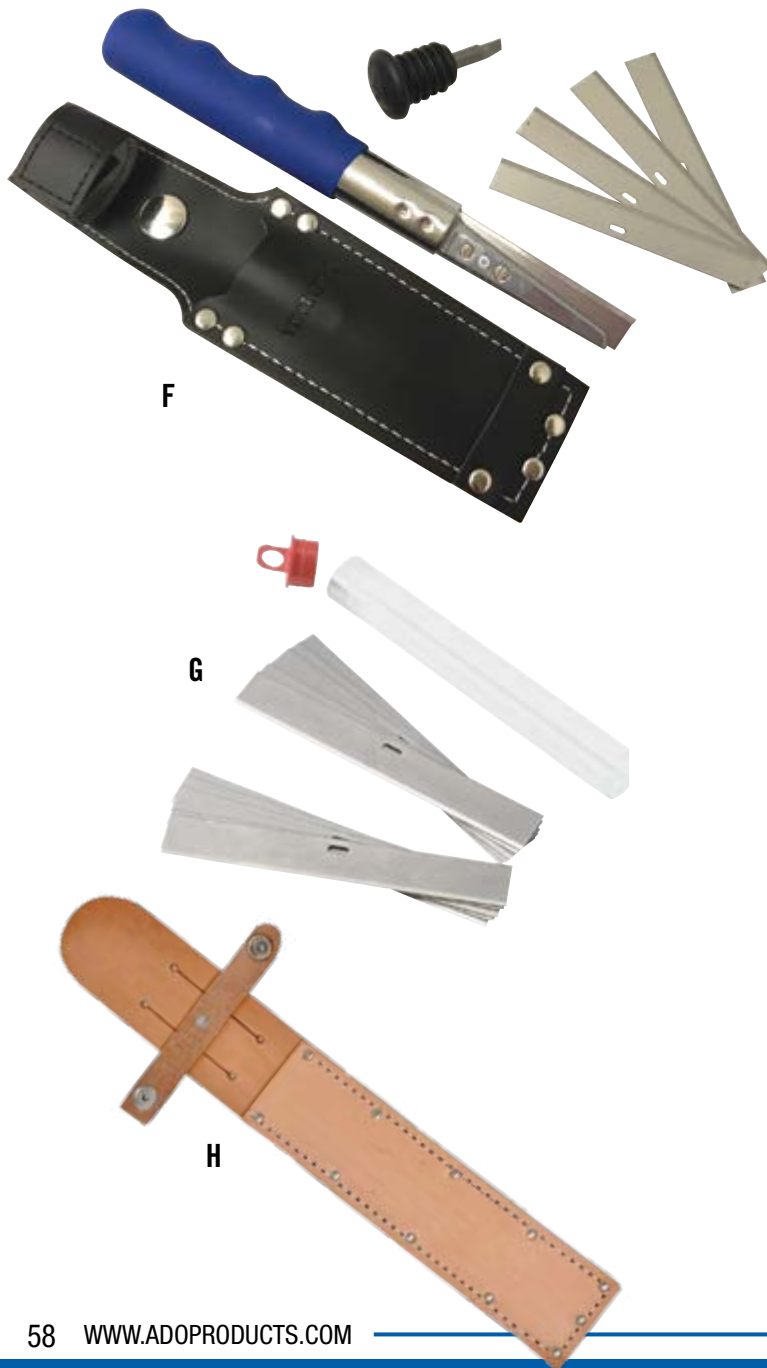



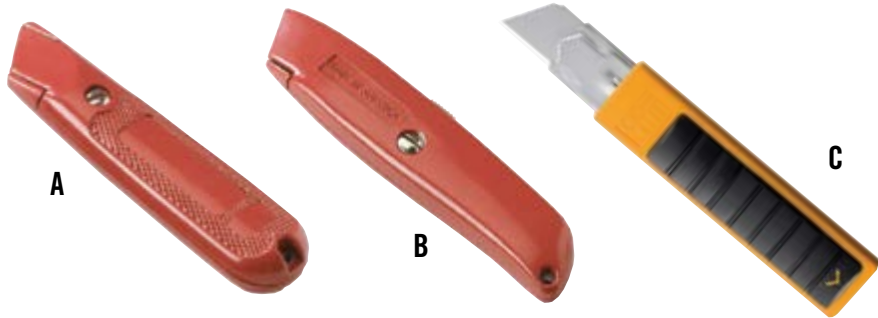

(A) FIXED BLADE UTILITY KNIFE

Stays in one fixed position with blade extended. All metal heavy duty handle with blade storage. USA made—high quality.

KEY	SKU	DESCRIPTION	MIN QTY
A	TL117-99B	Utility Knife, Fixed Blade	1

(B) RETRACTABLE BLADE UTILITY KNIFE

Retracts for safety and convenience. All metal heavy duty handle with blade storage. USA made—high quality.

KEY	SKU	DESCRIPTION	MIN QTY
B	TE03-993	Utility Knife, Retractable Blade	1

(C) OLFA XHD CUTTER KNIFE

Extra heavy duty sure grip cutter features a ratchet wheel blade lock to prevent slipping and a rubber grip insert for positive handle control. Knife body is GUARANTEED FOREVER.

KEY	SKU	DESCRIPTION	MIN QTY
C	UKH1	OLFA XHD Cutter w/ Rubber Grip Insert	1

(D) UTILITY KNIFE BLADES

USA made of the finest quality steel. In boxes of 100 blades, they come wrapped in five-blade packages for safety and convenience.

KEY	SKU	DESCRIPTION	MIN QTY
D	TL112-09	Standard Utility Blade, – 100/bx	1Bx

(E) OLFA XHD RETRACTABLE BLADES

Extra heavy duty snap-off replacement blades. Each blade is produced using OLFA's precise multi-step production process for amazing sharpness and superior edge retention. Easily handles cutting through difficult materials. Seven cutting edges per blade strip. 20-pack features 140 cutting edges.

KEY	SKU	DESCRIPTION	MIN QTY
E	UKB20	OLFA XHD Blades – 20/pkg	1PKG

(F) LEATHER BELT

Adjusts up to a 46" waist and is 2" wide.

KEY	SKU	DESCRIPTION	MIN QTY
F	TLLB-100	Leather Belt	1

(G) INSULATOR'S 2-POCKET LEATHER TOOL POUCH

Leather pouch with divider inside and utility knife holder on the front.

KEY	SKU	DESCRIPTION	MIN QTY
G	TLTP-102	Tool Pouch, 2-Pocket Insulator's Pouch	1



# ATTIC ACCESS COVERS



## (A) DRAFTMASTER ATTIC STAIRWAY INSULATORS

The Draftmaster Attic Stairway Insulator insulates and seals the drop down attic stairway. Offers R-Value of 15, reflects 96% of radiant heat. They offer a no-trip opening and easy open zipper. The seams are double stitched for extra support increasing the product's lifespan. Installs in 5 minutes or less. Draftmasters utilize radiant foil on both sides of the insulator, not just one side. 10-year warranty.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>AI542416</b>	Draftmaster Attic Stairway Insulator – 54" x 24" x 16"	1
	<b>TADDM265416</b>	Draftmaster Attic Stairway Insulator – 54" x 26" x 16"	1
	<b>AI5422</b>	Draftmaster Attic Stairway Insulator – 54" x 22" x 12"	1
	<b>TADDM265412</b>	Draftmaster Attic Stairway Insulator – 54" x 26" x 12"	1
	<b>TADDM305415</b>	Draftmaster Attic Stairway Insulator – 54" x 30" x 15"	1
	<b>TADDM306015</b>	Draftmaster Attic Stairway Insulator – 60" x 30" x 15"	1

## (B) PULL DOWN LADDER JACKET WITH POCKET

This easy-to-install insulator closes the insulation gap created by attic stair access. The insulator is comprised of durable, highly reflective foil. No assembly required. The lightweight design provides comfort for your home year-round. The insulator is available with a patented insulation chamber that provides high thermal value over the attic stairway/ladder entrance.

- Tested for ASTM C518 and is rated up to R58
- Very durable – comes with SCRIM protection
- 99.8% aluminum material
- Class "A" fire rated
- Class 1 vapor retardant

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>SES542210P</b>	Pocket Attic Stairway Jacket – 54" x 22" x 10"	1
	<b>SES542610P</b>	Pocket Attic Stairway Jacket – 54" x 26" x 10"	1
	<b>SES543016P</b>	Pocket Attic Stairway Jacket – 54" x 30" x 16"	1

\*For horizontal installation – designed to seal pull-down stair openings.

KEY	SKU	DESCRIPTION	MIN QTY
	<b>SESKWP</b>	Pocket Knee Wall Jacket – 48" x 24" x 3"	1

\*For vertical installation – designed to seal knee wall doors.

## (C) INSUL-DOOR

The Insul-Door is a perfect replacement for old plywood attic doors. Packing carton reverses to make a dam around the hole to keep the insulation in the attic. Shipped 24" x 32" x 8" thick, cut to size. R30 R-Value.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>IDR30</b>	R30 – 24"w x 32"l x 8" thick	1

## (D) SOLAR POWERED ATTIC VENTILATION


A natural, cost effective way to help your customer's homes be more comfortable and efficient. Correct ventilation will keep the attic more temperate & dry, which keeps the home more comfortable, thus requiring less use of the heating and cooling system. Installing a solar fan results in a more comfortable home and lower energy bills. Every home should have proper attic ventilation with solar fans, and because our solar attic fans rely on the sun, they require \$0 to run.

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>AISAF25W</b>	25w, 1,365CFM	1
	<b>AISAF30W</b>	30w, 1,550CFM	1
	<b>AISAF70W</b>	70w, 3,850CFM	1

**B**



**C**

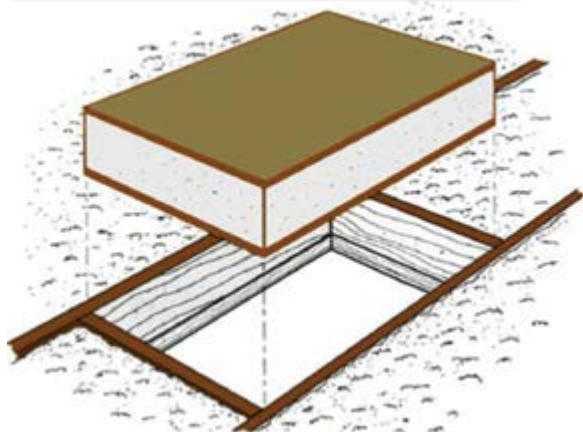

**D**



## (A) TENMAT RECESSED LIGHT COVERS

Made out of a fire-resistant mineral wool that exhibits excellent thermal insulating properties. Compatible with sprayed foam insulation, low-density foam, blown-in insulation and lay-in insulation. Can be used with IC-rated and non-IC-rated lights.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>FF130E</b>	Tenmat Light Cover – 15"l x 14"w x 9"h	1
	<b>FF135</b>	Tenmat Light Cover – 16-1/2" Diam x 11" h	1



## (B) INSUL-SHIELD

Your best protection against fire caused by heat build-up from insulating over or too close to non-IC-rated recessed lights, or other heat-producing fixtures. 14" x 24' roll makes about six to eight shields.

- Lightweight 30-gauge aluminum material
- Safe for use with cellulose, fiberglass and rockwool insulation

KEY	SKU	DESCRIPTION	ROLLS/CARTON	MIN QTY
<b>B</b>	<b>IS1424</b>	Insul-Shield – 14" h x 24' Roll	12	1RL



## (C) POLY RECESSED LIGHT COVER

A great way to get an airtight seal over IC-rated recessed lights for new or retrofit applications. Not to be used on non-IC-rated lights.

- Made of an extra heavy grade of polyethylene film
- Pre-formed to fit over most light cans

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>SVB18</b>	Poly Cover – 12"w x 18"l x 8"h	1



## (D) THE INSUL-LITE® PRO PLUS RECESSED LIGHT COVER

Fire retardant cover designed to allow the installer to insulate safely and effectively around recessed lights. When installed, the Insul-Lite® allows insulation to be placed as close to the light or heat producing fixture as possible without the risk of fire. Use solid covers for IC-rated lights only.

KEY	SKU	DESCRIPTION	QTY/PACK	MIN QTY
<b>D</b>	<b>IL10S</b>	Insul-Lite Pro – 10" x 10" x 12"	25	1PK
	<b>IL12S</b>	Insul-Lite Pro – 12.5" x 12.5" x 14"	25	1PK





# CRAWL SPACE SUPPLIES



## (A) APRILAIRE DEHUMIDIFIERS

Reduce the risk of pests, mold, and decay by reducing the humidity with APRILAIRE dehumidifiers. Fan mode provides coverage of dehumidified area or crawlspace by circulating air. Aluminum coils protect the refrigeration system from chemicals in the air. Includes 5-year reliability warranty.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>E070</b>	Dehumidifier, 70 Pints/Day, Crawlspace Unit Up to 2,200 sq ft	1
	<b>E100</b>	Dehumidifier, 100 Pints/Day, Crawlspace Unit Up to 5,500 sq ft	1

## (B) ADVANCED VAPOR BARRIER SYSTEM

The Your Crawlspace encapsulation system uses innovative, patented, and proprietary technology to create the only vapor barrier system that is truly sealed without the use of mechanical fasteners.

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>YCS9125100VBW</b>	8mil Floor Liner - 12' x 100'	1
	<b>YCS1512100VBW</b>	14mil Floor Liner - 12' x 100'	1

## (C) DRAIN MAT

Tailored for crawlspace and basements, this barrier has a padded felt bottom that is virtually puncture proof and extremely effective for water and soil gas distribution. The drain mat is remarkably flexible, features a polished glossy finish, and is guaranteed to never delaminate or off gas.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>YCS368100</b>	36mil Drain Mat - 8' x 100'	1
	<b>YCS45100VBW</b>	45mil Premium Drain Mat - 94" x 100'	1

## (D) CRAWL CURTAIN

Tailored for crawlspace and basements, this barrier has a padded felt bottom that is virtually puncture proof and extremely effective for water and soil gas distribution. The drain mat is remarkably flexible, features a polished glossy finish, and is guaranteed to never delaminate or off gas.

KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>YCS-3CC-100</b>	Crawl Curtain - 3' x 100"	1

## (E-I) VAPOR BARRIER ACCESSORIES

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>YCS-CSSPK-GT</b>	1/3 HP Sump Pump Kit	1
<b>F</b>	<b>YCSPRO01</b>	Pro Cleaner - 1 Gal	1
<b>G</b>	<b>YC SSA1010Z</b>	Magic Adhesive - 10.1oz, 12/Case	1cs
<b>H</b>	<b>YCS4180STW</b>	Seam Tape - 4" x 180', White, 12/Case	1cs
<b>I</b>	<b>YCS100WAT</b>	Wall Attachment Tape - 2" x 100', 9/Case	1cs



**(A) VIPER CS VAPOR BARRIER**

Viper CS is a white, cross-woven, extrusion coated polyethylene vapor barrier designed specifically for controlling moisture and soil gas migration in crawl space applications. Its bright white color gives any crawl space a fresh, clean look while combating the harmful effects of radon, moisture, mold and mildew. The engineered composition of Viper CS gives it superior tear strength, puncture resistance and water vapor permeance when compared to traditional materials.

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>BVCS654200</b>	Viper Vapor Barrier, 6.5mil – 4' x 200'	1RL
	<b>BVCS6512100</b>	Viper Vapor Barrier, 6.5mil – 12' x 100'	1RL
	<b>BVCS1012100</b>	Viper Vapor Barrier, 10mil – 12' x 100'	1RL
	<b>BVCS1612100</b>	Viper Vapor Barrier, 16mil – 12' x 100'	1RL

**(B) VIPER VAPOR TAPE**

White polyethylene coated film with an aggressive adhesive designed for seaming, splicing, sealing, patching and hanging vapor barrier materials.

KEY	SKU	DESCRIPTION	MIN QTY
<b>B</b>	<b>CS4180WTP</b>	Viper Vapor Tape, White Poly – 4" x 180'	1cs

**(C) VIPER DOUBLE BOND TAPE**

Double-sided butyl tape used for “double-locking” seams and as a gasket material between vapor barrier membrane and foundation walls.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>TVPDB290</b>	Viper Double Bond Tape – 2" x 90'	1cs

**(D) VIPER PIER WRAP**

Utilizes Viper CS configuration and is conveniently sized to help complete install details around pipes, penetrations, piers and structural supports.


KEY	SKU	DESCRIPTION	MIN QTY
<b>D</b>	<b>CS1018200</b>	Viper Pier Wrap, 10mil – 18" x 200'	1RL

**(E) VIPER CRAWL SPACE LINER PINS**

The best way to secure vapor barrier materials to masonry walls providing a strong mechanical attachment in concrete block, brick or stone.

KEY	SKU	DESCRIPTION	MIN QTY
<b>E</b>	<b>RDCSP7250</b>	Viper Crawl Space Liner Pins – 1/4", 250/pack	1PK



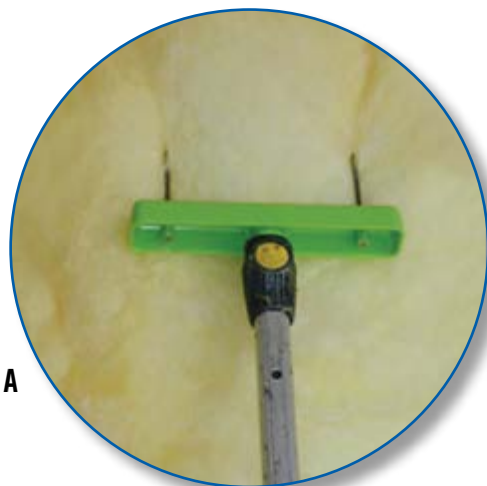

A



D



E

B

## (A) THE INSTALLER

The batt installer screws onto the tip of the BI7710 and BI6512 extension poles, allowing for easy installation of pressure-fit batt insulation and wire batt supports in both overhead and wall installations. Sold in pairs only.

KEY	SKU	DESCRIPTION	MIN QTY
A	BI102	The Installer, Batt Installation Tool	1PR

## (B) SMART-LOK® EXTENSION POLES

Quickly change roller frames or other tools with the push of a button for Quick-on/Quick-off action.

- Heavy-duty composite fiberglass handle
- Patented locking device

KEY	SKU	DESCRIPTION	MIN QTY
B	BI7710	Smart-Lok Extension Pole – 5' to 9'	1

## (C) TWIST LOCK® EXTENSION POLES

Combination smooth composite fiberglass handle and aluminum tube for balance. Die cast metal 3/4" (2 cm) threaded end and heavy duty chuck and collet locking device.

KEY	SKU	DESCRIPTION	MIN QTY
C	BI6512	Twist Lock Extension Pole – 6' to 12'	1

## (D) PRO WALL STRAPPING MATERIAL

This material is ideal for supporting fiberglass batts and is a true economic alternative to duct strapping. Made from 100% polyester so there is a low propensity for mold growth.

KEY	SKU	DESCRIPTION	ROLLS/CASE	MIN QTY
D	PW402250	ADO Pro Wall Strapping – 2" x 250'	120	1cs

## (E) WIRE BATT SUPPORTS

(ALSO KNOWN AS *TIGER TEETH*, *WIRE STAYS* AND *LIGHTNING RODS*)

Fastest, most economical method of installing roll and batt type insulation. Made of high tensile wire with angle cut to dig into wood. When installing batt supports space them 12" to 16" apart.

- Spring wire supports install with a twist of the wrist
- Holds permanently in floors, walls and ceilings

KEY	SKU	DESCRIPTION	LENGTH	QTY/BOX
E	SPIS12	Wire Batt Supports	12"	500
	IS16	Wire Batt Supports	16"	500
	IS17	Wire Batt Supports	17"	500
	IS18	Wire Batt Supports	18"	500
	SPIS19	Wire Batt Supports	19"	500
	IS20	Wire Batt Supports	20"	500
	SPIS23	Wire Batt Supports	23"	500
	IS24	Wire Batt Supports	24"	500
	IS25	Wire Batt Supports	25"	500
	SPIS26	Wire Batt Supports	26"	500
	IS28	Wire Batt Supports	28"	500



## (A) INSUL-HOLD

Unique design simplifies installation. Insulation is impaled on the 2-1/2" arrow prongs which are on 8" centers. Use with either 16" or 24" OC. Product is .025 to .028 thick and 1" wide. It is cold rolled and hot dipped galvanized with a dry finish.

- Holds rigid or batt insulation
- Doubles as reinforcement strapping

KEY	SKU	DESCRIPTION	MIN QTY
<b>A</b>	<b>MISCIH660</b>	Insul-Hold -100' Roll	1 RL

## (B) STANDARD INSULATION ANCHORS

Glued in place and used to support rigid board and batt type insulation on wall and ceiling applications. The anchors incorporate a 12-gauge spindle (nail) and a 2" x 2" square perforated base made of low carbon steel, galvanized coating.

KEY	SKU	DESCRIPTION	QTY/CARTON
<b>B</b>	<b>IHSP-162-12</b>	Anchors - 1-5/8"	1,000
	<b>IHSP-200-12</b>	Anchors - 2"	1,000
	<b>IHSP-250-12</b>	Anchors - 2-1/2"	1,000
	<b>IHSP-350-12</b>	Anchors - 3-1/2" Standard	500
	<b>IHSP-450-12</b>	Anchors - 4-1/2"	500
	<b>PIMPH5012M</b>	Anchors - 5-1/2"	500
	<b>0912-0650-4</b>	Anchors - 6-1/2"	500
	<b>IHSP-850-12</b>	Anchors - 8-1/2"	250
	<b>IHSP-950-12</b>	Anchors - 9-1/2"	250
	<b>IHSP-1050-12</b>	Anchors - 10-1/2"	250
	<b>IHSP-1150-12</b>	Anchors - 11-1/2"	250
	<b>IHSP-1250-12</b>	Anchors - 12-1/2"	250

## (C) ANCHOR ADHESIVE



High-strength, heavy-bodied, neoprene rubber adhesive. Specifically formulated for adhering insulation anchors. Coverage is one gallon of adhesive for every 500-1,000 hangers. Cannot be sold in California.

KEY	SKU	DESCRIPTION	MIN QTY
<b>C</b>	<b>IS101</b>	Anchor Adhesive - Gallon	1

## (D-F) SELF-LOCKING WASHERS

Round and square washers are mild steel, galvanized coating. The dome caps are aluminum material with a stainless steel insert.

KEY	SKU	DESCRIPTION	QTY/CARTON
<b>D</b>	<b>WAMK1512FRM</b>	Washers, Round, Self-Locking - 1-1/2"	1,000
<b>E</b>	<b>WAMK1512SM</b>	Washers, Square, Self-Locking - 1-1/2"	1,000
<b>F</b>	<b>IS013</b>	Washers, Dome Caps - 7/8" Diam	1,000
	<b>IS013W</b>	Washers, Dome Caps - 7/8" Diam, White	1,000

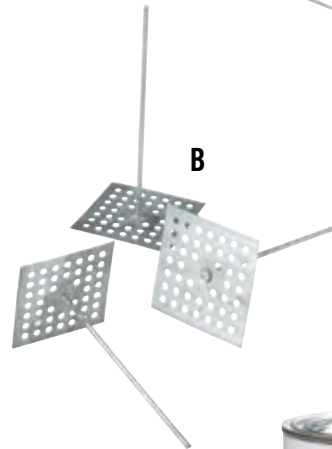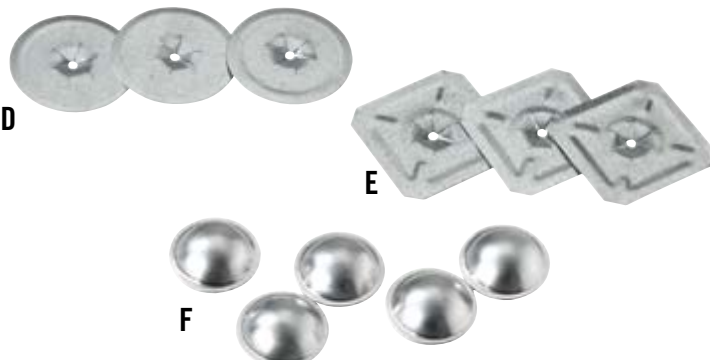



(A-B) SUR-PRO SUR-STILTS AND SUR-PRO QUADLOCK SINGLE-SIDED

Top-of-the-line adjustable height stilts. Spring tension (individually adjustable for natural leg movement) gives exactly the right “feel.” Telescoping legs slide smoothly for quick and easy adjustment without tools. Strap and shoe adapters included. Available in aluminum or magnesium—magnesium components offer enhanced durability and save 2 lbs. in weight per pair of stilts. The new Quadlock design incorporates an improved heel strap system, side pole key locks, double wingbolts, and an interlock system all adding to the safety and overall comfort of the stilts (not available in the 15"-23" sizes).

KEY	SKU	DESCRIPTION	MIN QTY
A	S1A1624	Sur-Pro Sur-Stilts – 16" - 24"	1 PR
	S1A2030	Sur-Pro Quadlock – 20" - 30"	1 PR
	S1A2640	Sur-Pro Quadlock – 26" - 40"	1 PR
B	S1M1624	Sur-Pro Sur-Stilts Magnesium – 16" - 24"	1 PR
	S1M2030	Sur-Pro Quadlock Magnesium – 20" - 30"	1 PR
	S1M2640	Sur-Pro Quadlock Magnesium – 26" - 40"	1 PR

Refer to schematics on page 67.  
Stilts cannot be sold in California.



(C-D) SUR-PRO SUR-STILTS AND SUR-PRO QUADLOCK DOUBLE-SIDED

The next generation of stilts! Double-sided Sur-Stilts surpass the capabilities of traditional stilts by providing:

- Better balance and safety
- Less fatigue
- More productivity

Available in aluminum or magnesium—magnesium components offer enhanced durability and save 2 lbs in weight per pair of stilts. The new Quadlock design incorporates an improved heel strap system, side pole key locks, double wingbolts, and an interlock system all adding to the safety and overall comfort of the stilts (not available in the 15"-23" sizes).




KEY	SKU	DESCRIPTION	MIN QTY
C	S2A2030	Double-Sided Sur-Pro Quadlock – 20" - 30"	1 PR
	S2A2640	Double-Sided Sur-Pro Quadlock – 26" - 40"	1 PR
D	S2M1624	Double-Sided Sur-Pro Sur-Stilts, Magnesium – 16" - 24"	1 PR
	S2M2030	Double-Sided Sur-Pro Quadlock, Magnesium – 20" - 30"	1 PR
	S2-M-2640	Double-Sided Sur-Pro Quadlock, Magnesium – 26" - 40"	1 PR


Refer to schematics on page 67.  
Stilts cannot be sold in California.



## SUR-STILTS SINGLE-SIDED PARTS SCHEMATIC

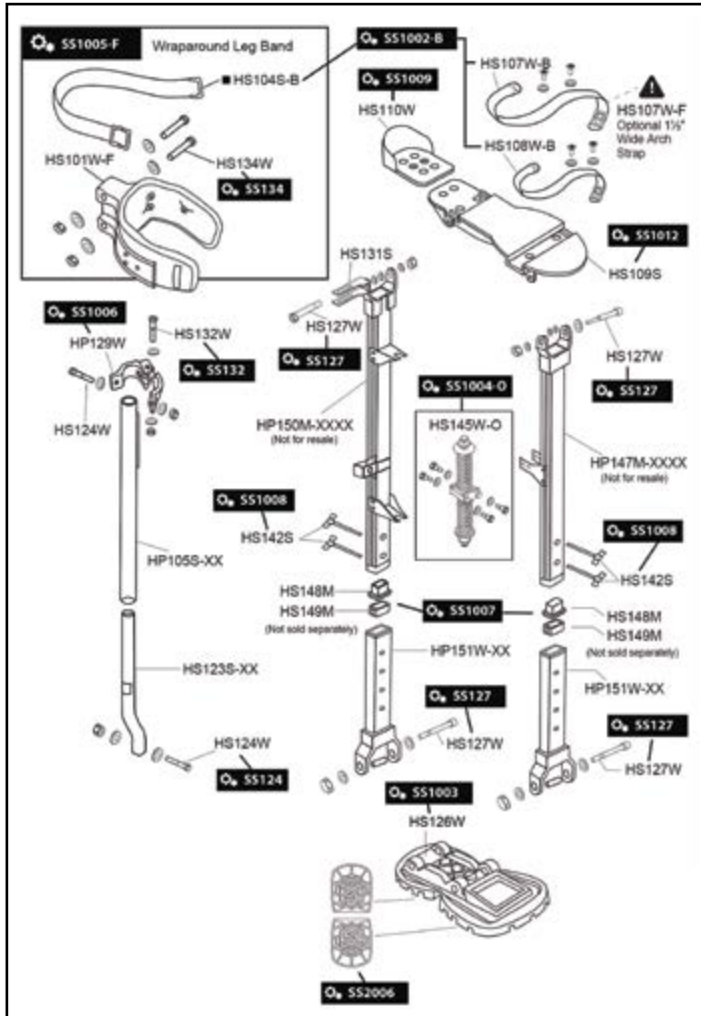

## QUADLOCK DOUBLE-SIDED PARTS SCHEMATIC

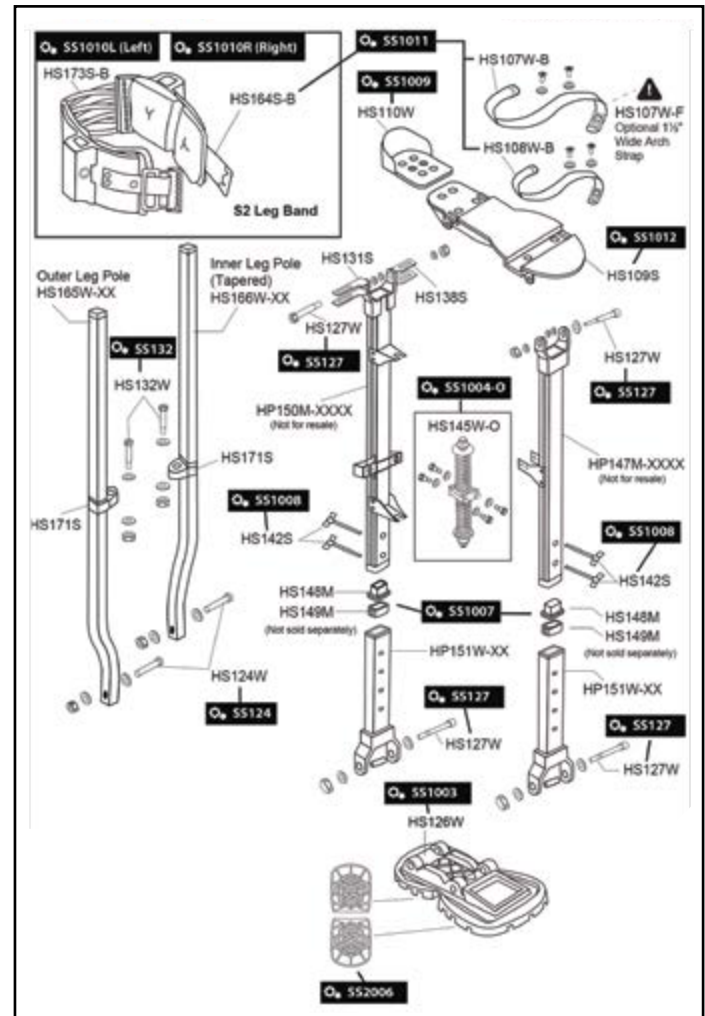



## PASLODE HT-550 CLASSIC


### PARTS SCHEMATIC

KEY	SKU	DESCRIPTION
2	5507A	Hammer Cap
3	5509	Channel Block
4	HT335	Pusher Bar
5	SFDFHT336	Handle Lid
6	HT382	Lever Assembly
7	HT341	Front Jaw
8	HT3991	Plunger Cam
9	HT4102	Grip
10	HT3151	Plunger Body
11	7053C	Driver Blade
12	7066	Spring
13	HT3032	Screw
14	HT1035	Feeder Spring Stud
15	724	Nut
16	727	Plunger Spring
18	HT3011	Cam Pin
19	730	Roll Pin
20	HT3031	Grip Screw
22	746	Handle Lid Stud
23	747	Handle Lid Stud Washer
24	HT1012	Jaw Pin
25	HT3091	Trip Lever Bushing
26	HT1011	Trip Pin
27	HT1071	Trip Knob
28	770A	Stud Pin
29	HT3092	Knob
	SFDF794	Stud & Bracket Assembly
31	SFHTPDFOR00760N	Jaw Pin O-Ring
	HRPXH10848	Safety Label
	HTPXH10856	Model Label
34	SFHTPDFXK1150	Feeder Spring Complete
35	HT3041	Split Ring


## BOSTITCH H30-6/H30-8

### PARTS SCHEMATIC

KEY	SKU	DESCRIPTION
1	H177844	Frame-Grip-Pad Assembly
2	H30603	Tacker Bumper
3	SPSFH30624	H30-6, Driver
3	H30619	H30-8, Driver
4	SFHUA380622	Tacker Screw, #10-24 x 3/8"
5	H30605	Tacker Top Guide
7	177846	Tracker Pusher
8	H30608	Tacker Pusher Spring
9	H30609	Tacker Roller
10	H30610	Tacker Pivot Pin
11	H30615	Tacker Return Spring

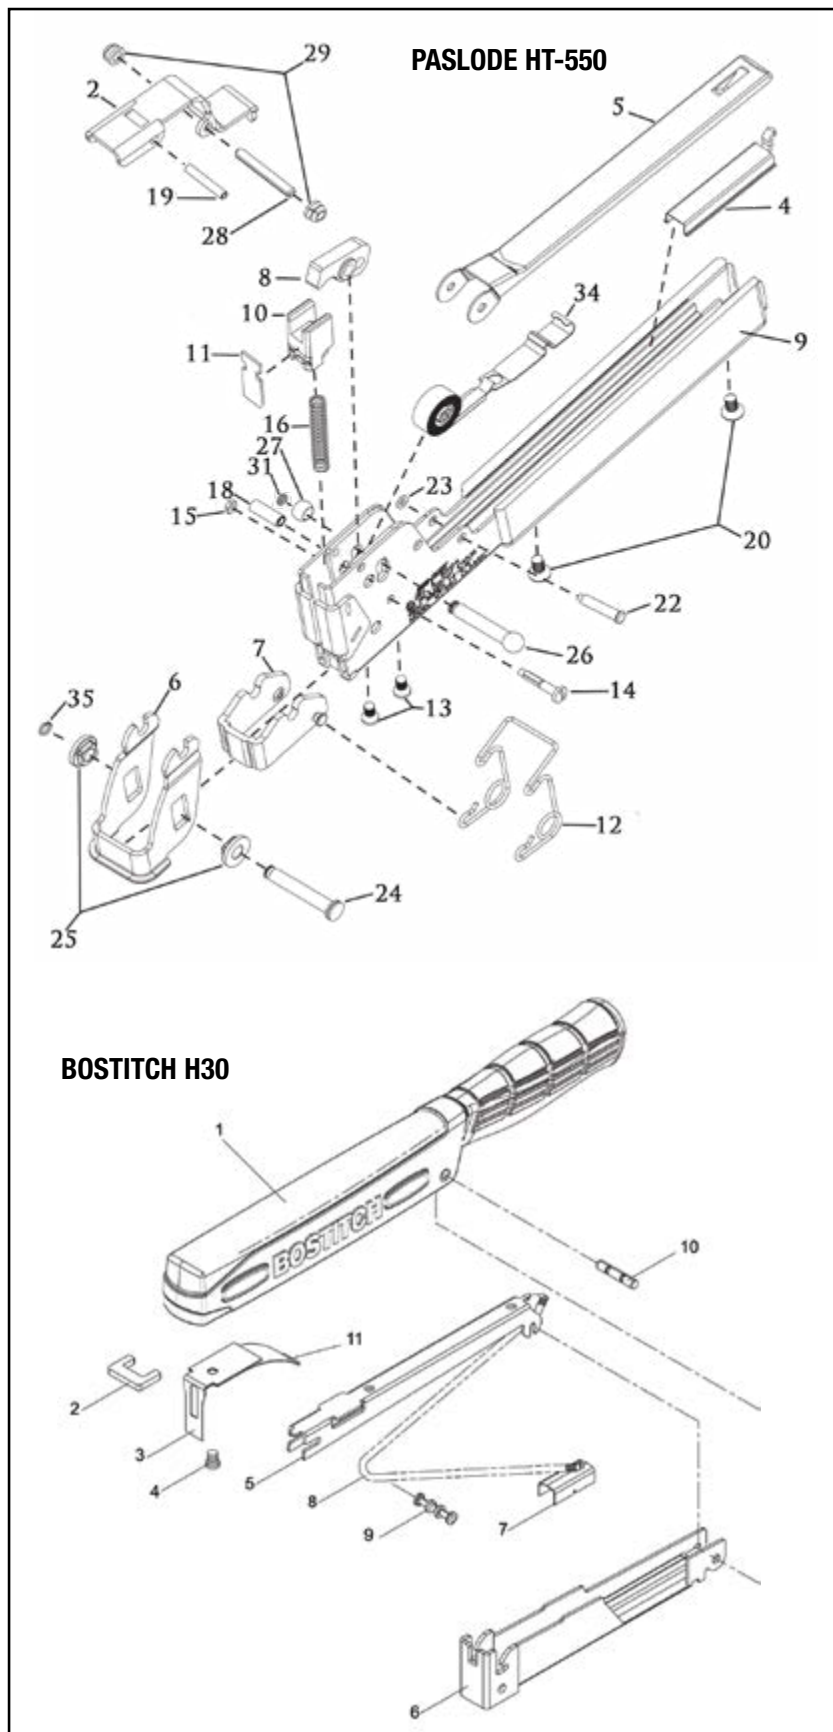


3M HALF-FACE RESPIRATOR, 6000 SERIES

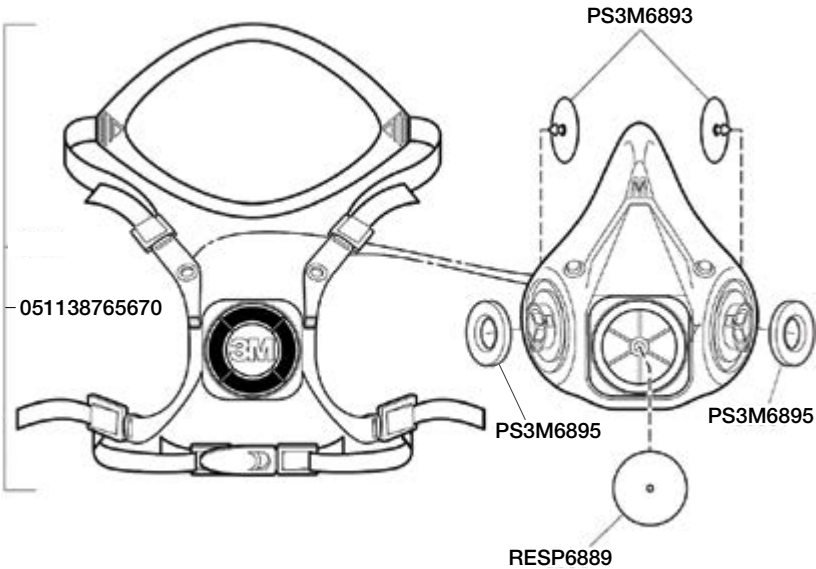

3M HALF-FACE RESPIRATOR, 6000 SERIES

PART NUMBER	DESCRIPTION
051138765670	Head Harness Assembly
PS3M6893	Inhalation Valve
PS3M6895	Inhalation Port Gasket
RESP6889	Exhalation Valve

3M FULL-FACE RESPIRATOR, 6000 SERIES

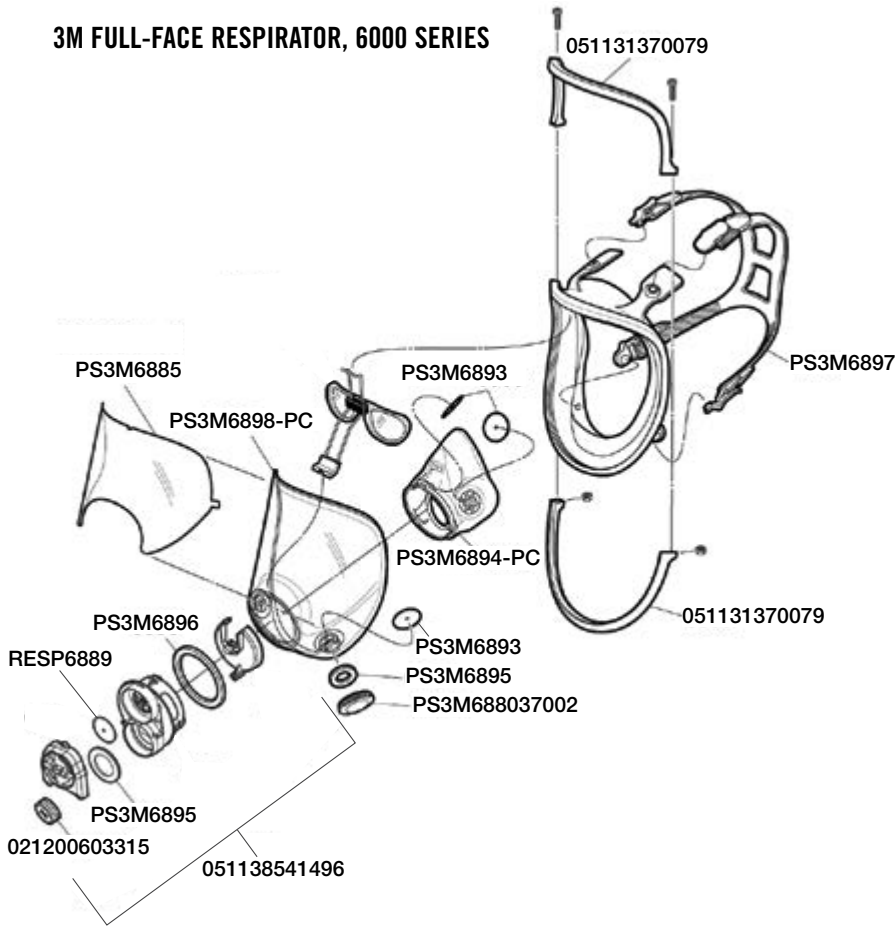

3M FULL-FACE RESPIRATOR, 6000 SERIES

PART NUMBER	DESCRIPTION
051131370024	Bayonet Cap
051138541496	Center Port Adapter
PS3M6885	Faceshield Cover – Clear
RESP6889	Exhalation Valve
PS3M6893	Inhalation Valve
PS3M6894-PC	Nose Cup Assembly
PS3M6895	Inhalation Port Gasket
PS3M6895	Inhalation Gasket
PS3M6896	Center Adapter Gasket
PS3M6897	Head Harness
PS3M6898-PC	Lens Assembly
051131370079	Frame Kit
021200603315	Plug

# PRODUCT INDEX

12V DC 100 Watt Inverter . . . . .	32
3M Disposable Respirators . . . . .	25
3M Foam Sealant Tape . . . . .	57
3M Full-Face Respirator . . . . .	26
3M Half-Face Respirator . . . . .	26
3M Hood Assembly . . . . .	21
3M Respirator Filter Cartridges . . . . .	25
3M Respirator Filter Disks . . . . .	25
3M Respirator Lens Assembly . . . . .	26
3M Respirator Replacement Parts . . . . .	26
3M Respirator Tube . . . . .	21
3M Versaflo Assembly . . . . .	21
3M Versaflo Battery . . . . .	21
3M Versaflo Battery Charger . . . . .	21
3M Versaflo Cartridges . . . . .	21

<b>A</b>	
Air Hoses . . . . .	44
Air Tool Oil . . . . .	44
Albion Caulk Guns . . . . .	32
Albion Electric Caulk Guns . . . . .	32
Allegro Air Bag . . . . .	23
Allegro Air Pump . . . . .	23
Allegro Respirator . . . . .	23
Aprilaire Dehumidifiers . . . . .	62
Asbestos Cutter Bit . . . . .	55
ASJ 30-J . . . . .	40
ASJ Insulation Tape . . . . .	37
Astro-Shield Reflective Insulation . . . . .	39

<b>B</b>	
B&C Eagle Pneumatic Tackers . . . . .	44
Backer Rod . . . . .	57
Batt Installation Tool . . . . .	64
Binks Heated Hose . . . . .	13
Binks IS30 Intellispray Proportioner . . . . .	13
Binks ST-1 Air Purge Gun . . . . .	13
Black Dragon Batt Knife . . . . .	58
Bosch Bi-Metal Hole Saws . . . . .	56
Bosch Hole Saw Replacement Parts . . . . .	56
Boss 136 Fireblock Draftstop Sealant . . . . .	30
Boss 355 Latex Caulk . . . . .	31
Boss 357 Acrylic Painter's Caulk . . . . .	31
Boss 360 Sealant . . . . .	31
Boss 363 Acrylic Latex Caulk w/ Silicone . . . . .	31
Boss 380 Contractors Silicone Sealant . . . . .	31
Boss 816 Intumescent Firestop Sealant . . . . .	30
Boss 920 Acrylic Elastomeric Latex w/ Silicone . . . . .	31
Boss Firestop Foam . . . . .	8
Boss Intertape Spray Adhesive . . . . .	33
Bostitch Staples . . . . .	43
Bostitch Tackers . . . . .	44
Brown Jersey Gloves . . . . .	29
Bullard Air Pump . . . . .	22
Bullard Calibration Kit . . . . .	22
Bullard Respirator Air Hose . . . . .	22
Bullard Respirator Tube . . . . .	22
Butyl Tape . . . . .	36

<b>C</b>	
Cardboard Baffles . . . . .	6
Caulk Warmer Bag Saver Sleeves . . . . .	32
Caulk Warming Bag . . . . .	32
Caution Barricade Tape . . . . .	17, 37
Chem Trend Insulation Release . . . . .	19
Chem Trend Spray Foam Flush . . . . .	19
Chem Trend Spray Foam Remover . . . . .	19
Crawl Curtain, Your Crawlspace . . . . .	62
Curry Comb . . . . .	15
Cutter Force . . . . .	16
Cylinder Warming Wrap . . . . .	15

<b>D</b>	
DC315 Intumescent Coating . . . . .	18
Dental Pick . . . . .	15
Derma-Max Gloves . . . . .	17
Dessicant Cartridge . . . . .	14
Diamondback Safety Glasses . . . . .	28
Double-Dot Gloves . . . . .	29
Dow Gasket Foam . . . . .	57
Dow Gasket Foam Gun . . . . .	57
Draftmaster Attic Stairway Insulator . . . . .	60
Drain Mat, Your Crawlspace . . . . .	62
Dry-Spray Nozzles . . . . .	46
Drywall Gasket . . . . .	57
Duct Tape . . . . .	36
Durovent . . . . .	4
Durovent Baffle . . . . .	5
Dynasolve Cleaning Solvent . . . . .	19

<b>E</b>	
Economy 1"x2" Mesh . . . . .	41
EcoSeal Plus Sealant . . . . .	57
Extension Poles, Smart-Lok . . . . .	64
Extension Poles, Twist Lock . . . . .	64
Eye Wash . . . . .	24
Eye Wear Cleaning Wipes . . . . .	28

<b>F</b>	
FiberForce Tall Hopper . . . . .	51
Fire Seal FS136R . . . . .	30
FIRESELL Thermal Barrier . . . . .	18
First-Aid Kit . . . . .	24
Fixed Blade Utility Knife . . . . .	59
Flex Tube Hose . . . . .	45
Flo Wall . . . . .	42
Foam Saw ISO Knives & Accessories . . . . .	16
Foam Wall Plugs . . . . .	54
FoamZall . . . . .	15
FoamZall Blades . . . . .	15
Foil Tape . . . . .	34
Force/2 High Power Next Gen . . . . .	51
FSK Facing R-3035 . . . . .	40
FSK Vapor Retarder Lamtec R3050 . . . . .	40

<b>G</b>	
Goggles . . . . .	24
Graco Fusion AP Sprayer . . . . .	12
Graco Fusion CS Sprayer . . . . .	12
Graco Fusion FX Sprayer . . . . .	12
Graco Fusion PC Sprayer . . . . .	12

Graco Heated Hose . . . . .	14
Graco Probler P2 Sprayer . . . . .	12
Graco Reactor 3 E-30 Proportioner . . . . .	12
Graco Ultra Max 795 Airless Sprayer . . . . .	57
Graphite Powder . . . . .	48
G-Tek Gloves . . . . .	29

<b>H</b>	
HandiFoam Applicator Guns . . . . .	10
HandiFoam Black Sealant . . . . .	10
HandiFoam Channel Fill . . . . .	11
HandiFoam Class 1 . . . . .	11
HandiFoam Extension Tips . . . . .	10
HandiFoam Extreme . . . . .	10
HandiFoam Fireblock . . . . .	10
HandiFoam Foam Cleaner . . . . .	10
HandiFoam Low Density . . . . .	11
HandiFoam Spray Foam Hoses . . . . .	11
HandiFoam Spray Foam Nozzles . . . . .	11
HandiFoam Tank Foam Sealant . . . . .	11
HandiFoam Window/Door . . . . .	10
Hard Hat . . . . .	28
Hard Hat w/Ratchet . . . . .	28
Hose Clamps . . . . .	46
Hose Warming Wrap . . . . .	15
Husky Contractor Bags . . . . .	17
Husky Plastic Sheeting . . . . .	38

<b>I</b>	
Insulation Anchor Adhesive . . . . .	65
Insulation Anchors . . . . .	65
Insulator's 2-Pocket Leather Tool Pouch . . . . .	59
Insul-Door . . . . .	60
Insul-Hold . . . . .	65
Insul-Lite Recessed Light Cover . . . . .	61
Insul-Shield . . . . .	61
Intec Hose Reels . . . . .	46
Intec Power Cords . . . . .	51
Intec Stud Scrubber . . . . .	48
Intec Turbo Force Hp3 Wireless . . . . .	51
Intec Vortec Twin Turbo . . . . .	52
Intec Vortec Beast Vacuum . . . . .	52
Intec Vortec Cannon Vacuum . . . . .	52
Intec Vortec Mega Beast Vacuum . . . . .	52
Intec Vortec Vacshield . . . . .	52

<b>J</b>	
Josef Kihlberg Pneumatic Tackers . . . . .	44

<b>K</b>	
Krendl 2300 Blowing Machine . . . . .	50
Krendl 2800-G Blowing Machine . . . . .	50
Krendl 4000-G-A Blowing Machine . . . . .	50
Krendl 425 Blowing Machine . . . . .	49
Krendl 475 Blowing Machine . . . . .	49
Krendl 575 Blowing Machine . . . . .	49
Krendl Flex-Thane Hose . . . . .	45
Krendl GV240 Vacuum . . . . .	53
Krendl KV180 Vacuum . . . . .	53
Krendl Power Cords . . . . .	49
Krendl Stud Scrubber . . . . .	48
Krendl Stud Scrubber Parts . . . . .	48



Krendl Vacuum Defender . . . . .	53	PSK Facing WMP-10 . . . . .	40	T	Tenmat Recessed Light Covers . . . . .	61
Krendl Wet Spray Tips, Screw-In . . . . .	47	PSK Facing WMP-50 . . . . .	40	The Shoot Vent. . . . .	6	
Krendl Wet-Spray Nozzles, 2-Jet . . . . .	47	PSK Facing WMP-VR . . . . .	40	Titebond Radon Sealant . . . . .	33	
Krendl Wet-Spray Nozzles, 4-Jet . . . . .	47	Pull Down Ladder Jacket w/ Pocket . . . . .	60	Tuff-Stuff Concrete Insulation . . . . .	39	
Krendl Wet-Spray Tips, Quick Connect . . . . .	47	Pump & Motor . . . . .	47	Tyvek Alternative Keyguard Coverall. . . . .	20	
<b>L</b>				Tyvek Coverall . . . . .	20	
Latex Palm Coat Gloves . . . . .	29	<b>R</b>		Tyvek Hood Assembly . . . . .	23	
Leather Batt Knife Sheath . . . . .	58	R+Heatshield Radiant Barrier . . . . .	39	<b>U</b>		
Leather Belt . . . . .	59	Rapid Tackers . . . . .	44	Urethane Flex Hose . . . . .	45	
Leather Work Gloves . . . . .	29	Regular Plastic Wall Plugs . . . . .	54	Utility Knife Replacement Blades . . . . .	59	
LED Headlamp . . . . .	29	Relton Carbide-Tooth Stucco Hole Saws . . . . .	55	<b>V</b>		
Lens Covers . . . . .	24	Relton Hole Saw Replacement Parts . . . . .	55	Vacuum Bags . . . . .	53	
Light Duty 1/6" Mesh . . . . .	41	Relton Steel-Tooth Wood Hole Saws . . . . .	55	Vacuum Suction Tube . . . . .	53	
Liner Pins, Viper CS . . . . .	63	Respirator Air Hose . . . . .	23	Vacuum, Intec . . . . .	52	
Low Flow Adapter . . . . .	23	Retractable Blade Utility Knife . . . . .	59	Vacuum, Krendl . . . . .	53	
<b>M</b>		R-Value Ruler . . . . .	48	Value Line Coverall . . . . .	20	
Magic Adhesive, Your Crawlspace . . . . .	62	<b>S</b>		Value-Touch Gloves . . . . .	17	
Manus-Bond 50-AC Acoustical Sealant . . . . .	33	Schematics, Respirators . . . . .	69	Vapor Barrier System, Your Crawlspace . . . . .	62	
Mark E-2 Hose . . . . .	45	Schematics, Stilts . . . . .	67	Vapor Barrier, Viper CS . . . . .	63	
Mark II Hose . . . . .	45	Schematics, Tackers . . . . .	68	Vapor Tape, Viper CS . . . . .	63	
Masking Tape . . . . .	36	Scott Rags in a Box . . . . .	17	Venture FSK Tape . . . . .	37	
Medium Duty 1/4" Mesh . . . . .	41	Seam Tape, Your Crawlspace . . . . .	62	Versi-Foam Class 1 . . . . .	7	
Membrain Vapor Barrier . . . . .	38	Self-Feed Wood Bits . . . . .	56	Versi-Foam HFO . . . . .	7	
MicroMax NS Coverall . . . . .	20	Self-Locking Washers . . . . .	65	Versi-Foam Hoses . . . . .	7	
Moldex Disposable Respirators . . . . .	27	Sheathing Tape . . . . .	34	Versi-Foam Nozzles & Fan Tips . . . . .	7	
Moldex Full-Face Respirator . . . . .	27	Shoe Covers . . . . .	20	Vintool Batt Knife . . . . .	58	
Moldex Half-Face Respirator . . . . .	27	Sidewinder Sleeve & Accessories . . . . .	14	Vinyl Tape . . . . .	36	
Moldex Lens Cover . . . . .	27	Sill Seal . . . . .	57	Viper Double Bond Tape . . . . .	37	
Moldex Respirator Filter Cartridges . . . . .	28	Solar Powered Attic Ventilation . . . . .	60	Viper Vapor Tape . . . . .	37	
<b>N</b>		Soudabond Power Spray . . . . .	33	<b>W</b>		
No-Burn Intumescent Coating . . . . .	18	Soudafoam Hoses . . . . .	9	Wall Attachment Tape, Your Crawlspace . . . . .	62	
No-Burn Plus ThB Intumescent Coating . . . . .	18	Soudafoam MAXTWP HFO . . . . .	9	Wall Scraper . . . . .	15	
NSX Turbo Safety Glasses . . . . .	28	Soudafoam Nozzles . . . . .	9	Wall Tubing . . . . .	45	
<b>O</b>		Soudal All Season Foam . . . . .	8	Water Hose . . . . .	47	
OLFA XHD Cutter Knife . . . . .	59	Soudal Applicator Guns . . . . .	8	Water-Based Duct Sealant . . . . .	33	
OLFA XHD Replacement Blades . . . . .	59	Soudal Fireblock Foam . . . . .	8	Windblock . . . . .	4	
<b>P</b>		Soudal Flex Foam . . . . .	8	Wire Batt Supports . . . . .	64	
Painters Tape . . . . .	36	Soudal Foam Gun Replacement Tips . . . . .	8	Wood Bit Replacement Parts . . . . .	56	
Paslode Staples 5000 Series . . . . .	43	Soudal Foam Replacement Tips . . . . .	8	Wood Handle Batt Knife . . . . .	58	
Paslode Tackers . . . . .	44	Soudal Gun & Foam Cleaner . . . . .	8	Wood Wall Plugs . . . . .	54	
Pier Wrap, Viper CS . . . . .	63	Soudal Window/Door Foam . . . . .	8			
Piranha Spray Foam Tools . . . . .	16	Spectrum Lens Cover . . . . .	22			
Plastic Long Nose Wall Plugs . . . . .	54	Spectrum Respirator Mask . . . . .	22			
Plastic Reducers . . . . .	46	Spill Kit . . . . .	24			
Poly Recessed Light Covers . . . . .	61	Spray Socks . . . . .	24			
Poly Tape . . . . .	35	Staples . . . . .	43			
Powerblanket Drum Heater . . . . .	14	Steel Connectors . . . . .	46			
Pro Cleaner, Your Crawlspace . . . . .	62	Steel Reducers . . . . .	46			
Pro Impact Gloves . . . . .	29	Stoner E238 Anti-Stick . . . . .	19			
Pro Pac . . . . .	42	Sump Kit, Your Crawlspace . . . . .	62			
Pro Wall 50 Plus . . . . .	42	Super Shear Foam Saw . . . . .	16			
Pro Wall Strapping Material . . . . .	63	Sur-Pro Quadlock Double-Sided . . . . .	66			
Pro Web . . . . .	42	Sur-Pro Quadlock Single-Sided . . . . .	66			
ProShield Coverall . . . . .	20	Sur-Pro Sur-Stilts Double-Sided . . . . .	66			
Protective Sleeves . . . . .	20	Sur-Pro Sur-Stilts Single-Sided . . . . .	66			
proVent . . . . .	4	Swivel Connectors . . . . .	46			
proVent Baffle & Extension . . . . .	5					

# A·D·O<sup>®</sup>

PRODUCTS YOU NEED. SERVICE WE DELIVER.



# **NEW** PRODUCT ADDITIONS



### 3M SUPER 77 MULTI-PURPOSE SPRAY ADHESIVE

- Designed exclusively for industrial applications.
- Aggressive Tack - Offers a fast, medium-strength initial grab.
- Reposition & Adjust - Features sufficient open time to properly position and bond materials.
- High-Solids Content - Supports low soak-in to help provide high coverage and soft, non-dimpling adhesive lines.
- Versatile Adhesive - Bonds paper, corrugated cardboard, fabric, foam, wood, and more.

SKU	DESCRIPTION	U OF M
<b>CA3M77-24E1</b>	Super 77 Multi-Purpose Spray Adhesive, 12 – 18oz cans/case, 64 cases/pallet	Case(s)

### HANDI-FOAM PRO ADHESIVE

Perfect for sub-floor installations, Handi-Foam Pro Adhesive adheres to wet, dry or frozen lumber. Easy to apply in cold temperatures. Reduces fastener use, nail pops and squeaks. The adhesive has a 20 minute open time and contains no solvents.

SKU	DESCRIPTION	U OF M
<b>FSHS24AG</b>	Handi-Foam Pro Adhesive, 12 – 24oz cn/cs	Case(s)



### HANDI-FOAM FIREBLOCK WEST AND WINDOW & DOOR WEST

Traditional one-component polyurethane foams may struggle to cure in hot and dry climates. The same great Handi-Foam Fireblock and Window & Door products are now formulated in an open cell format designed to overcome these challenges.

KEY	SKU	DESCRIPTION	U OF M
<b>A</b>	<b>P30185</b>	Handi-Foam Fireblock West, 12 – 24oz cn/cs	Case(s)
<b>B</b>	<b>P30273</b>	Handi-Foam Window & Door West, 12 – 24oz cn/cs	Case(s)





## BIG WIPE HEAVY DUTY PRO+

Big Wipes Heavy Duty Pro+ cleaning wipes removes paint, adhesive, expanding foam, and more. They are skin-friendly, clinically proven wipes that are suitable for hands, tools, and a variety of surfaces. The wipes feature a textured fabric that is perfect for tough stuck on dirt and come with a quick-seal lid to prevent drying out. Use the Big Wipes Cage to mount Big Wipes cleaning rags anywhere that you want easy, convenient access.

KEY	SKU	DESCRIPTION	U OF M
<b>A</b>	<b>6002 0046-EA</b>	Big Wipes Heavy Duty Pro+, 80ct	Each
<b>B</b>	<b>2421 0000-EA</b>	Big Wipes The Cage	Each



## ULTRA SPRAY FOAM MOON SUIT

These coveralls are the go-to choice for protective wear on the job-site. The reusable moon suit is breathable, lightweight, durable and is made with a cool cotton back and a rip-stop nylon front. They include a full pull over hood, hook-and-loop wrists and ankle closures, zipper front, front and back pockets, and elastic waist.

SKU	DESCRIPTION	SIZE	U OF M
<b>UBSPF-M</b>	Ultra Spray Foam Moon Suit w/ Hood	Md	Each
<b>UBSPF-L</b>	Ultra Spray Foam Moon Suit w/ Hood	Lg	Each
<b>UBSPF-XL</b>	Ultra Spray Foam Moon Suit w/ Hood	XL	Each
<b>UBSPF-2XL</b>	Ultra Spray Foam Moon Suit w/ Hood	2XL	Each
<b>UBSPF-3XL</b>	Ultra Spray Foam Moon Suit w/ Hood	3XL	Each

## HI-VIS SAFETY CLOTHING

**HI-VIS VEST** - ANSI Type R Class 2, 2" Reflective Tape, 2 Pockets, Zipper, Mesh Vest.

KEY	SKU	DESCRIPTION	SIZE	U OF M
<b>C</b>	<b>PS302-0702Z-LY/M</b>	Class 2, Hi-Vis Yellow, Mesh Vest, 2 Pockets	Md	Each
	<b>PS302-0702Z-LY/L</b>	Class 2, Hi-Vis Yellow, Mesh Vest, 2 Pockets	Lg	Each
	<b>PS302-0702Z-LY/XL</b>	Class 2, Hi-Vis Yellow, Mesh Vest, 2 Pockets	XL	Each
	<b>PS302-0702Z-LY/2X</b>	Class 2, Hi-Vis Yellow, Mesh Vest, 2 Pockets	2XL	Each



## PAINTERS SPRAY SOCK

Provides comfortable protection against overspray and other particulates. Spray socks fits over the head and can be worn with goggles, half-mask, full-mask respirators.

SKU	DESCRIPTION	U OF M
1412	Painters Spray Sock, One Size, 12/pack	Pack(s)



## COTTON BROWN JERSEY 7 OZ. GLOVES

Protect your hands with these lightweight, 7 oz. gloves. The cleft cut style and cotton/polyester blend provides a comfortable fit with a snug elastic wrist to help keep out debris.

SKU	DESCRIPTION	U OF M
C70BJ	Jersey Eco 7oz. Gloves, Brown	Pair(s)

## STRING KNIT GLOVES

Our multi-purpose string knit gloves are ideal for general hand protection in light-duty tasks. These 7 gauge, standard weight gloves are made of 100% cotton, making it ideal for low heat protection and as a liner glove. Available in Seamless Ambidextrous (A) and Ambidextrous with Black PVC Dots (B).

KEY	SKU	DESCRIPTION	U OF M
A	S55	String Knit Gloves, Seamless Ambidextrous	Pair(s)
B	S55D2	String Knit Gloves, Ambidextrous, Black PVC Dots	Pair(s)



## STRING KNIT COATED GLOVES

These 10-gauge gloves combine poly/cotton and nitrile to ensure superior gripping strength while also providing consistent warmth and comfort. Dipped nitrile portion of glove features a flexible style that allows for breathable movement in dry environments. Each glove is hemmed with a knit wrist cuff to secure fully coated coverage.

SKU	DESCRIPTION	U OF M
S966E	String Knit, Med Weight, Eco Blue Solid Nitrile	Pair(s)



### POLYURETHANE DIPPED WORK GLOVES

These 13-gauge seamless work gloves are polyurethane dipped and designed for precision and comfort in demanding environments. Made with a polyurethane palm coating and polyester liner, these gloves provide superior grip, flexibility, and durability.

SKU	DESCRIPTION	SIZE	U OF M
<b>PUG-10-M</b>	Polyurethane Dipped, 13 Gauge, Black	Md	Pair(s)
<b>PUG-10-L</b>	Polyurethane Dipped, 13 Gauge, Black	Lg	Pair(s)
<b>PUG-10-XL</b>	Polyurethane Dipped, 13 Gauge, Black	XL	Pair(s)

### POLYURETHANE COATED CUT RESISTANT KNIT GLOVE

This seamless glove features a 13-gauge HPPE fiber liner. The shell is enhanced by a polyurethane-dipped palm and a comfortable knit. Superior grip and comfort, great dexterity, wrist cuff prevents gloves from slipping off during use. Meets ANSI/ISEA 105-2016 standard, Cut Level A4, Abrasion Level 6, Puncture Level 4.

SKU	DESCRIPTION	SIZE	U OF M
<b>PUG-611-M</b>	Cut Resistant Polyurethane Dipped Glove	Md	Pair(s)
<b>PUG-611-L</b>	Cut Resistant Polyurethane Dipped Glove	Lg	Pair(s)
<b>PUG-611-XL</b>	Cut Resistant Polyurethane Dipped Glove	XL	Pair(s)



A·D·O®

PRODUCTS YOU NEED. SERVICE WE DELIVER.

[www.adoproducts.com](http://www.adoproducts.com)

CONTACT YOUR SALES REPRESENTATIVE TODAY.  
**800-666-8191**



**PRODUCTS YOU NEED. SERVICE WE DELIVER.**



**A·D·O.<sup>®</sup>**

PRODUCTS YOU NEED. SERVICE WE DELIVER.

**800-666-8191**

[sales@adoproducts.com](mailto:sales@adoproducts.com)

[www.adoproducts.com](http://www.adoproducts.com)

PROUD MEMBER OF  
INSULATION CONTRACTORS  
**ICAA**  
ASSOCIATION OF AMERICA